

**REGISTRATION PENDING**

Currently Available as FRM440(D, R, H)

December 1992

**Radiation Hardened  
N-Channel Power MOSFETs**
**Features**

- 6A, 500V,  $R_{DS(on)}$  = 1.40Ω
- Second Generation Rad Hard MOSFET Results From New Design Concepts
- Gamma
  - Meets Pre-Rad Specifications to 100KRAD(SI)
  - Defined End Point Specs. at 300KRAD(SI) and 1000KRAD(SI)
  - Performance Permits Limited Use to 3000KRAD(SI)
- Gamma Dot
  - Survives 3E9RAD(SI)/sec at 80% BVDSS Typically
  - Survives 2E12 Typically If Current Limited to IDM
- Photo Current
  - 12.0nA Per-RAD(SI)/sec Typically
- Neutron
  - Pre-RAD Specifications for 3E12 Neutrons/cm<sup>2</sup>
  - Usable to 3E13 Neutrons/cm<sup>2</sup>
- Single Event
  - Typically Survives 1E5Ions/cm<sup>2</sup> Having an LET ≤ 35MeV/mg/cm<sup>2</sup> and a Range ≥ 30μm at 80% BVDSS

**Description**


The Harris Semiconductor Sector has designed a series of SECOND GENERATION hardened power MOSFETs of both N and P channel enhancement types with ratings from 100V to 500V, 1A to 60A, and on resistance as low as 25mΩ. Total dose hardness is offered at 100K RAD(SI) and 1000KRAD(SI) with neutron hardness ranging from 1E13n/cm<sup>2</sup> for 500V product to 1E14n/cm<sup>2</sup> for 100V product. Dose rate hardness (GAMMA DOT) exists for rates to 1E9 without current limiting and 2E12 with current limiting. Heavy ion survival from signal event drain burn-out exists for linear energy transfer (LET) of 35 at 80% of rated voltage.

This MOSFET is an enhancement-mode silicon-gate power field effect transistor of the vertical DMOS (VDMOS) structure. It is specially designed and processed to exhibit minimal characteristic changes to total dose (GAMMA) and neutron (n<sup>0</sup>) exposures. Design and processing efforts are also directed to enhance survival to heavy ion (SEE) and/or dose rate (GAMMA DOT) exposure.

This part may be supplied as a die or in various packages other than shown above. Reliability screening is available as either non TX (commercial), TX equivalent of MIL-S-19500, TXV equivalent of MIL-S-19500, or space equivalent of MIL-S-19500. Contact the Harris Semiconductor High-Reliability Marketing group for any desired deviations from the data sheet.

**Package**

TO-204AA


**Symbol**

**Absolute Maximum Ratings (TC = +25°C Unless Otherwise Specified)**

	2N7289D, R, H	UNITS
Drain-Source Voltage.....	VDS	V
Drain-Gate Voltage (RGS = 20kΩ).....	VDGR	V
Continuous Drain Current		
TC = +25°C .....	ID	A
TC = +100°C .....	ID	A
Pulsed Drain Current .....	IDM	A
Gate-Source Voltage .....	VGS	V
Maximum Power Dissipation		
TC = +25°C .....	PT	W
TC = +100°C .....	PT	W
Derated Above +25°C .....	1.00	W/°C
Inductive Current, Clamped, L = 100μH, (See Test Figure).....	ILM	A
Continuous Source Current (Body Diode) .....	IS	A
Pulsed Source Current (Body Diode) .....	ISM	A
Operating And Storage Temperature .....	TJC, TSTG	°C
Lead Temperature (During Soldering)		
Distance > 0.063 in. (1.6mm) From Case, 10s Max.....	TL	°C

CAUTION: These devices are sensitive to electrostatic discharge. Users should follow proper I.C. Handling Procedures.

Copyright © Harris Corporation 1992

 File Number **3235**

**Specifications 2N7289D, 2N7289R, 2N7289H - Registration Pending**

**Pre-Radiation Electrical Specifications** TC = +25°C, Unless Otherwise Specified

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS		UNITS
			MIN	MAX	
Drain-Source Breakdown Volts	BVDSS	VGS = 0, ID = 1mA	500	-	V
Gate-Threshold Volts	VGS(th)	VDS = VGS, ID = 1mA	2.0	4.0	V
Gate-Body Leakage Forward	IGSSF	VGS = +20V	-	100	nA
Gate-Body Leakage Reverse	IGSSR	VGS = -20V	-	100	nA
Zero-Gate Voltage Drain Current	IDSS1 IDSS2 IDSS3	VDS = 500V, VGS = 0 VDS = 400V, VGS = 0 VDS = 400V, VGS = 0, TC = +125°C	- - -	1 0.025 0.25	mA
Rated Avalanche Current	IAR	Time = 20μs	-	18	A
Drain-Source On-State Volts	VDS(on)	VGS = 10V, ID = 6A	-	8.82	V
Drain-Source On Resistance	RDS(on)	VGS = 10V, ID = 4A	-	1.40	Ω
Turn-On Delay Time	td(on)	VDD = 250V, ID = 6A Pulse Width = 3μs Period = 300μs, Rg = 25Ω 0 ≤ VGS ≤ 10 (See Test Circuit)	-	60	ns
Rise Time	tr		-	84	
Turn-Off Delay Time	td(off)		-	476	
Fall Time	tf		-	116	
Gate-Charge Threshold	QG(th)	VDD = 250V, ID = 6A IGS1 = IGS2 0 ≤ VGS ≤ 20	2	8	nc
Gate-Charge On State	QG(on)		32	128	
Gate-Charge Total	QGM		65	250	
Plateau Voltage	VGP		3	12	V
Gate-Charge Source	QGS		6	24	nc
Gate-Charge Drain	QGD		11	46	
Diode Forward Voltage	VSD	ID = 6A, VGD = 0	0.6	1.8	V
Reverse Recovery Time	TT	I = 6A; dI/dt = 100A/μs	-	TBD	ns
Junction-To-Case	Rθjc		-	1.0	°C/W
Junction-To-Ambient	Rθja	Free Air Operation	-	30	




FIGURE 1. SWITCHING TIME TESTING

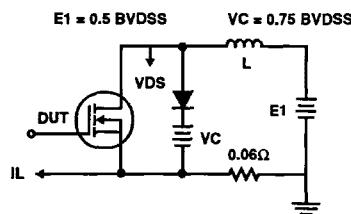


FIGURE 2. CLAMPED INDUCTIVE SWITCHING, ILM

**Specifications 2N7289D, 2N7289R, 2N7289H - Registration Pending**

**Post-Radiation Electrical Specifications** TC = +25°C, Unless Otherwise Specified

PARAMETER	SYMBOL	TYPE	TEST CONDITIONS	LIMITS		UNITS	
				MIN	MAX		
Drain-Source Breakdown Volts	(Note 4, 6)	BVDSS	2N7289D, R	VGS = 0, ID = 1mA	500	-	V
	(Note 5, 6)	BVDSS	2N7289H	VGS = 0, ID = 1mA	475	-	V
Gate-Source Threshold Volts	(Note 4, 6)	VGS(th)	2N7289D, R	VGS = VDS, ID = 1mA	2.0	4.0	V
	(Note 3, 5, 6)	VGS(th)	2N7289H	VGS = VDS, ID = 1mA	1.5	4.5	V
Gate-Body Leakage Forward	(Note 4, 6)	IGSSF	2N7289D, R	VGS = 20V, VDS = 0	-	100	nA
	(Note 5, 6)	IGSSF	2N7289H	VGS = 20V, VDS = 0	-	200	nA
Gate-Body Leakage Reverse	(Note 2, 4, 6)	IGSSR	2N7289D, R	VGS = -20V, VDS = 0	-	100	nA
	(Note 2, 5, 6)	IGSSR	2N7289H	VGS = -20V, VDS = 0	-	200	nA
Zero-Gate Voltage Drain Current	(Note 4, 6)	IDSS	2N7289D, R	VGS = 0, VDS = 400V	-	25	µA
	(Note 5, 6)	IDSS	2N7289H	VGS = 0, VDS = 400V	-	100	µA
Drain-Source On-State Volts	(Note 1, 4, 6)	VDS(on)	2N7289D, R	VGS = 10V, ID = 6A	-	8.82	V
	(Note 1, 5, 6)	VDS(on)	2N7289H	VGS = 16V, ID = 6A	-	13.20	V
Drain-Source On Resistance	(Note 1, 4, 6)	RDS(on)	2N7289D, R	VGS = 10V, ID = 4A	-	1.40	Ω
	(Note 1, 5, 6)	RDS(on)	2N7289H	VGS = 14V, ID = 4A	-	2.10	Ω

**NOTES:**

1. Pulse test, 300µs max
2. Absolute value
3. Gamma = 300KRAD(Si)
4. Gamma = 10KRAD(Si) for "D", 100KRAD(Si) for "R". Neutron = 3E12
5. Gamma = 1000KRAD(Si). Neutron = 3E12
6. Insitu Gamma bias must be sampled for both VGS = +10V, VDS = 0V and VGS = 0V, VDS = 80% BVDSS
7. Gamma data taken 3/15/90 on TA 17645 devices by GE ASTRO SPACE; EMC/SURVIVABILITY LABORATORY; KING OF PRUSSIA, PA 19401
8. Single event drain burnout testing by Titus, J.L., et al of NWSC, Crane, IN at Brookhaven Nat. Lab. Dec 11-14, 1989
9. Neutron derivation, HARRIS Application note AN-8831, Oct. 1988

**Typical Performance Characteristics**

