


Four Digit

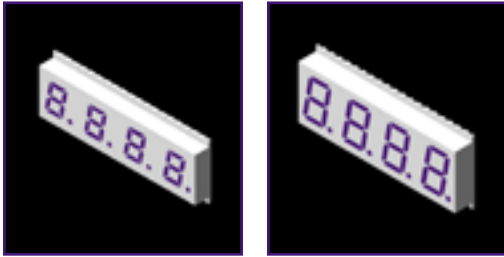


Features/Options

- ▶ Standard and high brightness chips
- ▶ Intensity grading available
- ▶ Easy use packaging in reels or tubes
- ▶ SMT package eliminates through hole soldering

Applications/Uses


- ▶ Panel meter displays
- ▶ Time lapsed panels
- ▶ Diagnostic equipment
- ▶ Counter displays

0.20" four digit

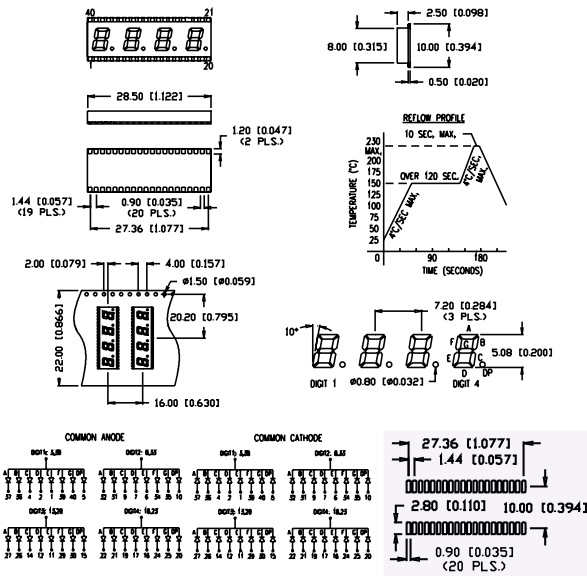

Part Number	Wave Length (nm)	Brightness (μcd @ 10mA)	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (column)
LDQ-SMA2002RI-TR	565	2500	2.2	2.6	Green	Anode
LDQ-SMA2004RI-TR	635	2500	2.0	2.5	Red	Anode
LDQ-SMA2006RI-TR	660	8000	1.7	2.2	Red	Anode
LDQ-SMA2002RISUGTR	574	7000	2.2	2.6	Green	Anode
LDQ-SMA2004RI-SITR	636	15,000	2.0	2.6	Red	Anode
LDQ-SMA2007RIUSBTR	470	6000	3.5	4.0	Blue	Anode
LDQ-SMC2002RI-TR	565	2500	2.2	2.6	Green	Cathode
LDQ-SMC2004RI-TR	635	2500	2.0	2.5	Red	Cathode
LDQ-SMC2006RI-TR	660	8000	1.7	2.2	Red	Cathode
LDQ-SMC2002RISUGTR	574	7000	2.2	2.6	Green	Cathode
LDQ-SMC2004RI-SITR	636	15,000	2.0	2.6	Red	Cathode
LDQ-SMC2007RIUSBTR	470	6000	3.5	4.0	Blue	Cathode

0.30" four digit

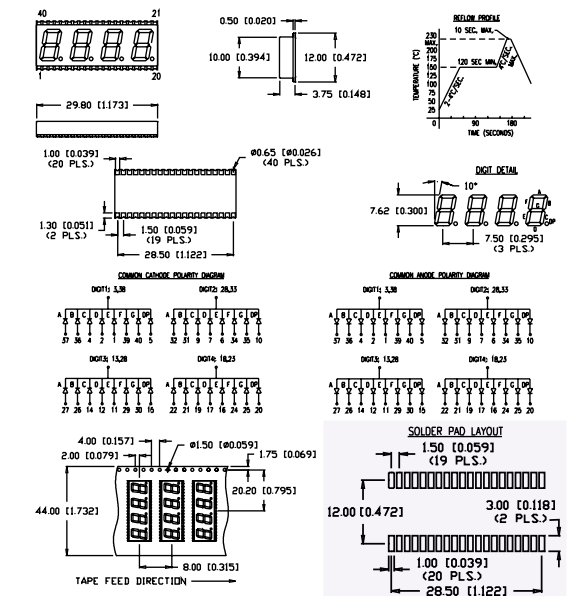

Part Number	Wave Length (nm)	Brightness (μcd @ 10mA)	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (column)
LDQ-SMA3002RI-TR	565	2500	2.2	2.6	Green	Anode
LDQ-SMA3004RI-TR	635	2500	2.0	2.5	Red	Anode
LDQ-SMA3006RI-TR	660	8000	1.7	2.2	Red	Anode
LDQ-SMA3002RISUGTR	574	7000	2.2	2.6	Green	Anode
LDQ-SMA3004RI-SITR	636	15,000	2.0	2.6	Red	Anode
LDQ-SMA3007RIUSBTR	470	6000	3.5	4.0	Blue	Anode
LDQ-SMC3002RI-TR	565	2500	2.2	2.6	Green	Cathode
LDQ-SMC3004RI-TR	635	2500	2.0	2.5	Red	Cathode
LDQ-SMC3006RI-TR	660	8000	1.7	2.2	Red	Cathode
LDQ-SMC3002RISUGTR	574	7000	2.2	2.6	Green	Cathode
LDQ-SMC3004RI-SITR	636	15,000	2.0	2.6	Red	Cathode
LDQ-SMC3007RIUSBTR	470	6000	3.5	4.0	Blue	Cathode



USA/Canada 1-800-278-5666
Asia +886-3-5821124



www.lumex.com



USA/Canada 1-847-359-8904
Asia +886-3-5821154