


ACTIVE PORT	CONNECTED GROUND	DC POWER
A	YES	OFF
B	YES	ON



SPECIFICATIONS

FREQUENCY RANGE: DC TO 1,000 MHz
 VSWR: 1.60:1 MAXIMUM
 INSERTION LOSS: .70 dB
 ISOLATION: 50 dB MINIMUM
 NOMINAL IMPEDANCE: 75 OHMS
 POWER HANDLING CAPACITY: 5 WATTS CW, COMMON TO SWITCHED PORTS
 (SWITCHED PORTS TERMINATED),
 1/2 WATT SWITCHED PORTS TO COMMON
 SWITCHING TIME: 15 MILLISECONDS
 OPERATING VOLTAGE: +12 VDC AT 45mA MAXIMUM
 OPERATING TEMPERATURE RANGE: -20°C TO +60°C

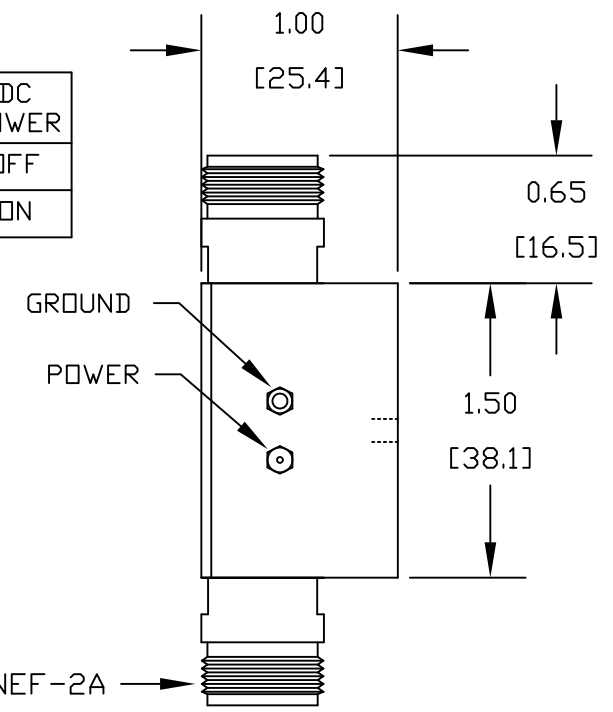

PASTERNAK ENTERPRISES, INC.
 P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

DWG TITLE PE7103		DES. "75 OHM N" FEMALE A/B COAXIAL SWITCH, FREQUENCY RANGE: DC TO 1,000 MHz			
REV. C	FSCM NO. 53919	CAD FILE 120310	SCALE N/A	SIZE A	127

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES (mm).