

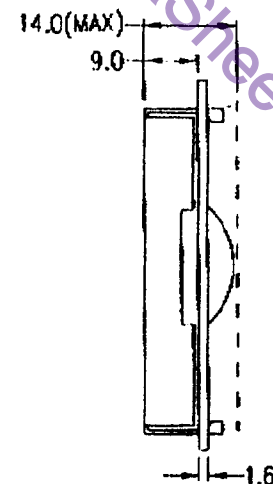


液晶之友 电话: 020-33819057
<http://www.lcdfriends.com>



www.DataSheet4U.com

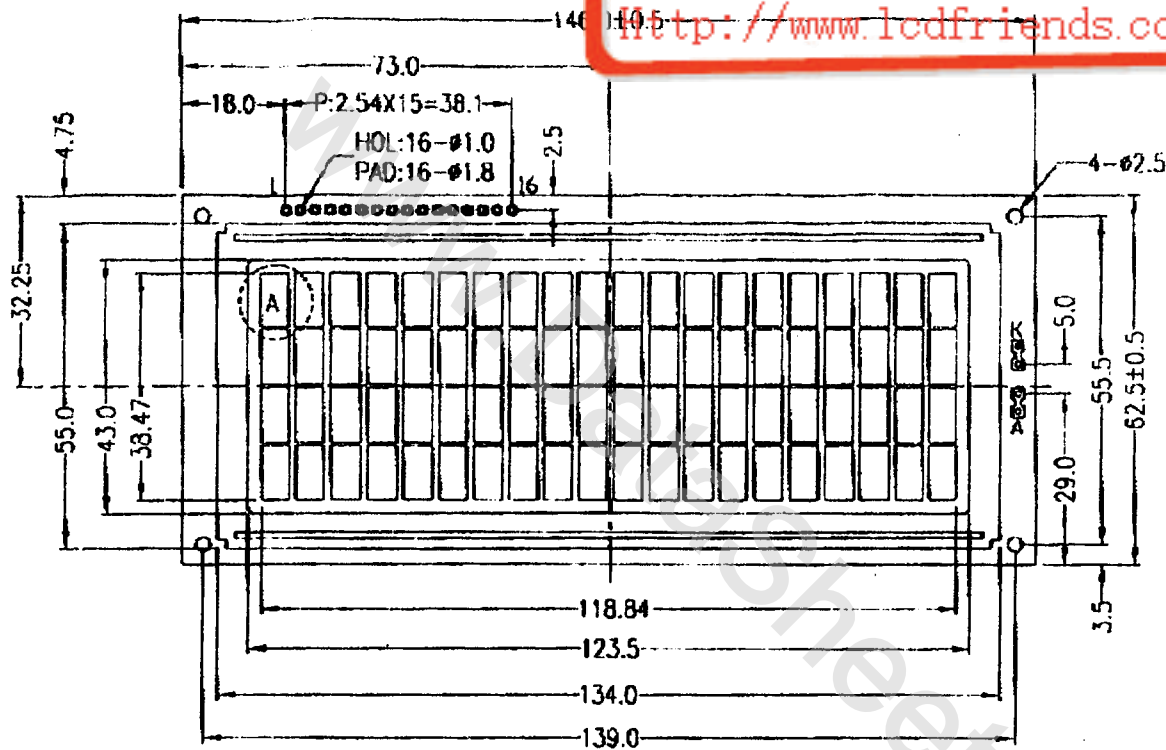

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K



- NOTES:
- 1.DISPLAY TYPE: STN/YELLOW GREEN MODE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 - 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 - 5.LCD OPERATING VOLTAGE: 4.6V
 - 6.OPERATING TEMP: -20°C~+70°C
 - 7.STORAGE TEMP: -30°C~+80°C
 - 8.CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
 - 9.BACKLIGHT: LED
 - 10.BEZEL IS TO BE PAINTED BLACK
 - 11.UNMARKED TOLERANCES: ±0.3mm

		TIAN-MA MICROELECTRONICS CO.	
6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China			
DRAWN BY: 李松	TITLE: TM204KBCW6		
CHECKED BY: 李松	DWG NO: G-1		
APPROVED BY: 李松	DWG NAME: TM204KBCW6-1	SCALE:	UNIT: mm
CONFIRMED BY: 李松	SHEET NO: 01		