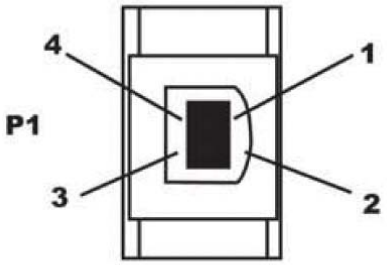

USB B Female



USB A Female

PIN Out

(P1)		(P2)
1	———	1
2	———	2
3	———	3
4	———	4
Shell	———	Shell

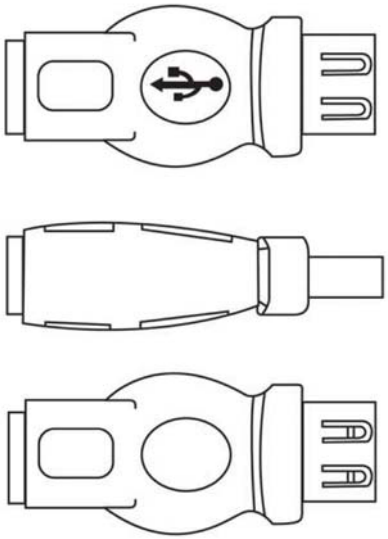

Material:

- Jump Wire: Non-UL 26AWG(7/0.16) Tinned Copper
- Connector:
  - P1: USB B Female Gold Flash Contact, Nickel Plated Shell
  - P2: USB A Female Gold Flash Contact, Nickel Plated Shell
  - Plastic: White
- Hood: Molded Type PVC 45 P
- Color: Beige

Electrical:

- 100% Open, short & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	10.19.11	Chappell
Approved		

ASSMANN WSW components

Item No. A-USB-1-R

Title USB B Female <=> USB A Female Adapter

Drawing No.

rev00

Replace

Sheet