

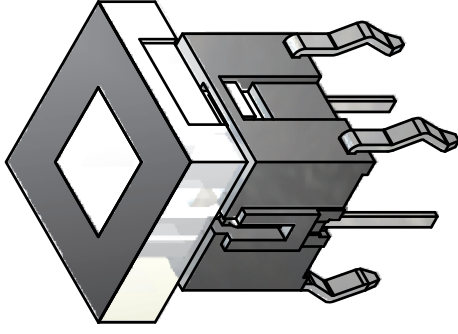
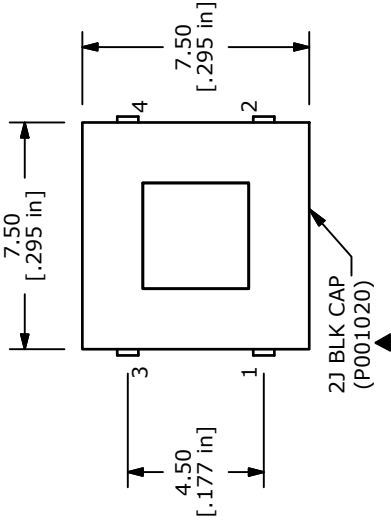



P.C.B. LAYOUT

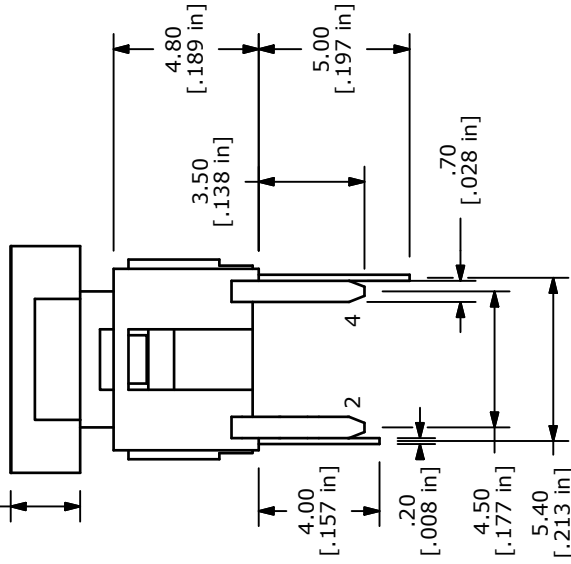

2.30  
[.091 in]

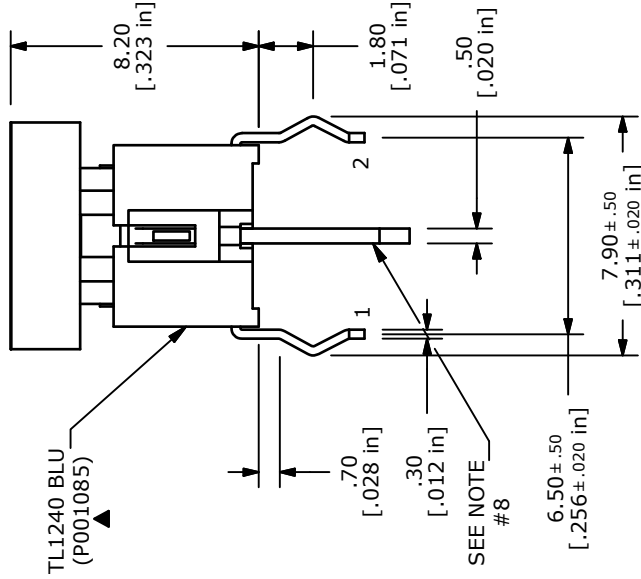

CIRCUIT: SPST

- NOTES:
- ALL DIMENSIONS IN MM
  - GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  - RATING: 50mA @ 12VDC
  - TRAVEL: 0.25 +0.2/0.1mm
  - OPERATING FORCE: 160±50gf
  - CONTACT RESISTANCE: 100 Milli-Ohms Max
  - 2002/95/EC (ROHS) COMPLIANT
  - SHORTER LEAD (WITH COLOR) IS NEGATIVE (CATHODE).
  - LED: BLUE
  - ▲ DENOTES CRITICAL PARAMETER

LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.2-4.0
LUMINOUS INTENSITY	MCD	500



TITLE TL1240BQ2JBLK

B	19550	DRAWING UPDATE / CLEAN-UP	12/28/10	BGL
A	19409	RELEASED FOR PRODUCTION	11/04/10	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	4:1	DATE	11/4/2010	DR	BMA	DWG	XP0314P	REV	B
-------	-----	------	-----------	----	-----	-----	---------	-----	---