



1. Dimensions:

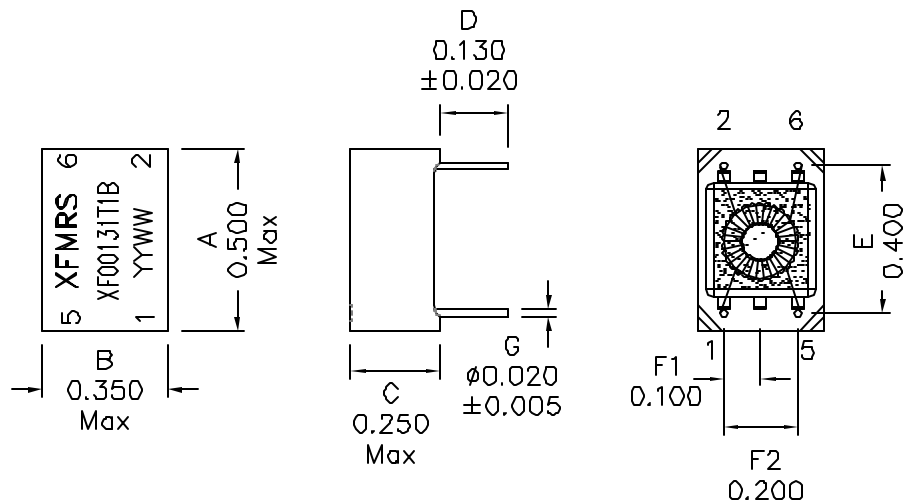

2. Schematic:



3. Electrical Specifications: @25°C

- OCL: Pins 1-2 1.2mH Minimum @100KHz 50mV
- Leakage L: Pins 1-2 0.50uH Max @100KHz 50mV (short 5-6)
- Cw/w: 25pF Maximum @100KHz 50mV
- DCR: Pins 1-2 0.70 ohms Max
Pins 5-6 0.70 Ohms Max
- Turns Ratio: 1:1 ±2%
- Isolation Voltage: 1500Vrms

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208B for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from 0°C to +70°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component
10. Pin 3 & 4 are removed.

DOC. REV. A/4

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: T1/CEPT/ISDN-PRI TRANSFORMERS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch SCALE 2:1 SHT 1 OF 1	P/N: XF00131T1B		REV. A
	DWN.	Xian yi	Nov-07-09
	CHK.	YK Liao	Nov-07-09
	APP.	Joe Huff	Nov-07-09