


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/3/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

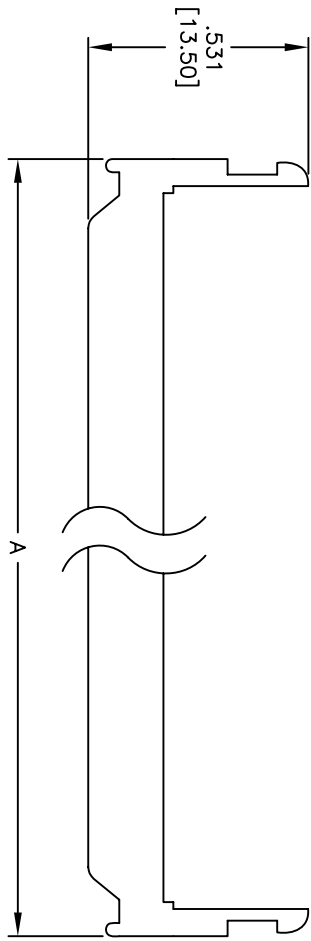

POSITIONS	A [IN]	A [MM]
6	.480	12.18
8	.580	14.72
10	.680	17.26
12	.780	19.80
14	.880	22.34
16	.980	24.88
20	1.180	29.96
24	1.380	35.04
26	1.480	37.58
30	1.680	42.66
34	1.880	47.74
36	1.980	50.28
40	2.180	55.36
44	2.380	60.44
50	2.680	68.06
56	2.980	75.68
60	3.180	80.76
62	3.280	83.30
64	3.380	85.84

**SPECIFICATIONS:**  
 Material: Insulator: PBT, glass reinforced,  
 rated UL 94V-0  
**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	6/3/05
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		SIZE	PART NO.	REV.
STRAIN RELIEF FOR FCS SERIES		X	FSR-XX	
REF:	SCALE: NTS	SHEET 1 OF 1		