



RLTMGL-523.5 / 1~100 mW

LD PUMPED ALL-SOLID-STATE GREEN LASER AT 523.5nm

All solid state laser at 523.5nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in scientific experiment, optical sensor, measurement, instrument, communication, spectrum analysis, etc.



SPECIFICATIONS



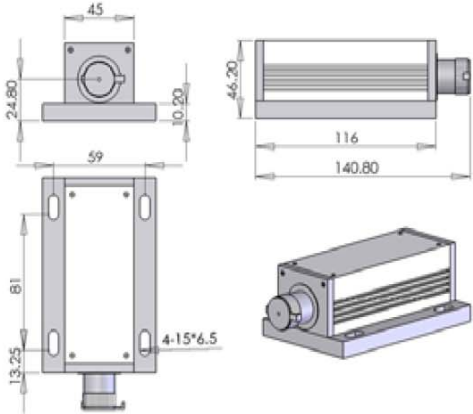
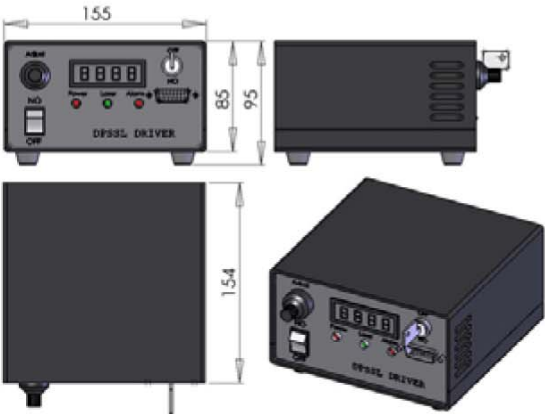

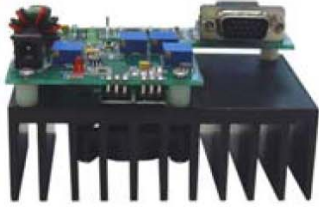
Wavelength (nm)	523.5 ± 1		
Output power (mW)	>1, 5, 10, 20, ... , 100		
Transverse mode	Near TEM ₀₀		
Operating mode	CW		
Power stability (rms, over 4 hours)	<5%, <10%		
Warm-up time (minutes)	<10		
M ² factor	<1.2		
Beam divergence, full angle (mrad)	<1.5		
Beam diameter at the aperture (mm)	~2.0		
Beam height from base plate (mm)	24.8		
Polarization ratio	>100:1 (0 or 90 degree)		
Pointing stability after warm-up (mrad)	<0.05		
Operating temperature (°C)	10~35		
Power supply (90-264VAC or 5VDC)	PSU-LED	PSU-FDA	PSU-OEM
Expected lifetime (hours)	10000		
Warranty	1 year		



ROITHNER LASERTECHNIK

Wiedner Hauptstraße 76, A-1040 Vienna, Austria
 Tel.: ++43 1 586 52 43-0, Fax -44, office@roithner-laser.com



MxL-523.5	PSU-LED
 <p data-bbox="276 770 679 801">140. 8(L)×73(W) ×46. 2(H) mm³, 0.6kg</p>	 <p data-bbox="911 770 1294 801">154 (L) ×155(W) ×95 (H) mm³, 1.5kg</p>
	
PSU-FDA	PSU-OEM
 <p data-bbox="272 1644 644 1675">133 (L) ×130(W) ×65 (H) mm³, 1.2kg</p>	 <p data-bbox="911 1644 1273 1675">100 (L) ×60(W) ×56 (H) mm³, 0.2kg</p>
