


GSD

1205-65-5

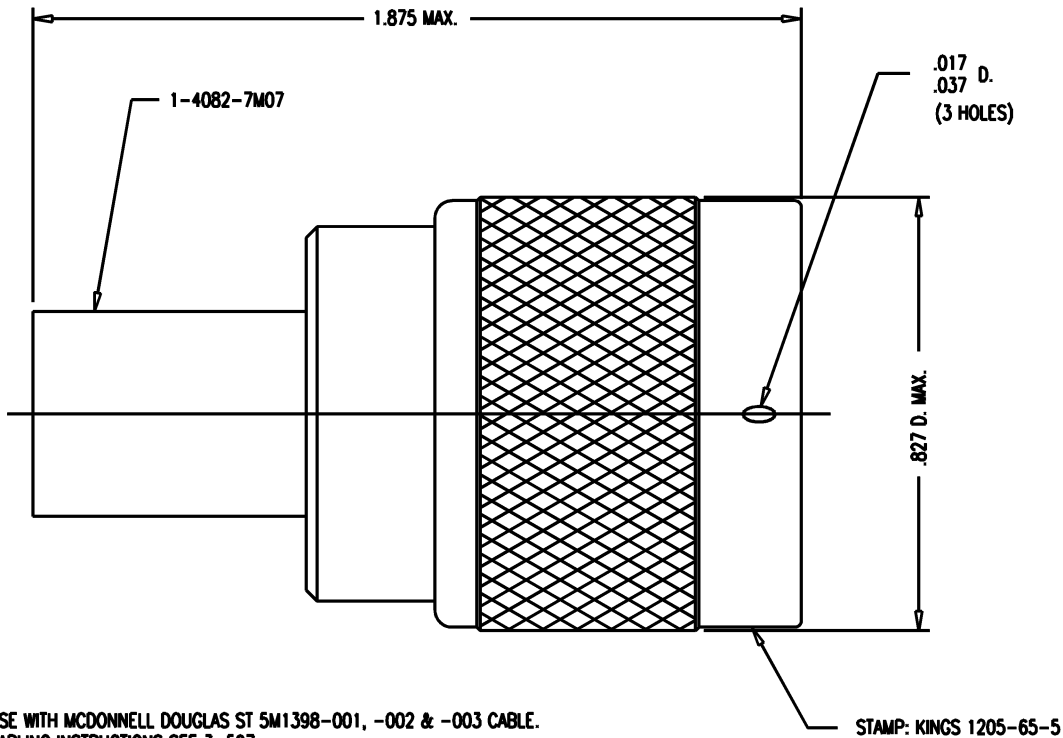

- NOTES:**
1. FOR USE WITH MCDONNELL DOUGLAS ST 5M1398-001, -002 & -003 CABLE.
 2. FOR CABLING INSTRUCTIONS SEE 3-597.
 3. FOR CABLE TIMMING USE KTJ-188, KTD-230 & KTF-5.
 4. FOR CRIMPING USE DIE KTH-2005.
 5. INTERFACE PER MIL-STD-348, FIG. 304-1.
 6. CENTER CONTACT (1-547-26M9D) SUPPLIED UNASSEMBLED.
 7. MARK PACKAGE: KINGS 1205-65-5
MDAE 5M1983-001
 8. MATERIALS:
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-140
GASKET-SILICONE RUBBER, ZZ-R-765
C-RING-PHOS. BRONZE, ASTM-B-135
INSULATOR-TEFLON, ASTM-D-4894
OUTER CONTACT-BER. COP., ASTM-B-196
ALL OTHER METAL PARTS-BRASS, ASTM-B16
 9. FINISHES:
CENTER CONTACT-GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
 10. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-1000 VRMS

REVISIONS	
ISSUE	CHANGES
0	ER 35587 KH 02/16/95

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF: MC AIR 5M1983-001 REV. A	
PLUG, N	
DRAWN KH	02/16/95
DESIGN LI	02/17/95
APPR.	DATE
KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	

1205-65-5

GSD