

DIGITRON SEMICONDUCTORS

MBR5025L

40A SCHOTTKY RECTIFIER

MAXIMUM RATINGS

Rating	Symbol	MBR5025L	Unit
Peak repetitive reverse voltage	V_{RRM}		
Working peak reverse voltage	V_{RWM}	25	V
DC blocking voltage	V_R		
Average rectified forward current (Rated V_R)	$I_{F(AV)}$	50 @ $T_C = 125^\circ C$	A
Peak repetitive forward current (Rated V_R , square wave, 20 kHz)	I_{FRM}	150 @ $T_C = 90^\circ C$	A
Peak repetitive reverse surge current (2.0μs, 1.0 kHz)	I_{RRM}	2	A
Non-repetitive peak surge current (surge applied at rated load conditions, halfwave, single phase, 60Hz)	I_{FSM}	300	A
Operating junction temperature range	T_J	-65 to +150	°C
Storage junction temperature range	T_{stg}	-65 to +175	°C
Peak surge junction temperature (forward current applied)	$T_{J(pk)}$	175	°C
Voltage rate of change	dv/dt	10000	V/μs
Maximum thermal resistance			°C/W
Junction to case	$R_{θJC}$	0.75	


ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ C$ unless otherwise noted)

Parameter	Symbol	MBR5025L	Unit
Maximum instantaneous forward voltage ⁽¹⁾ ($I_F = 50A$, $T_C = 25^\circ C$) ($I_F = 50A$, $T_C = 125^\circ C$) ($I_F = 30A$, $T_C = 25^\circ C$)	V_F	0.62 0.58 0.54	V
Maximum instantaneous reverse current ⁽¹⁾ (Rated dc voltage, $T_C = 25^\circ C$) (Rated dc voltage, $T_C = 100^\circ C$)	I_R	0.5 60	mA

Note 1: Pulse test: Pulse width = 300μs, duty cycle ≤ 2.0%.

MECHANICAL CHARACTERISTICS

Case	TO-218AC
Marking	Alpha-numeric
Pin out	See below

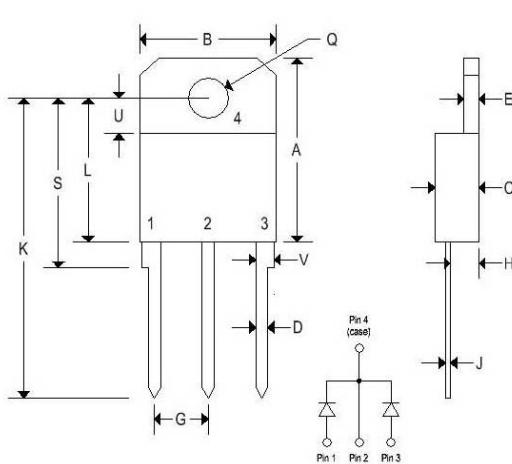

	TO-218AC			
	Inches		Millimeters	
	Min	Max	Min	Max
A	0.749	0.771	19.000	19.600
B	0.551	0.570	14.000	14.500
C	0.165	0.185	4.200	4.700
D	0.040	0.051	1.000	1.300
E	0.058	0.064	1.450	1.650
G	0.206	0.225	5.210	5.720
H	0.103	0.118	2.600	3.000
J	0.016	0.023	0.400	0.600
K	1.123	1.259	28.500	32.000
L	0.579	0.602	14.700	15.300
Q	0.158	0.167	4.000	4.250
S	0.689	0.712	17.500	18.100
U	0.134	0.149	3.400	3.800
V	0.060	0.078	1.500	2.000

DIGITRON SEMICONDUCTORS

MBR5025L

40A SCHOTTKY RECTIFIER

Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).

Available as "HR" (high reliability) screened per MIL-PRF-19500, JAN-TX level. Add "HR" suffix to base part number.

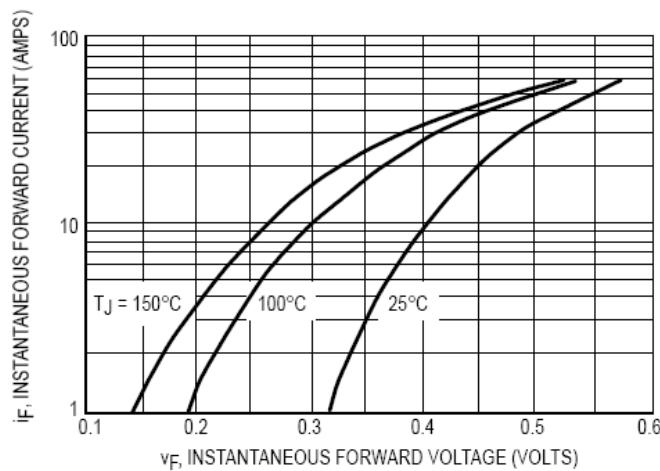


Figure 1. Typical Forward Voltage

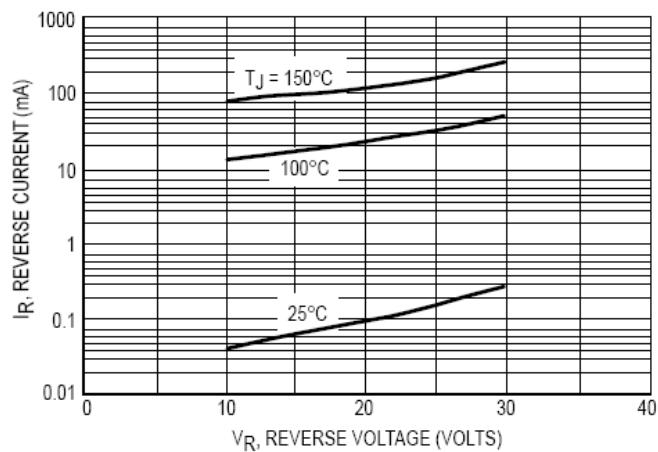


Figure 2. Typical Reverse Current

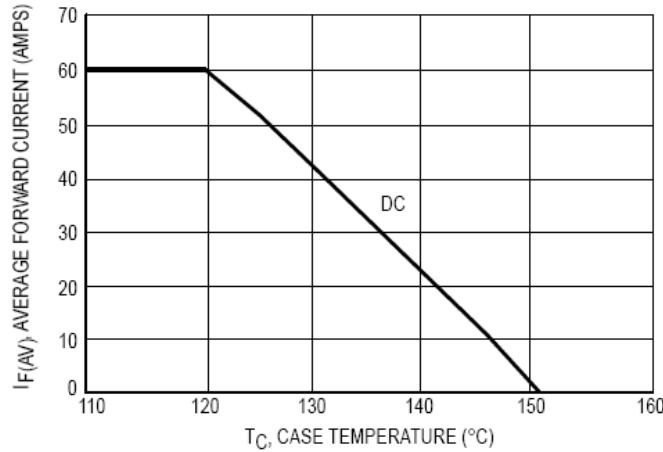


Figure 3. Current Derating, Case

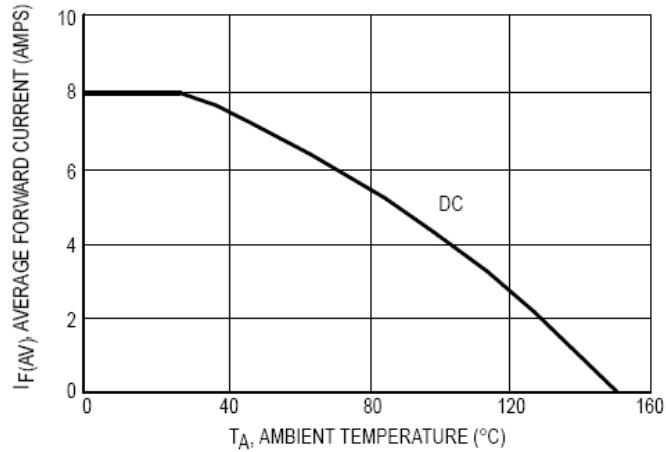


Figure 4. Current Derating, Ambient