


## Z4DGP406L-HF Thru. Z4DGP410L-HF

Reverse Voltage: 600 to 1000 Volts

Forward Current: 4.0 A

RoHS Device

Halogen free




### Features


- Internal structure with GPRC (Glass passivated rectifier chip) inside.
- Lead less chip form, no lead damage.
- Low power loss, High efficiency.
- High current capability.
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 .

### Mechanical data

- Case: Packed with FRP substrate and epoxy underfilled.
- Terminals: Pure Tin plated (Lead-Free), solderable per MIL-STD-750, method 2026.
- Polarity: Laser marking symbols
- Weight: 0.29 grams (approx).

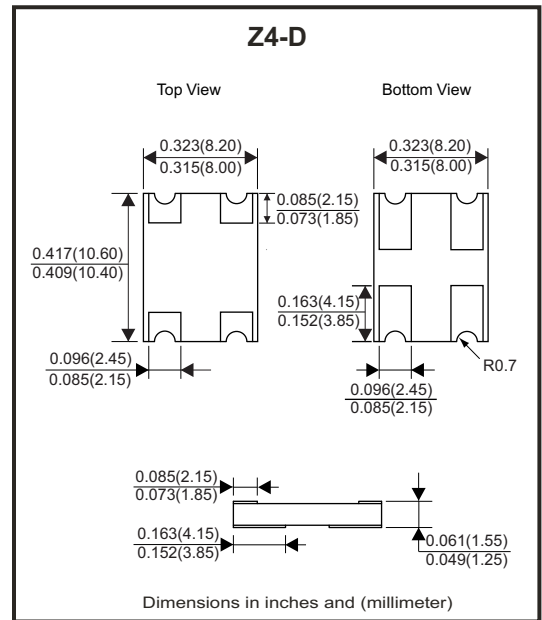

### Circuit Diagram



### Absolute Maximum Rating (at TA=25°C unless otherwise noted)

| Parameter  | Symbol            | Z4DGP406L-HF | Z4DGP408L-HF | Z4DGP410L-HF | Unit |
|--|-------------------|--------------|--------------|--------------|------|
| Repetitive Peak Reverse Voltage  | V <sub>RRM</sub>  | 600          | 800          | 1000         | V    |
| Average Forward Current  | I <sub>(AV)</sub> | 4.0          |              |              | A    |
| Peak Forward Surge Current, 8.3ms single half sine-wave, superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>  | 150          |              |              | A    |
| Operating Temperature Range  | T <sub>J</sub>    | -55 to +175  |              |              | °C   |
| Storage Temperature Range  | T <sub>STG</sub>  | -55 to +175  |              |              | °C   |

### Electrical Characteristics (at TA=25°C unless otherwise noted)

| Parameter                       | Symbol              | Conditions                                      | Min. | Typ.         | Max.         | Unit             |
|---------------------------------|---------------------|---|------|--------------|--------------|------------------|
| Forward Voltage                 | V <sub>F</sub>      | IF = 2.0A<br>IF = 4.0A                          | -    | 0.86<br>0.90 | 0.90<br>0.95 | V                |
| Repetitive peak reverse current | I <sub>RRM</sub>    | V <sub>R</sub> =Max. V <sub>RRM</sub> , Ta=25°C | -    | 0.08         | 5            | uA               |
| Current squared time            | I <sup>2</sup> t    | t<8.3ms, Ta = 25°C                              | -    | 93.38        | -            | A <sup>2</sup> S |
| Junction capacitance            | C <sub>J</sub>      | V <sub>R</sub> =4V, f=1.0MHz                    | -    | 45           | -            | pF               |
| Thermal resistance              | R <sub>th(JA)</sub> | Junction to ambient (Note)                      | -    | 35           | -            | °C/W             |
|                                 | R <sub>th(JL)</sub> | Junction to lead (Note)                         | -    | 15           | -            | °C/W             |

Notes: 1. Thermal resistance, junction to ambient, measured on PC board with 5.0\*5.0mm(0.03mm thick) land areas.

Company reserves the right to improve product design, functions and reliability without notice.

## RATING AND CHARACTERISTIC CURVES (Z4DGP406L-HF Thru. Z4DGP410L-HF)

Fig.1- Forward Current Derating Curve

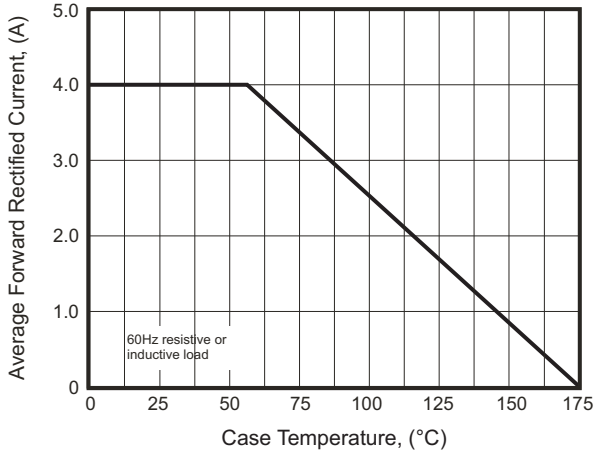


Fig.2- Maximum Non-Repetitive Peak Forward Surge Current

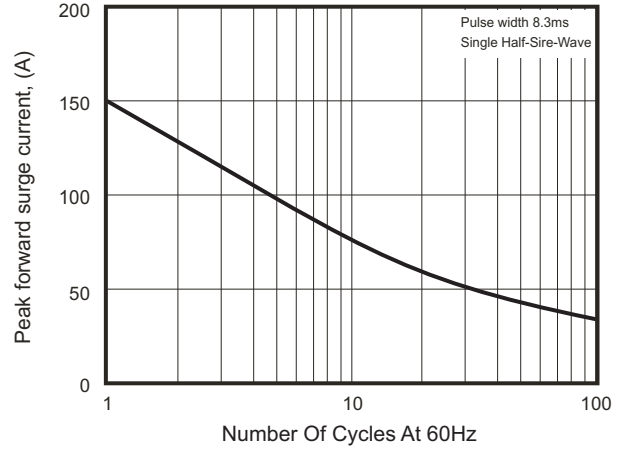


Fig.3- Typical Instantaneous Forward Characteristics

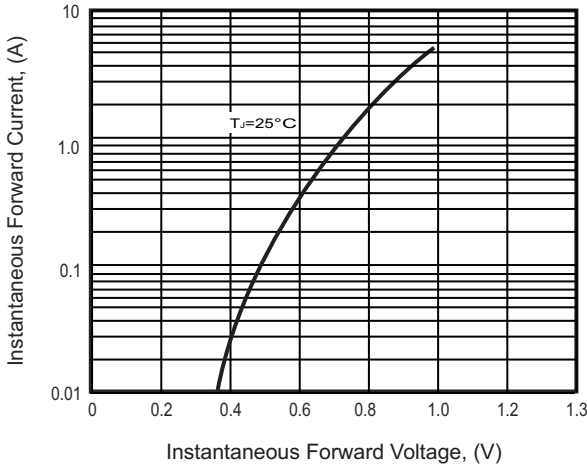


Fig.4- Typical Reverse Characteristics



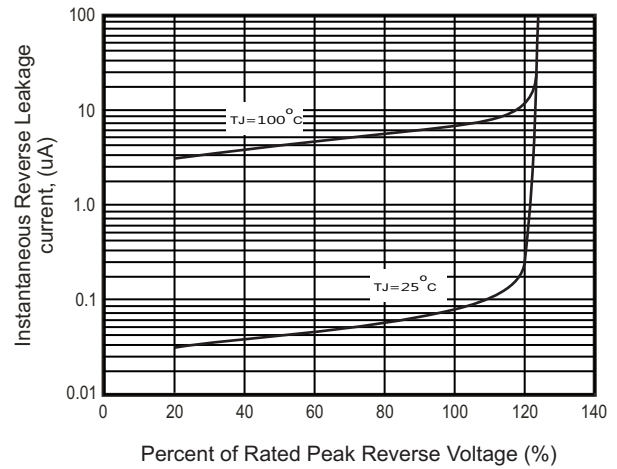


Fig.5 - Typical Junction Capacitance

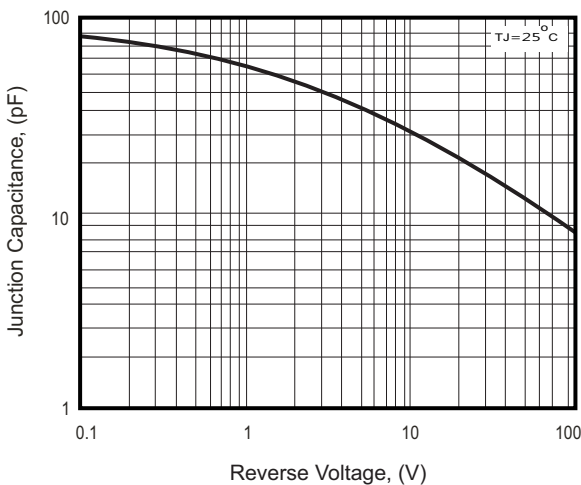

Company reserves the right to improve product design, functions and reliability without notice.

## Reel Taping Specification

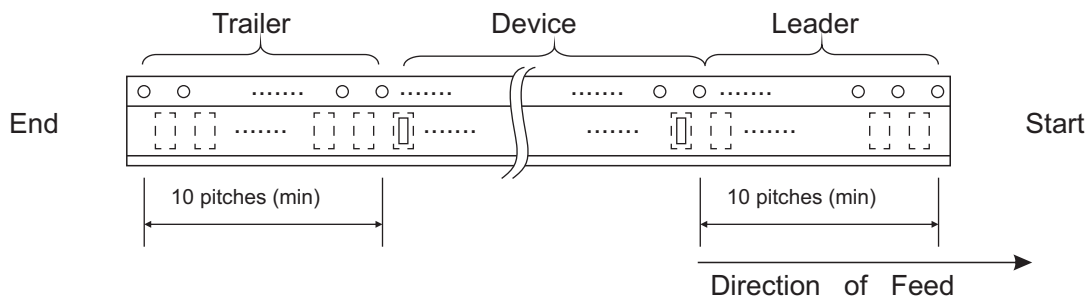


| Z4-D | SYMBOL | A             | B             | C             | d             | D              | D <sub>1</sub> | D <sub>2</sub> |
|------|--------|---------------|---------------|---------------|---------------|----------------|----------------|----------------|
|      | (mm)   | 8.25 ± 0.10   | 10.65 ± 0.10  | 1.60 ± 0.10   | 1.55 ± 0.05   | 330 ± 2.00     | 50.0 MIN.      | 13.0 ± 0.50    |
|      | (inch) | 0.325 ± 0.004 | 0.419 ± 0.004 | 0.063 ± 0.004 | 0.061 ± 0.002 | 12.992 ± 0.079 | 1.969 MIN.     | 0.512 ± 0.020  |

| Z4-D | SYMBOL | E             | F             | P             | P <sub>0</sub> | P <sub>1</sub> | W             | W <sub>1</sub> |
|------|--------|---------------|---------------|---------------|----------------|----------------|---------------|----------------|
|      | (mm)   | 1.75 ± 0.10   | 7.50 ± 0.10   | 8.00 ± 0.10   | 4.00 ± 0.10    | 2.00 ± 0.10    | 16.00 ± 0.30  | 14.4 MAX.      |
|      | (inch) | 0.069 ± 0.004 | 0.295 ± 0.004 | 0.315 ± 0.004 | 0.157 ± 0.004  | 0.079 ± 0.004  | 0.630 ± 0.012 | 0.567 MAX.     |

Company reserves the right to improve product design, functions and reliability without notice.

## Marking Code

| Part Number  | Marking Code |
|--------------|--------------|
| Z4DGP406L-HF | Z4GP40JL     |
| Z4DGP408L-HF | Z4GP40KL     |
| Z4DGP410L-HF | Z4GP40ML     |




Z4GP = Series code  
 40 = Amps class(4.0A)  
 J = Voltage Class  
 J = 600V  
 K = 800V  
 M = 1000V  
 L = Low VF  
 . = Halogen- free type

Y = Last digit of the year  
 0 = 2010  
 1 = 2011  
 2 = 2012

WW = Mfg week  
 01 = First week  
 02 = Second week  
 03 = Third week

## Suggested PAD Layout

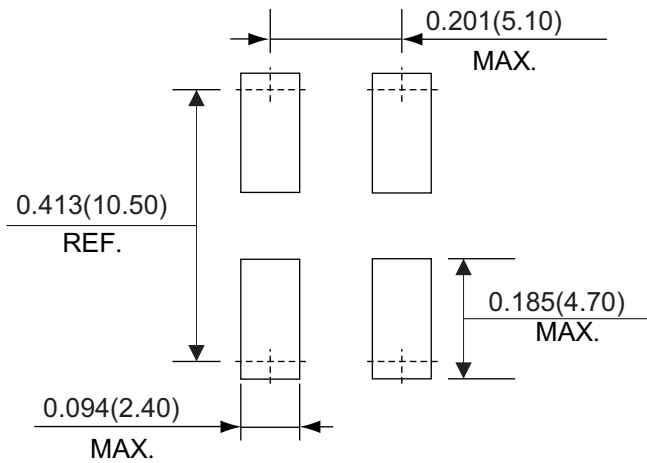

## Standard Packaging

| Case Type | REEL PACK    |                  |
|-----------|--------------|------------------|
|           | REEL ( pcs ) | Reel Size (inch) |
| Z4-D      | 3,000        | 13               |

Company reserves the right to improve product design , functions and reliability without notice.