
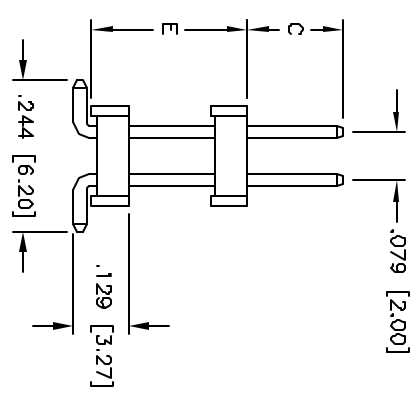
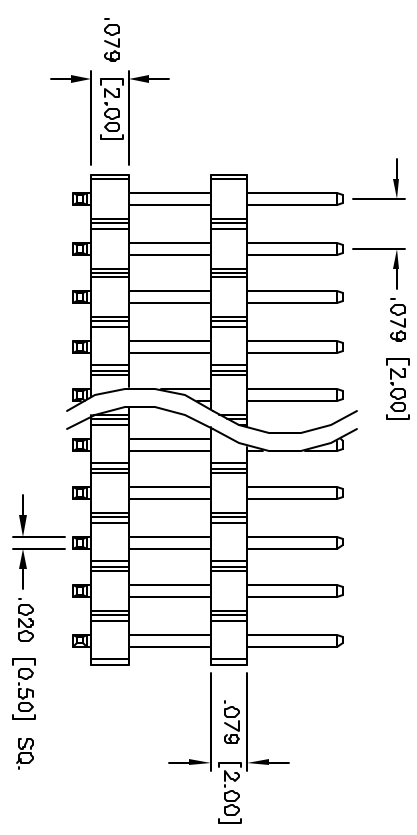
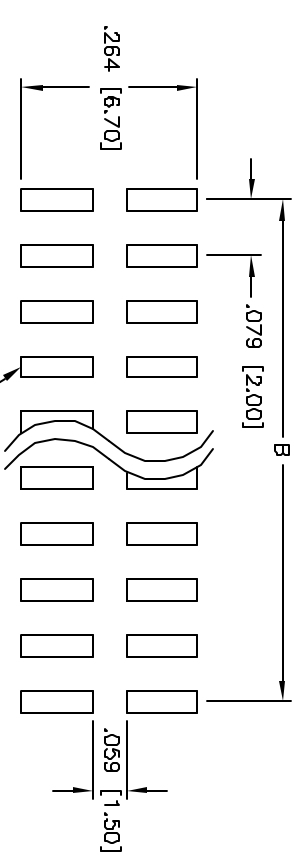


APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

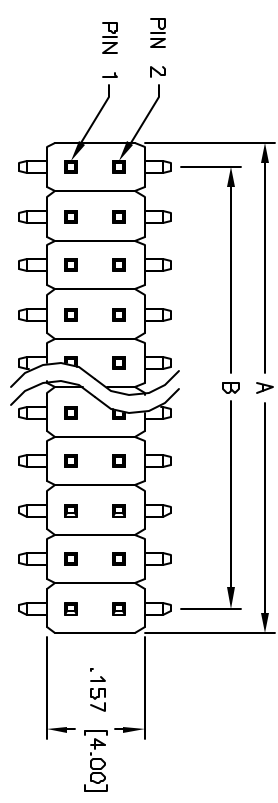

Positions: 2 thru 80  
 A = .079 [2.00] x No. of Positions  
 B = .079 [2.00] x No. of Spaces

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 6T, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 5,000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -55°C to +105°C

Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 260°C for 5 seconds



Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/05	

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE NICHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES: ±.10      ØX ±.10  
 XX ±.020      ØXX ±.019  
 .XXX ±.015      ØXXX ±.010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.079 [2.00] DUAL ROW PIN HEADER**  
**DUAL INSULATOR, SURFACE MOUNT**

DRAWN	SS	DATE	4/1/05
CHECKED			
APPROVED			

SIZE	PART NO.	SCALE	SHEET	OF
X	D2PH-2-XX-U-C/SMT/E	MIB	1	1