


RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT

| SWITCH FUNCTION | | |
|-----------------|--------|--------|
| PDS. 1 | PDS. 2 | PDS. 3 |
| <DN> | OFF | <DN> |
| 2-3 | OPEN | 2-1 |

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NDS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C

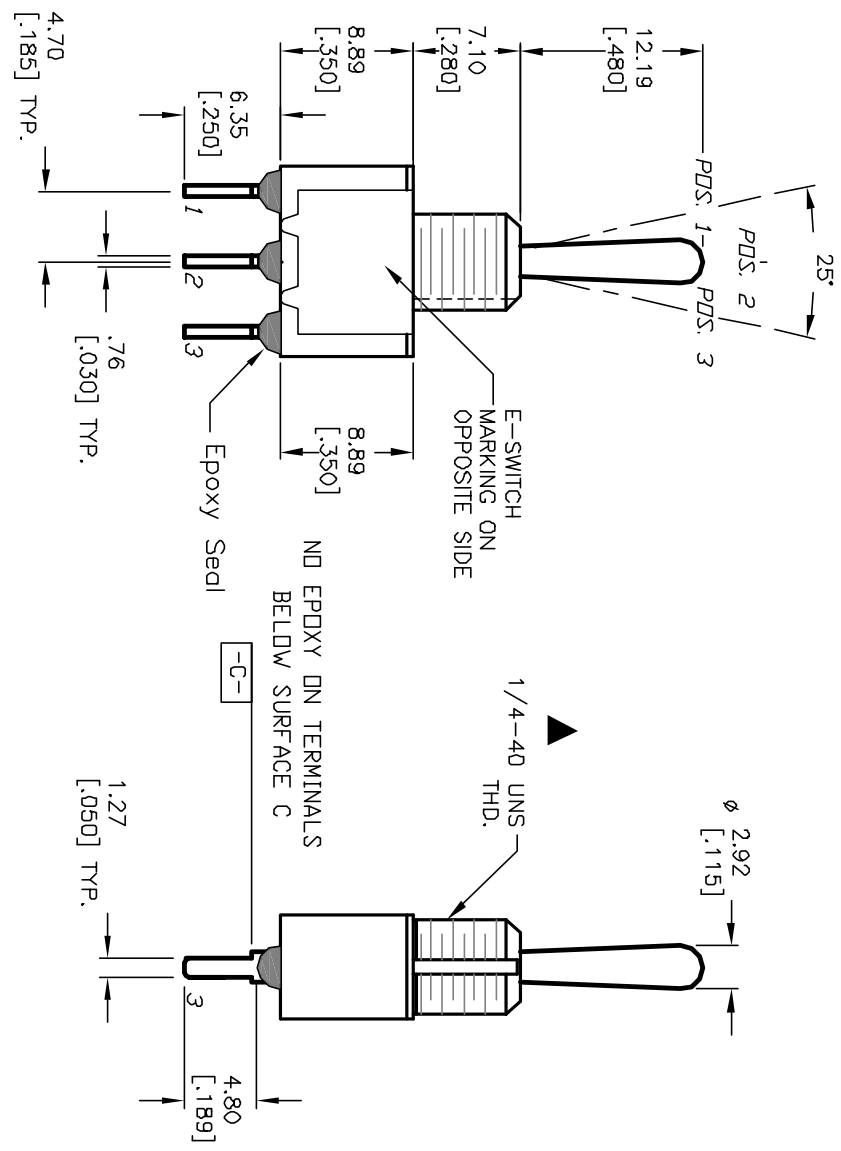

| | | | | |
|------|---------|-------------|--------|-------|
| REV. | ECN No. | DESCRIPTION | DATE | CHK'D |
| A | 12280 | RELEASED | 7/1/02 | CJB |

| | | | | | |
|-----------------------|-------|------|----|---------|-----|
| TITLE | SCALE | DATE | DR | DWG | REV |
| 100 SP-4 T1 B3 M2 Q E | 2:1 | -- | -- | T114003 | A |



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PREPARED FOR E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED