

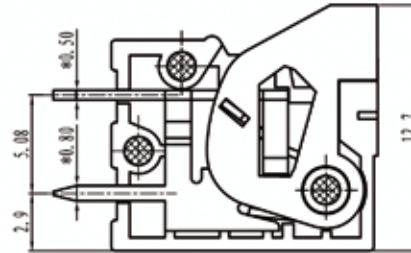



# euro-block

product specification



SECTION A-A

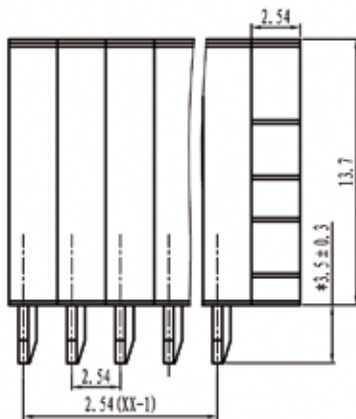

## Electrical

Standard: UL-IEC  
 Rated voltage: 150V-130V  
 Rated current: 2A-6A  
 Wire range: 26-20AWG-0.5mm<sup>2</sup>  
 Withstanding voltage: AC2000V/1Min  
 Insulation resistance: 500M Ω/DC1000V

## Mechanical

Temp.Range: -40°C~+105°C  
 Strip length: 11mm  
 MAX soldering: +250°C, for 5 sec

## Dimensions

Pitch: 2.54mm  
 Poles: 1p-xxp

## Material

Housing: PA66, UL94V-0  
 Pin header: Brass, Tin plated  
 Wire guard: stainless steel (SUS301)

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension				fillet	chamfer	short angle sid			≡	-	□	//	⊥		
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	all	over 6 to 6	to 10	over 10 to 50	over 50 to 120	all	to 5	over 5 to 30	over 30 to 120	over 120 to 120		
tolerance	±0.1	±0.2	±0.3	±0.5	±0.2	±0.5	±1	1°	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

UNITS	mm	SIZE	A4	SCALE	FIRST ANGLE PROJECTION	
<b>euro-block</b>						
					NAME	<b>MRM2-V</b>