

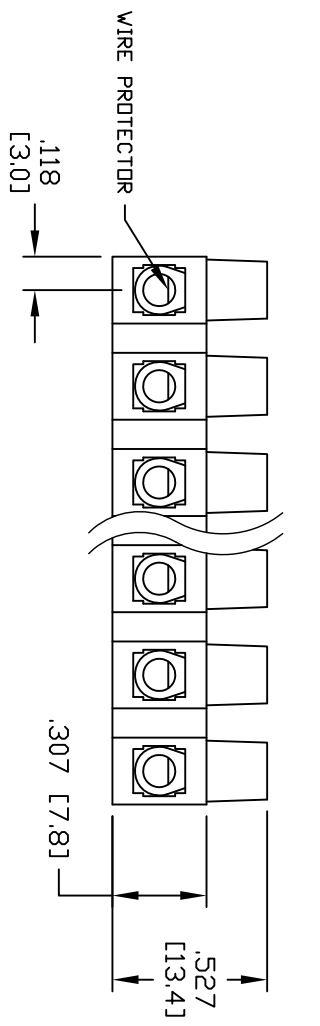


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/18/05	

APPROVED: _____
 DATE: _____ TITLE: _____

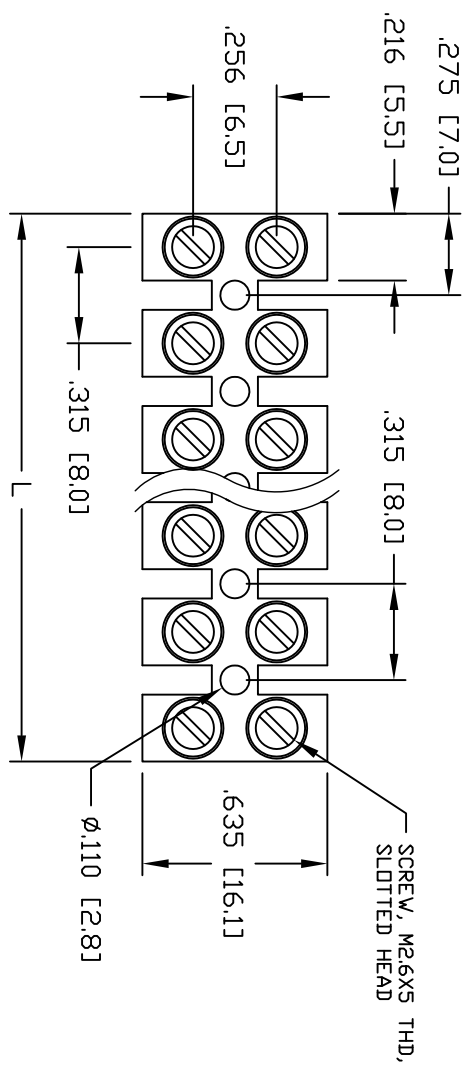

L = No. of Spaces x .315 [8.0] + .236 [6.0]

SPECIFICATIONS:

- Material: Insulator: Nylon 66 (Polyamide), rated UL 94V-2
- Insulator color: Off white
- Terminal: Copper Alloy, Nickel plated
- Wire protector: Steel
- Screw: Steel, Nickel plated
- Electrical: Operating voltage: 300 VAC max
- Current rating: 6 Amps max
- Mechanical: Recommended Screw Torque: 7.0 Lbf / inch
- Temperature Rating: Operating temperature: -65°C to +105°C
- Environmental: Lead free, RoHS Compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, DUAL ROW
 8.0mm PITCH

SIZE: X
 PART NO.: TDG-XX
 SCALE: NTS
 SHEET 1 OF 1