

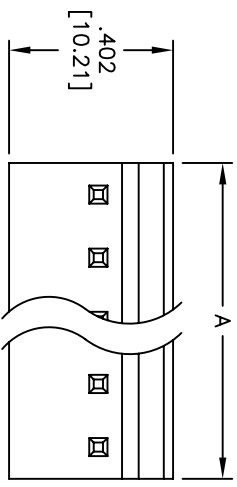
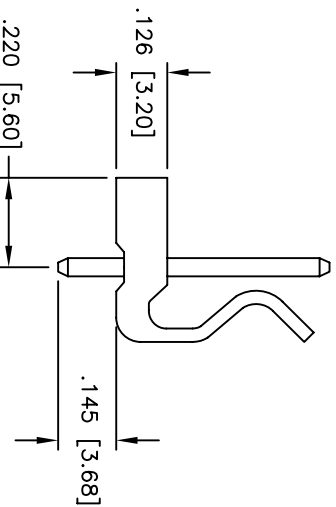


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

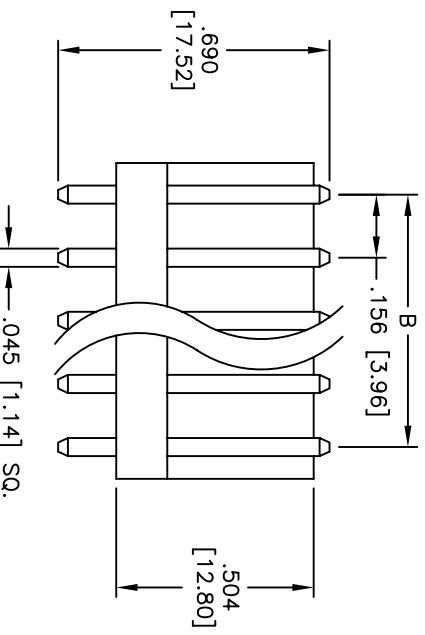

PCB LAYOUT

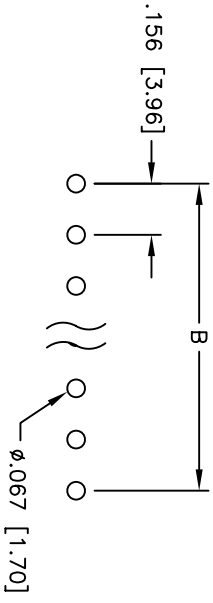

**SPECIFICATIONS:**

Material: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Contacts: Brass  
 Plating: Tin over Copper underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Contact resistance: 10 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 20  
 A = .156 [3.96] x No. of Positions + .012 [0.30]  
 B = .156 [3.96] x No. of Spaces

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**STRAIGHT, WITH LOCK POLARIZER**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE STRAIGHT, WITH LOCK POLARIZER	
.X ± .10 .XX ± .020 .XXX ± .015	INCHES	ØXX ± .10 ØXXX ± .015 ØXXXX ± .010	HOLES
APPROVALS	DATE	SIZE	PART NO.
DRAWN	SS	4/12/05	LHB-XX-SA1
CHECKED		X	
APPROVED		REF:	SCALE: NTS
			SHEET 1 OF 1