




## Ultrafast Plastic Rectifier

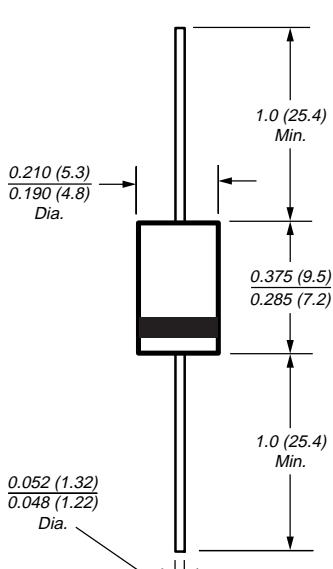

Dimensions in inches and (millimeters)

**Reverse Voltage** 50 to 200V  
**Forward Current** 4.0A

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching
- Soft recovery characteristics
- Glass passivated junction
- High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length,  
5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** JEDEC DO-201AD molded plastic body over passivated chip

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.045 oz., 1.2 g

## Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	UG4A	UG4B	UG4C	UG4D	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	150	200	V
Maximum RMS voltage	V <sub>RMS</sub>	35	70	105	140	V
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	150	200	V
Maximum average forward rectified current at 0.375" (9.5mm) lead length at T <sub>L</sub> = 75°C	I <sub>F(AV)</sub>	4.0				A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) at T <sub>L</sub> = 75°C	I <sub>FSM</sub>	150				A
Typical thermal resistance (NOTE 1)	R <sub>θJA</sub>	25				°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150°C				°C

## Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	Value	Units
Maximum instantaneous forward voltage at 4.0A (NOTE 2)	V <sub>F</sub>	0.95	V
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	5.0 300	μA
Maximum reverse recovery time at I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, I <sub>rr</sub> =0.25A	t <sub>rr</sub>	20	ns
Maximum reverse recovery time at I <sub>F</sub> =4.0A, dI/dt=50A/μs, V <sub>R</sub> =30V, I <sub>rr</sub> =10% I <sub>RM</sub>	t <sub>rr</sub>	30 50	ns
Maximum recovered stored charge I <sub>F</sub> =4.0A, dI/dt=50A/μs, V <sub>R</sub> =30V, I <sub>rr</sub> =10% I <sub>RM</sub>	Q <sub>rr</sub>	15 30	nC
Typical junction capacitance at 4V, 1MHz	C <sub>J</sub>	20	pF


**Notes:**

- (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length
- (2) Pulse test: 300μs pulse width, 1% duty cycle


## Ratings and Characteristic Curves

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig. 1 – Forward Current Derating Curves**

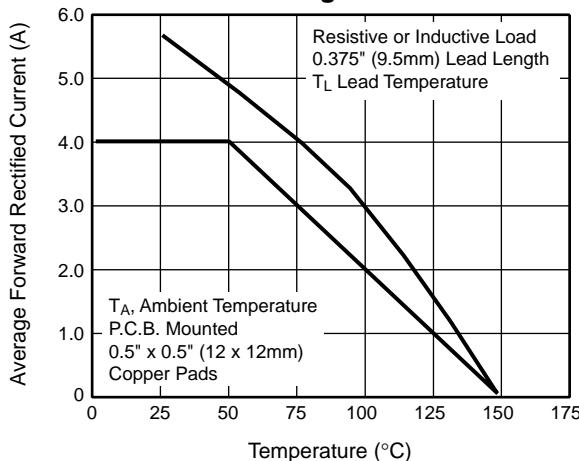


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

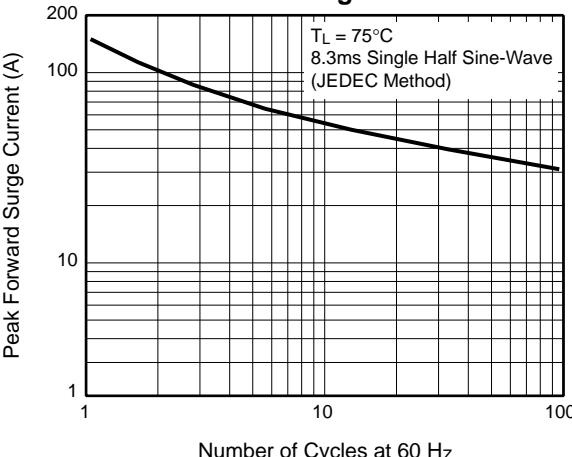


**Fig. 3 – Typical Instantaneous Forward Characteristics**

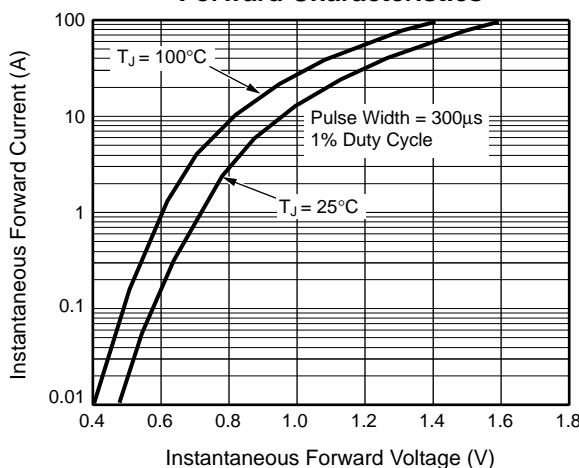

**Fig. 4 – Typical Reverse Leakage Characteristics**

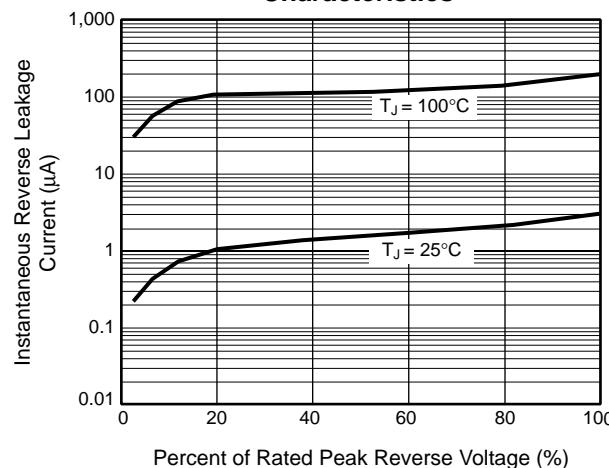

**Fig. 5 – Reverse Switching Characteristics**

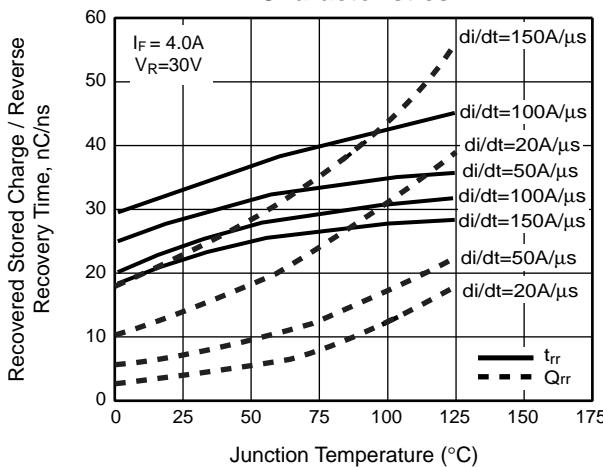

**Fig. 6 – Typical Junction Capacitance**

