

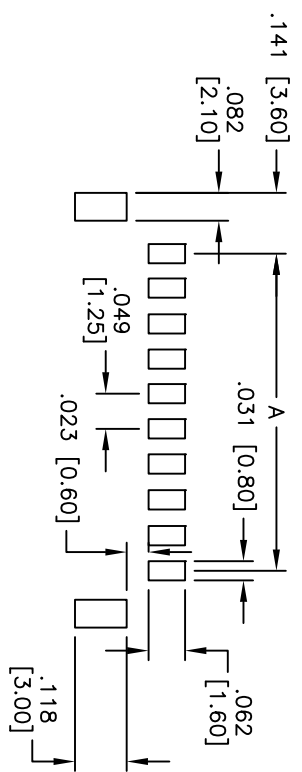
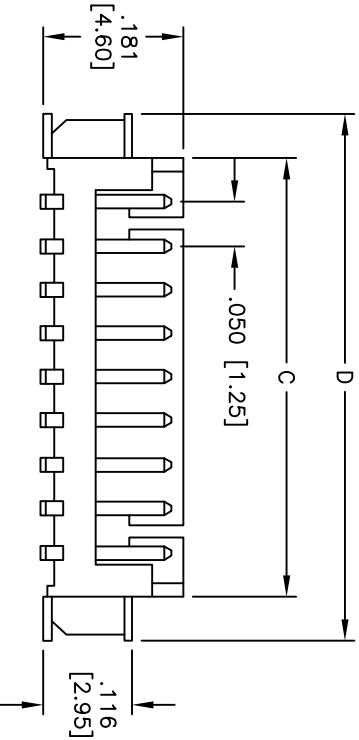


Rev	AWO #	Description	Date	Appr
-	7553	RELEASED	02/23/07	

APPROVED: _____
 DATE: _____ TITLE: _____

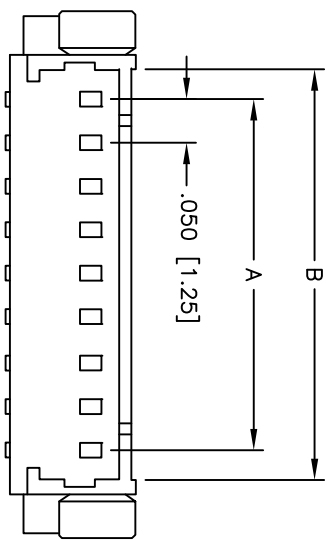

SPECIFICATIONS:
 Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass

Plating:
 Tin over Nickel underplate overall
Electrical:
 Operating voltage: 250 VAC max
 Current rating: 1 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

A=.049 [1.25] X No. of Spaces
 B=.049 [1.25] X No. of Spaces + .070 [1.80]
 C=.049 [1.25] X No. of Spaces +.118 [3.00]
 D=.049 [1.25] X No. of Spaces + .251 [6.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DRAWN	BW	02/23/07
CHECKED		
APPROVED		

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX 1.25mm WAFER SMT STRAIGHT

SIZE	PART NO.	REV.
X	125SH+A-XX-TS-SMT	-
REF:	SCALE: NTS	SHEET 1 OF 1