
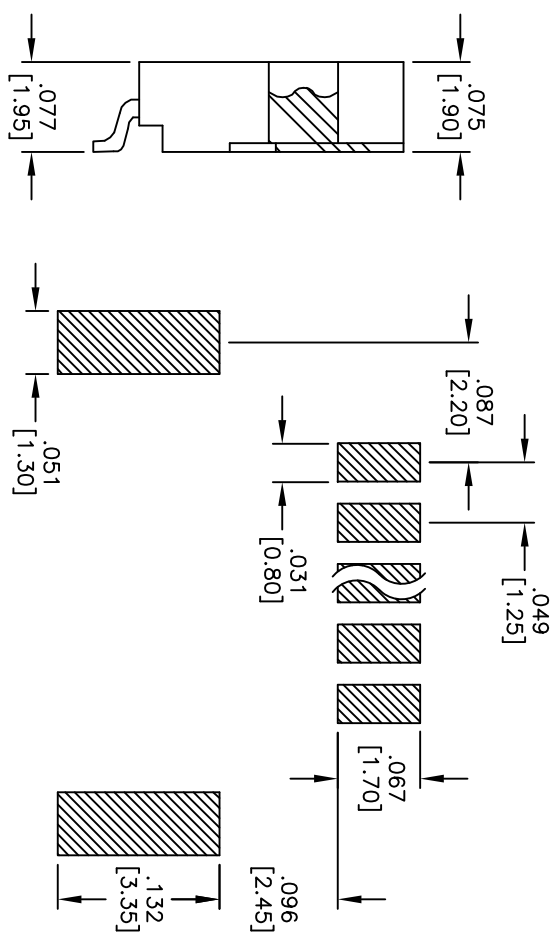
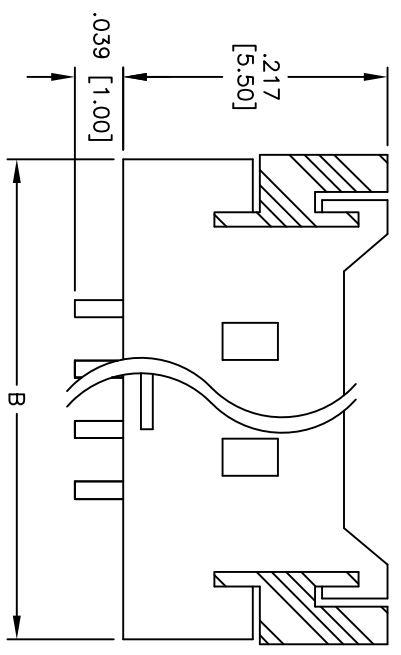


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/27/10	

APPROVED: _____
 DATE: _____ TITLE: _____

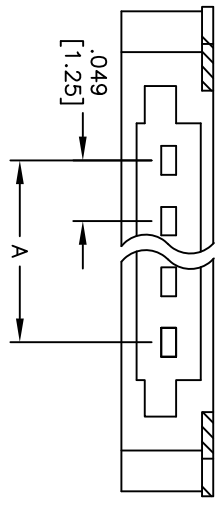

PACKAGED ON TAPE & REEL

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

- Material: Nylon 9T, rated UL 94V-0
- Insulator color: Natural
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall.
- Electrical: Operating voltage: 100 V AC,DC. Current rating: 1A AC,DC. Contact resistance: 20 mohms max. initial Dielectric withstanding voltage: 250 VAC for 1 minute Temperature Rating: Operating temperature: -25°C to +85°C Environmental: Lead free, RoHS compliant Recommended soldering temp: 260°C for 5 seconds

Positions: 02 thru 16 and 18, 20, 22, 24, 26, 28, 30
 A = .049 [1.25] x No. of Spaces
 B = .049 [1.25] x No. of Spaces + .252 [6.40]

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X	±.10
.XX	±.020
.XXX	±.015
.XXX	±.010
ØXX	±.10
ØXXX	±.015
ØXXX	±.010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .049 [1.25] WAFER, SMT, RIGHT ANGLE
 TIN PLATED

SIZE	PART NO.	REV.
X	125SH-G-XX-TR-SMT-T/R	-
REF:	S00123T	
SCALE:	NTS	
SHEET	1 OF 1	

