




TOP VIEW



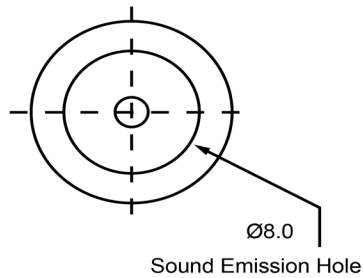

SIDE VIEW

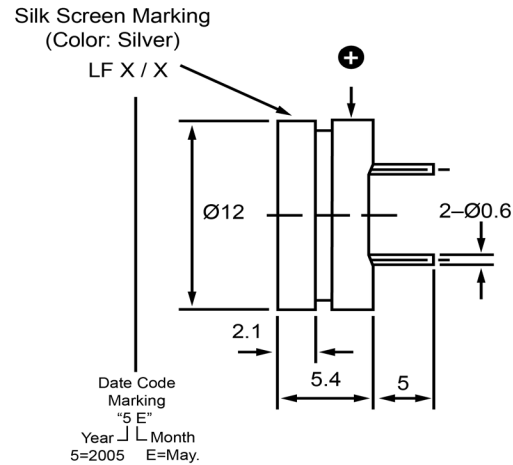

BOTTOM VIEW



Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description	Date	Approved		
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S		
Resonant Frequency	2,048	(Hz)							
Rated Voltage	1.5	(V)							
SPL @ 10cm	70	(dBA)							
Coil Resistance	50	(ohm)							
Mount Type	Thru Hole								
Voltage Range	1 ~ 2	(V)							
Max Rated Current	10	(mA)							
Housing Material	NORYL								
Operating Temperature	-20 ~ +60	°C							
Storage Temperature	-20 ~ +60	°C							
Weight	2	(g)							
						Drawn by   Date   Checked by   Date   Approved by   Date		<b>TE122001-1</b>	
						A.B.   10/21/2013   C.E.   10/21/2013   J.S   10/21/2013			
			<b>Electro-Mechanical Transducer</b>						