

Low Pass Filter for Cable Modem Applications EPB5206G & EPB5206G-RC




- Integrated LPF designed to work with Broadcom's BCM3033, BCM3137 and BCM3210 Chips
- Robust construction to meet IR/VP soldering processes
- Add "-RC" after part number for RoHS Compliant
- Available in SMD, DIP and DIL Packages

Electrical Parameters @ 25° C


Cut-off Frequency (MHz)	Insertion Loss (dB Max.)	Return Loss (dB Min.)	Attenuation (dB)				
			@ 60 MHz (Typ)	@ 80 MHz (Typ)	@ 100 MHz (Min)	@ 200 MHz (Min)	@ 200-300 MHz (Typ)
± 3.0 MHz	5-42 MHz	5-42 MHz	-10	-30	-30	-40	-50
52	-1	-15					

- Characteristic Filter Impedance : 75
- Crosstalk :-70dB Typ (5-42MHz)

Package

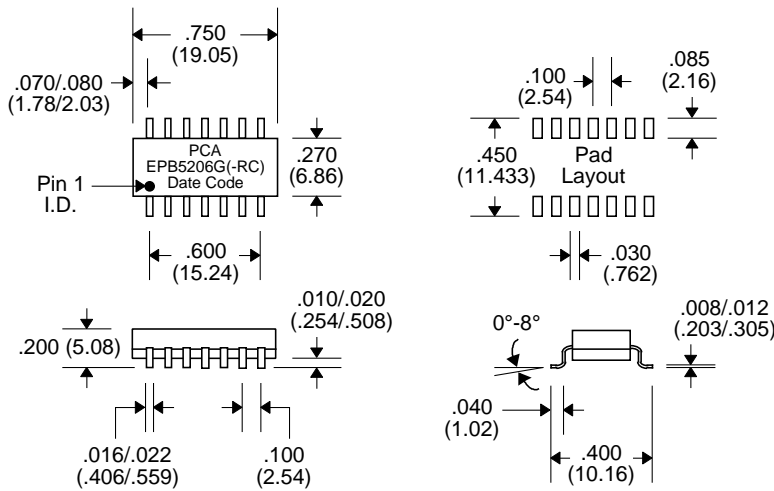

Schematic



Notes :	EPB5206G	EPB5206G-RC
1. Lead Finish	SnPb	Hot Tin Dip (Sn) †
2. Peak Temperature Rating	225°C	245°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, 30°C/60%RH)	MSL = 4 (72 Hours, 30°C/60%RH)
4. Weight	TBD grams	TBD grams
5. Packaging Information (Tube)	TBD pieces/tube	TBD pieces/tube
(*Add "TR" to end of part number, but in front of "-RC" when placing order) (Tape & Reel)	TBD pieces/13" reel (*EPB5206GTR)	TBD pieces/13" reel (*EPB5206GTR-RC)

† Hot tin dipped over Matte Tin with Ni Barrier

Documentor/Date

'd By

Project Engineer/Date

Engineering/Date

Quality Assurance/Date

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25