

Multilayer Ceramic Chip Capacitors

CGA5L1X5R1C156M160AC










TDK item description CGA5L1X5R1C156MT****

Applications	Automotive Grade
Feature	General General (Up to 50V) AEC-Q200 AEC-Q200
Series	CGA5(3216) [EIA 1206]
Status	Production



	Size
Length(L)	3.20mm +0.30,-0.10mm
Width(W)	1.60mm +0.30,-0.10mm
Thickness(T)	1.60mm +0.30,-0.10mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	1.00mm Min.
Recommended Land Pattern (PA)	2.10mm to 2.50mm(Flow Soldering)
neconinienteet Lanti Fattern (FA)	2.00mm to 2.40mm(Reflow Soldering)
Recommended Land Pattern (PB)	1.10mm to 1.30mm(Flow Soldering)
Neconinence Land Lattern (FB)	1.00mm to 1.20mm(Reflow Soldering)
Recommended Land Pattern (PC)	1.00mm to 1.30mm(Flow Soldering)
Recommended Land Fattern (FC)	1.10mm to 1.60mm(Reflow Soldering)

	Electrical Characteristics	
Capacitance	15μF ±20%	
Rated Voltage	16VDC	
Temperature Characteristic	X5R(±15%)	
Dissipation Factor (Max.)	10%	
Insulation Resistance (Min.)	6ΜΩ	

Other		
Coldoring Mathod	Wave (Flow)	
Soldering Method	Reflow	
AEC-Q200	Yes	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

CGA5L1X5R1C156M160AC














Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

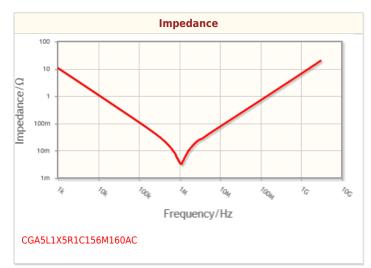

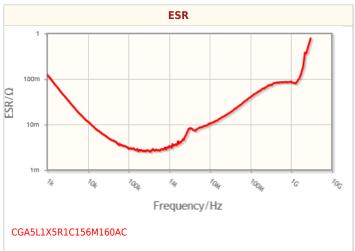



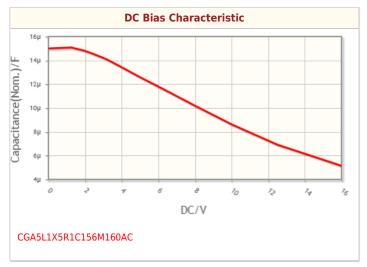

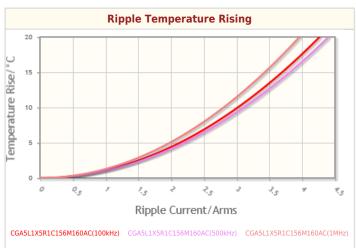

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

CGA5L1X5R1C156M160AC










Associated Images



[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.