Rev	AWO #	Description	Date	Appr
-		RELEASED	3/8/07	

APPROVED: _____

DATE: _____ TITLE: _____

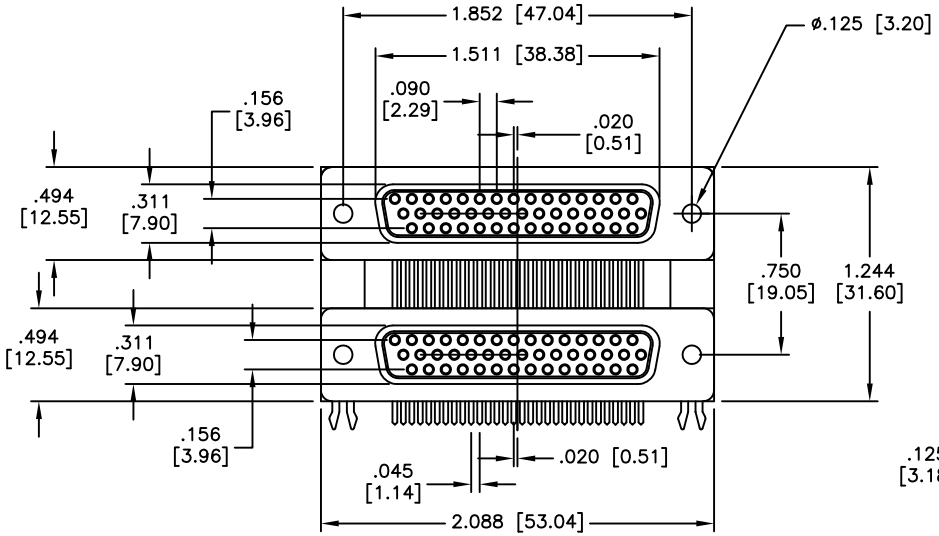

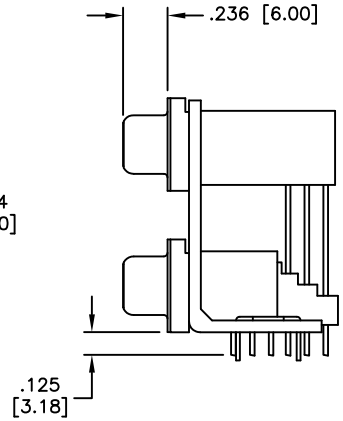

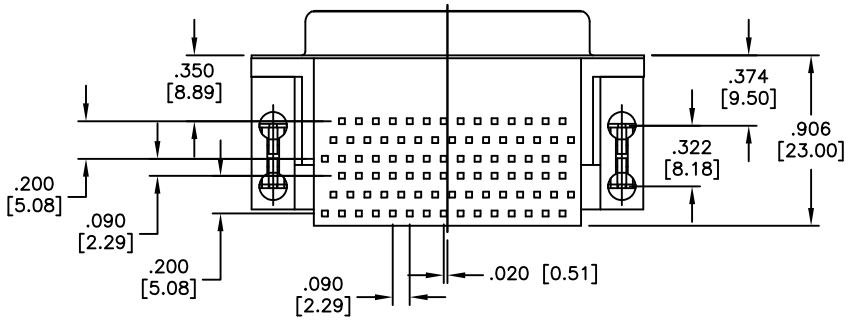

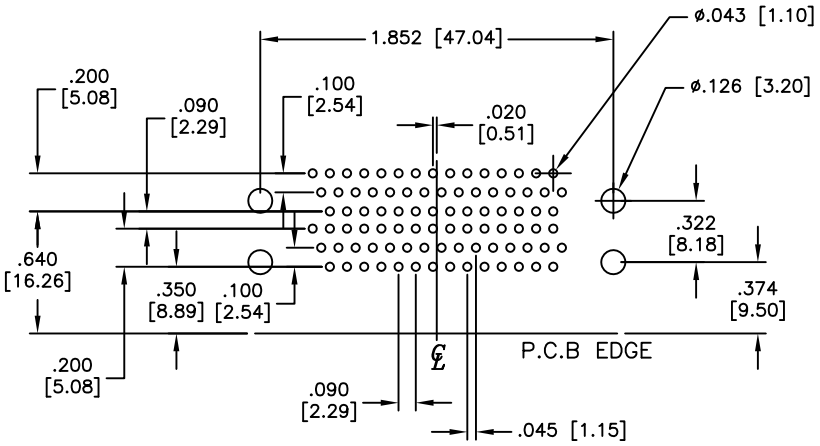

RECOMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: PBT, reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Brass
Shell: Steel, Nickel plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 25 mohms max. initial
Insulation resistance: 5,000 Mohms min.
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C. for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± 0.25		
.XX	± 0.15	Ø.XX	±0.13
.XXX	± 0.05		

APPROVALS		DATE
DRAWN	BW	3/8/07
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
DUAL PORT D-SUB, FEMALE / FEMALE
HD44 OVER HD44, FORKED BOARDLOCKS

SIZE	PART NO.	REV.
X	DPD-HD44-00-B3	-

REF: | SCALE: NTS | SHEET 1 OF 1