

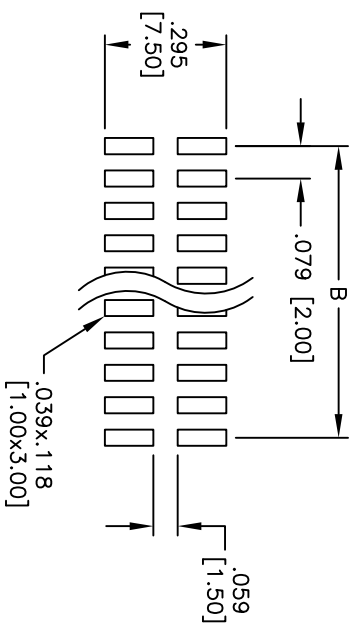
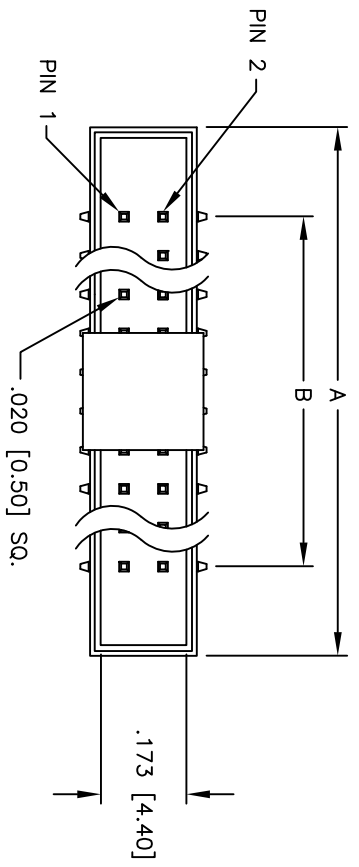


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/08/08	

APPROVED: _____
 DATE: _____ TITLE: _____

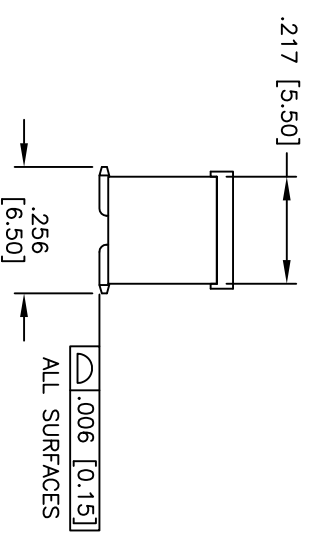

Recommended PCB Layout

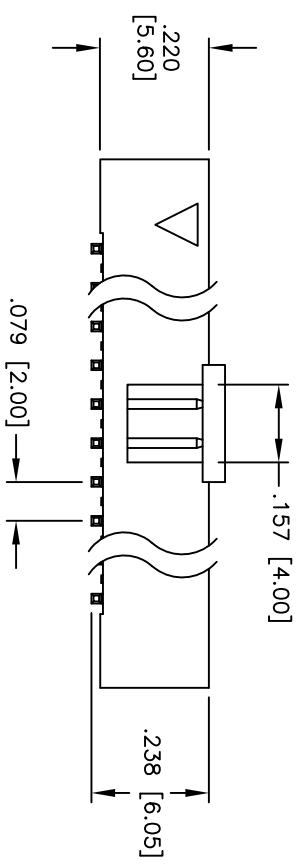

SPECIFICATIONS:

Material: Insulator: Hi-Temp Nylon, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold Flash over Nickel underplate on mating area, Tin over Copper underplate on SMT tails
 Electrical: Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

PACKAGED ON TAPE & REEL
 A = .079 [2.00] x No. of Positions per row + .283 [7.20]
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .10 ØXX ±.10
 .XX ±.020 ØXX ±.015
 .XXX ±.015 ØXXX ±.010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .079 [2.00] BOX HEADER, STRAIGHT,
 GOLD PLATED, SURFACE MOUNT

APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	SCALE:	SHEET	OF	REV.
X	2BHR-XX-VSG-SMT-PP-T/R	NIS	1	OF 1	-