
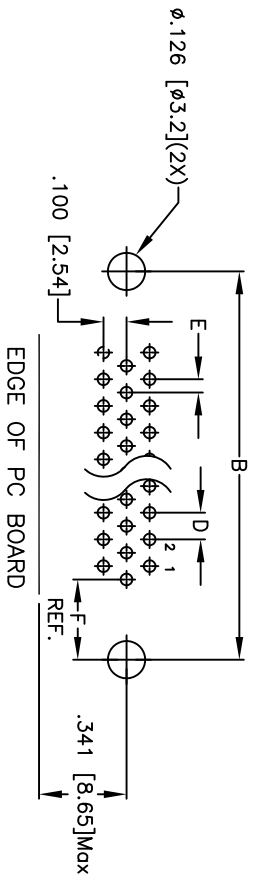
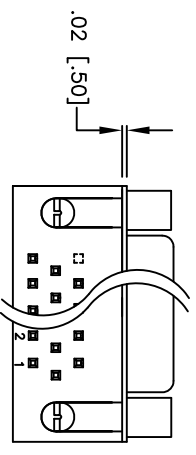
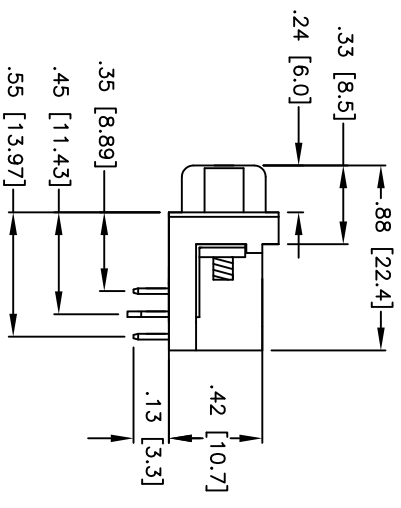


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/04	

POSITION	A	B	C	D	E	F
15	.642 [16.30]	.984 [25.00]	1.21 [30.8]	.090 [2.29]	.045 [1.145]	.289 [7.35]
26	.969 [24.60]	1.311 [33.30]	1.54 [39.2]	.090 [2.29]	.045 [1.145]	.272 [6.92]
44	1.508 [38.30]	1.854 [47.10]	2.09 [53.1]	.090 [2.29]	.045 [1.145]	.274 [6.95]
62	2.157 [54.80]	2.500 [63.50]	2.73 [69.4]	.095 [2.41]	.047 [1.205]	.278 [7.05]

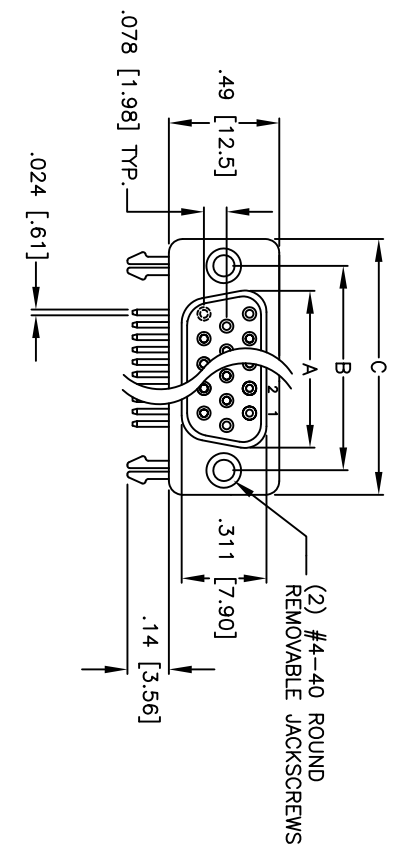

RECOMMENDED PCB LAYOUT (TOP VIEW)
 TOLERANCES: $\pm .004$ [$\pm .10$]

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: 30u" Gold over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating: Operating temperature: -65°C to +125°C

A

B

C

D

A

B

C

D



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLEES

X	$\pm .10$	ϕX	$\pm .10$
.XX	$\pm .020$	ϕXX	$\pm .015$
.XXX	$\pm .015$	ϕXXX	$\pm .010$

APPROVALS: _____ DATE: _____

DRAWN	SS	12/21/04
CHECKED		
APPROVED		

TITLE: D-SUB, FEMALE HI-DENSITY, RIGHT ANGLE, PCB, ROUND JACKSCREWS

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ADAM TECH

SIZE: HDLXX-SL-C-R-30
 PART NO. HDLXX-SL-C-R-30
 SCALE: NTS SHEET 1 OF 1