

Single relay - REL-IR/LDP- 60DC/2X21 - 2833958

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pluggable industrial relay with power contacts, 2 PDT, test button, status LED, free-wheeling diode, mechanical switch position indicator, polarity A1+, A2-, input voltage 60 V DC

The figure shows version: REL-IR/
LDP- 24DC/2X21

Product Features



Key commercial data

Packing unit	1 pc
Minimum order quantity	10 pc
Custom tariff number	85364900
Country of origin	Japan

Technical data

Dimensions

Width	21.5 mm
Height	28 mm
Depth	36 mm

Ambient conditions

Ambient temperature (operation)	-55 °C ... 70 °C
Ambient temperature (storage/transport)	-55 °C ... 70 °C

Coil side

Nominal input voltage U_N	60 V DC
Typical input current at U_N	15 mA
Power dissipation for nominal condition	0.9 W
Typical response time	13 ms

Single relay - REL-IR/LDP- 60DC/2X21 - 2833958

Technical data

Coil side

Typical release time	5 ms
Coil resistance	3977 Ω \pm 15 % (at 20 °C)

Contact side

Contact type	2 PDT
Contact material	Ag
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V
Maximum inrush current	20 A (15 ms)
Min. switching current	1 mA
Limiting continuous current	10 A
Interrupting rating (ohmic load) max.	2500 VA (for 250 V AC)

General

Test voltage relay winding/relay contact	2 kV AC (50 Hz, 1 min.)
Test voltage relay contact/relay contact	2 kV AC (50 Hz, 1 min.)
Operating mode	100% operating factor
Mechanical service life	5 x 10 ⁷ cycles
Standards/regulations	EN 61810-1
	EN 50178
	IEC 62103
Pollution degree	2
Surge voltage category	II
Mounting position	any
Assembly instructions	On relay base PR2

Connection data

Connection method	Plug / solder connection
-------------------	--------------------------

Classifications

eCl@ss

eCl@ss 4.0	27371104
eCl@ss 4.1	27371104
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371001
eCl@ss 7.0	27371001
eCl@ss 8.0	27371601

Single relay - REL-IR/LDP- 60DC/2X21 - 2833958

Classifications

ETIM

ETIM 2.0	EC000196
ETIM 3.0	EC000196
ETIM 4.0	EC000196
ETIM 5.0	EC001437

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39121515

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approvals submitted

Approval details

UL Listed 

cUL Listed 
--

EAC


Single relay - REL-IR/LDP- 60DC/2X21 - 2833958

Approvals




Drawings

Diagram

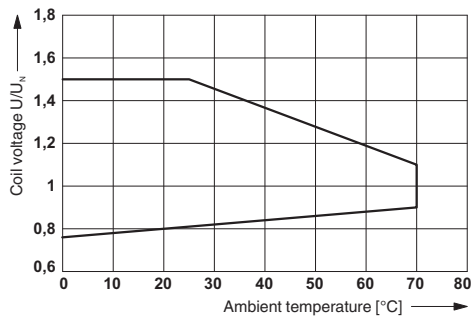


Diagram

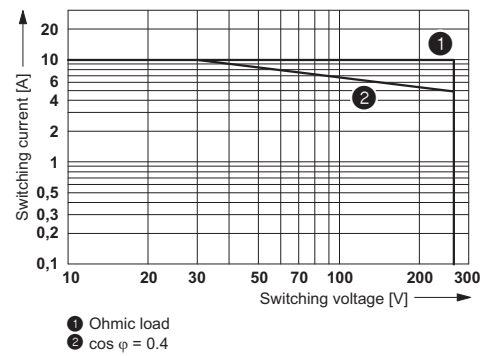


Operating voltage range

Diagram

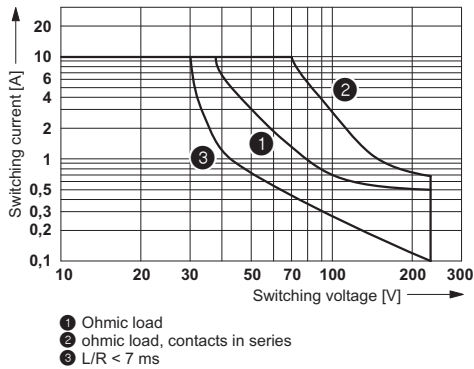

AC interrupting rating

Diagram

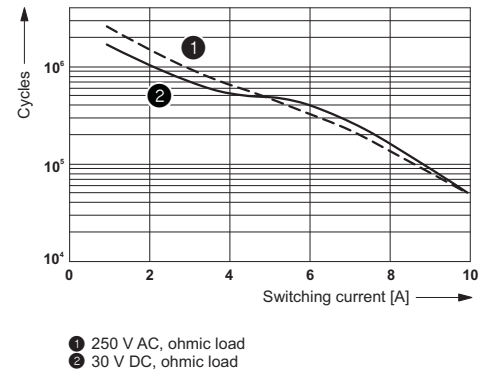


DC interrupting rating


Electrical service life

Single relay - REL-IR/LDP- 60DC/2X21 - 2833958

Diagram

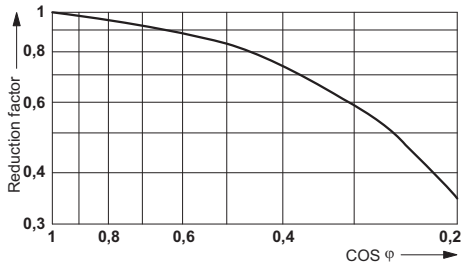

Circuit diagram



Shown without LED and damping diode.

Contacts 21, 22, 24 are led onto relay socket connections 41, 42, 44.

Service life reduction factor