



Bestückungsplan / contact layout

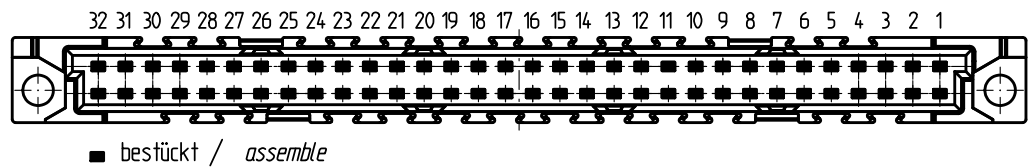

Leiterplatten-Lochbild / PCB drillhole pattern

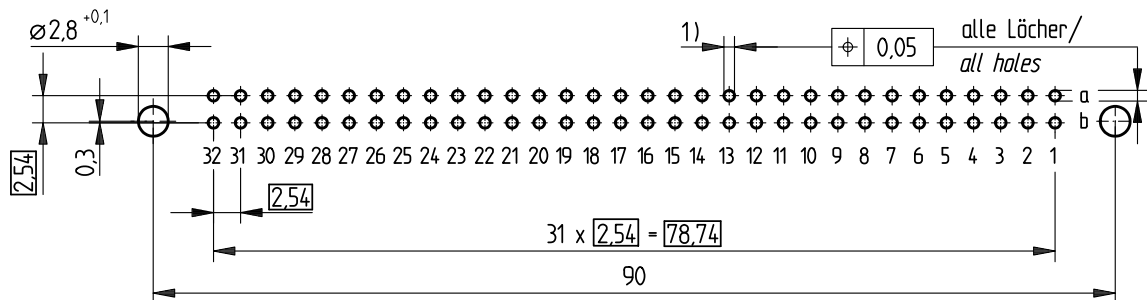

Elastische Einpresszone / compliant pressfit zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr.6

diameter of drilled hole see drawing 164062 / No.6

- 1) $\phi 1,0 \pm 0,09$ Durchmesser des metallisierten Loches
 $\phi 1,0 \pm 0,09$ Diameter of finished plated-through hole
- $\phi 1,15 \pm 0,025$ Bohrungsdurchmesser des Loches
 $\phi 1,15 \pm 0,025$ Diameter of drilled hole

Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Tolerances 	Scale 2:1
	All Dimensions in mm	
Subject to modification without prior notice. Drawing will not be updated.	Designation Federleiste B 64 EE Fem. Connector B 64 Pressfit	
	www.ERNI.com	284177
Index	Date	H:00062853.SZA STVB