
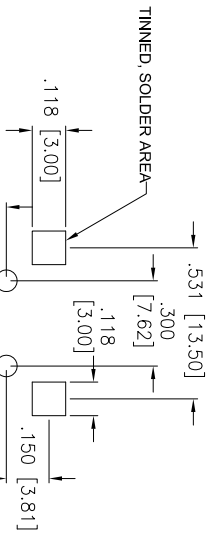

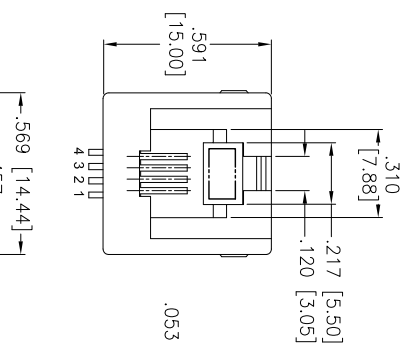



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/7/11	
A		UPDATE SPEC.	10/8/14	AV/CH

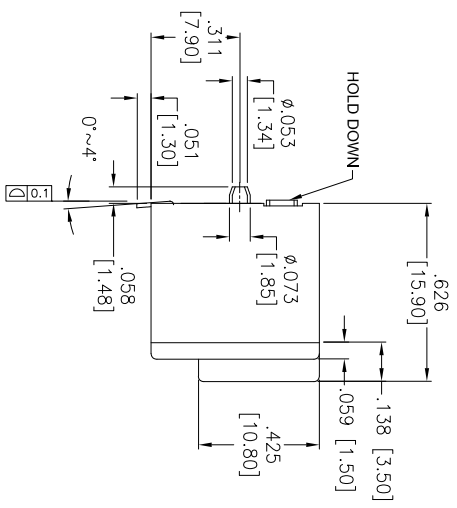

RECOMMENDED PCB LAYOUT

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

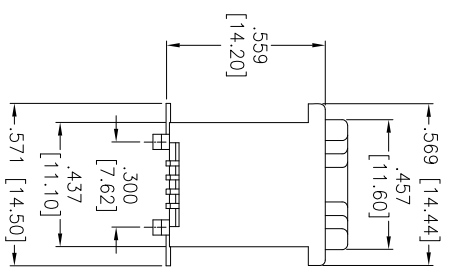

SPECIFICATIONS:

- Material: Insulator: PA9T, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Hold down: Copper Alloy, Tin plated
- Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails (See chart for thickness).
- Electrical: Operating voltage: 150 VAC max
- Current rating: 1 Amps max
- Contact resistance: 40 mohms max
- Insulation resistance: 500 Mohms min @ 100 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +85°C
- Environmental: Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ± .10 Ø.X ± .10
 .XX ± .020 Ø.XXX ± .015
 .XXX ± .015 Ø.XXXX ± .010
 HOLES: .X ± .10
 APPROVALS: _____ DATE: 12/7/11

ADAM TECH

909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, 4P4C
 TOP ENTRY, SMT TYPE

DRAWN	CHECKED	APPROVED	SIZE	PART NO.	SCALE	SHEET	REV.
AY	SC		X	MTJ-44VX1-SMT	NTS	1 OF 1	A

