


Glass Passivated Bridge Rectifiers

FEATURES

- UL Recognized File # E-326243
- Glass passivated junction
- Ideal for printed circuit board
- Typical IR less than 0.1uA
- High surge current capability
- ESD capability PASS AEC-Q101 level H3B
- ESD capability PASS IEC6100-4-2 level 4
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition


TS-6P


MECHANICAL DATA

Case : TS-6P


Molding compound, UL flammability classification rating 94V-0
 Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant

Terminal : Matte tin plated leads, solderable per JESD22-B102
 Meet JESD 201 class 1A whisker test

Polarity : Polarity as marked on the body

Mounting torque : 8.17 in-lbs maximum

Weight : 7.15 gram (approximately)



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)					
PARAMETER	SYMBOL	TS50P05G	TS50P06G	TS50P07G	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	600	800	1000	V
Maximum RMS voltage	V _{RMS}	420	560	700	V
Maximum DC blocking voltage	V _{DC}	600	800	1000	V
Maximum average forward rectified current	I _{F(AV)}	50			A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	400			A
Rating for fusing (t<8.3mS)	I ² T	664			A ² sec
Maximum instantaneous forward voltage (Note 1) @ 25 A	V _F	1.1			V
Maximum DC reverse current at rated DC blocking voltage	I _R	T _J =25 °C T _J =125°C	10 500		uA
Typical thermal resistance (Note 2)	R _{θJC}	3.7			°C/W
Operating junction temperature range	T _J	- 55 to + 150			°C
Storage temperature range	T _{STG}	- 55 to + 150			°C

Note 1 : Pulse test with PW=300u sec, 1% duty cycle

Note 2 : Mount on Heatsink size of 4" x 6" x 0.25" Al-Plate

ORDERING INFORMATION				
PART NO.	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
TS50P0xG (Note 1)	C2	Suffix "G"	TS-6P	15 / TUBE
	X0		TS-6P	Forming
	D2		TS-6P	15 / TUBE (Auto)
	X2		TS-6P	Forming

Note 1: "x" defines voltage from 600V (TS50P05G) to 1000V (TS50P07G)

EXAMPLE				
PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
TS50P07G C2	TS50P07G	C2		
TS50P07G C2G	TS50P07G	C2	G	Green compound

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

FIG. 1 FORWARD CURRENT DERATING CURVE

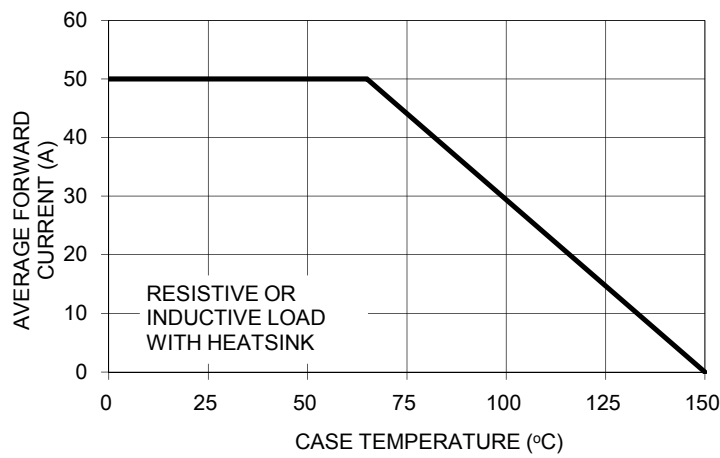


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

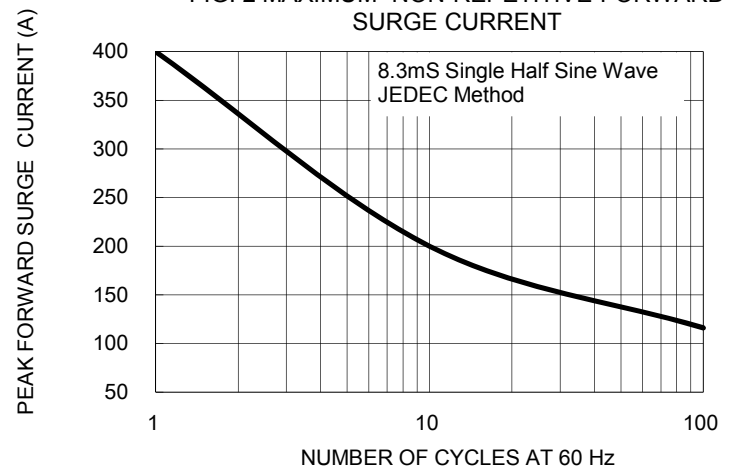


FIG. 3 TYPICAL REVERSE CHARACTERISTICS

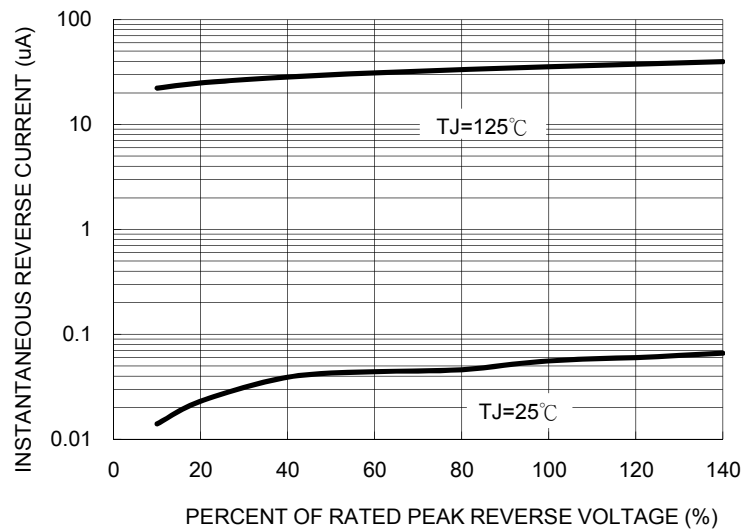


FIG. 4 TYPICAL FORWARD CHARACTERISTICS



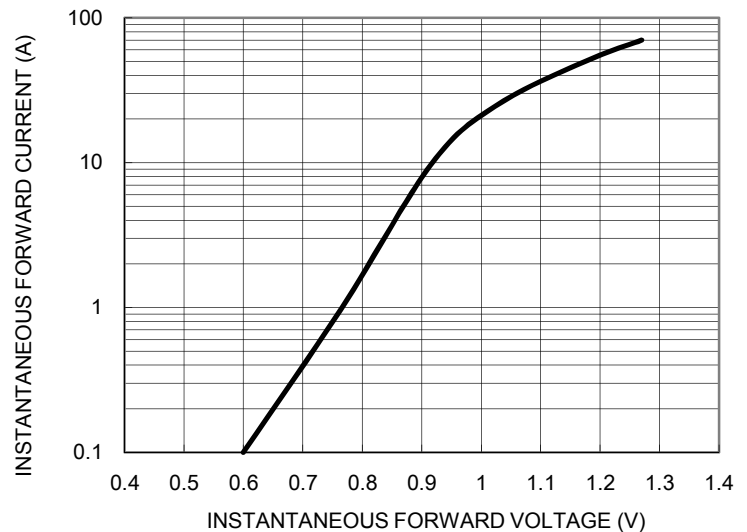


FIG. 5 TYPICAL JUNCTION CAPACITANCE

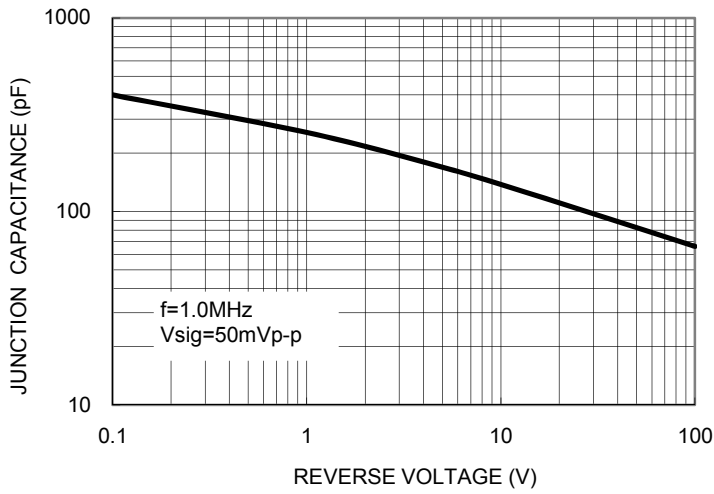

PACKAGE OUTLINE DIMENSIONS

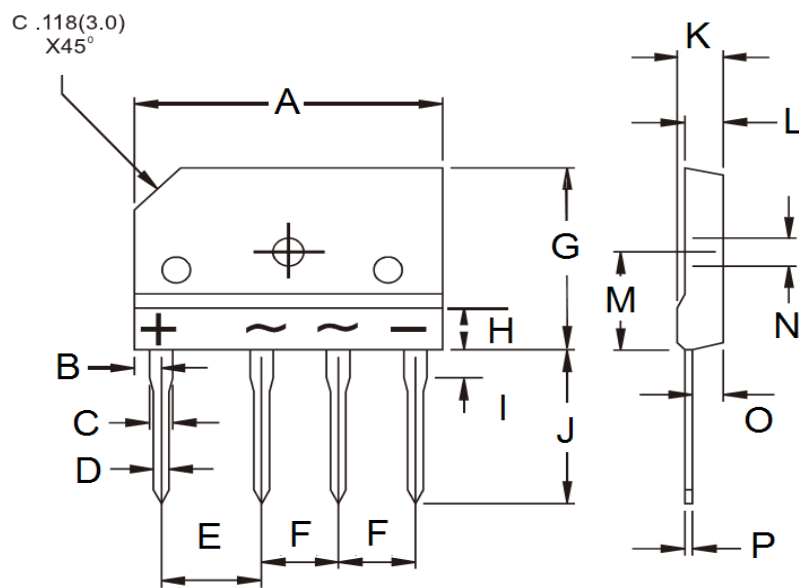

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	29.70	30.30	1.169	1.193
B	2.30	2.70	0.091	0.106
C	2.00	2.40	0.079	0.094
D	0.90	1.10	0.035	0.043
E	9.80	10.20	0.386	0.402
F	7.30	7.70	0.287	0.303
G	19.70	20.30	0.776	0.799
H	-	4.80	-	0.189
I	3.80	4.20	0.150	0.165
J	17.00	18.00	0.669	0.709
K	4.40	4.80	0.173	0.189
L	3.40	3.80	0.134	0.150
M	10.80	11.20	0.425	0.441
N	3.10	3.40	0.122	0.134
O	2.50	2.90	0.098	0.114
P	0.60	0.70	0.024	0.028

MARKING DIAGRAM



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code