


1075-13-9

REVISIONS

ISSUE	CHANGES
5	CN 39633 E DCT 9/15/6
G	REVISED PER DMF304 & ER040887 KPL 03/12/12

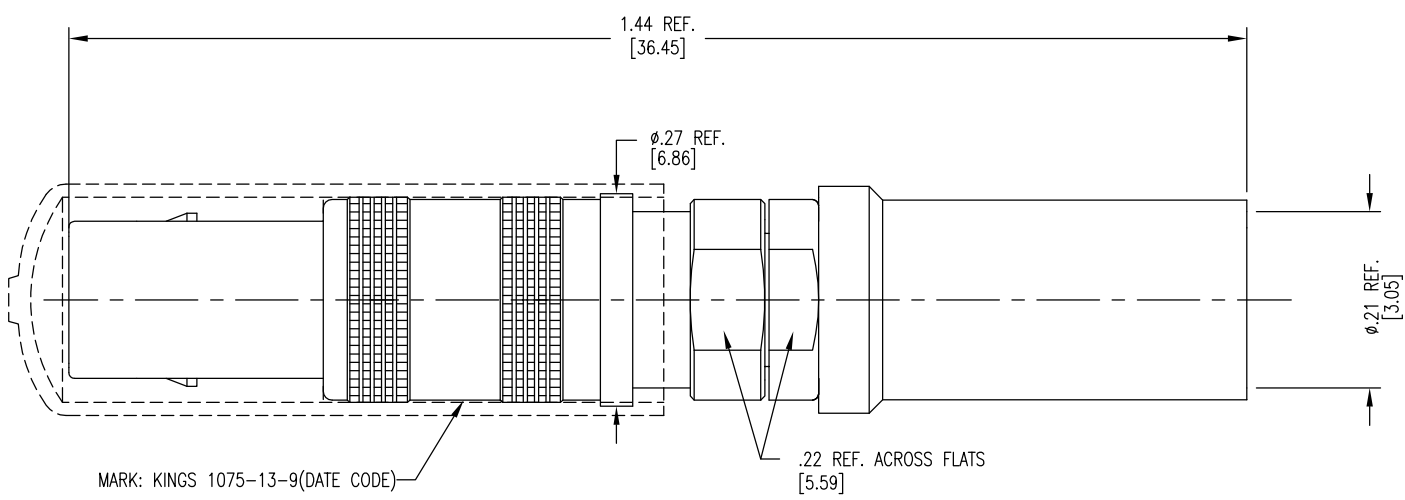

- NOTES:
- FOR USE WITH BOEING BMS 13-65 TYPE OF.
  - FOR CABLING INSTRUCTIONS SEE 3-644-1.
  - FOR CRIMPING USE DIE KTH-2232.
  - FOR CRIMPING USE DIE KTH-2232.
  - MARK PACKAGE: KINGS 1075-13-9 (DATE CODE)
  - MATERIALS:  
INSULATORS: TEFLON, ASTM D1710  
K-GRIP SLEEVE: COM. BRONZE, ASTM B135  
K-LOC BODY: BER. COPPER, ASTM B196  
CAP: VINYL  
ALL OTHER METAL PARTS: BRASS, ASTM B16
  - FINISHES:  
CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM B488 OVER  
.000050 MIN. NICKEL PER AMS-QQ-N-290 (RoHS)  
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290  
OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
  - ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE: 50 OHMS  
WORKING VOLTAGE: 500 VRMS
  - DIMENSIONS IN INCHES [MM]
  - WEIGHT: 4.9 GRAMS

CUSTOMER SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE	6:1		
APPROX SURFACE AREA			
WAS:	E-18942		
CAGE CODE:	91836		
REF:			
PLUG, K-LOC			
DRAWN	VLS	DATE	06/22/95
DESIGN	VLS	DATE	06/22/95
APPR.	VLS	DATE	06/22/95



1075-13-9