



## PRELIMINARY

# Data Sheet

# MicroRAM™

## Output Ripple Attenuation Module

### Features

- >40dB ripple attenuation from 60Hz to 1MHz
- Integrated OR'ing diode supports N+1 redundancy
- Significantly improves load transient response
- Efficiency up to 98%
- User selectable performance optimization
- Combined active and passive filtering
- 3-30Vdc input range
- 20 and 30 Ampere ratings

Patents Pending



Shown actual size:  
2.28 x 1.45 x 0.5 in  
57,9 x 36,8 x 12,7 mm

### Product Highlights

Vicor's MicroRAM output ripple attenuation module combines both active and passive filtering to achieve greater than 40dB of noise attenuation from 60Hz to 1Mhz. The MicroRAM operates over a range of 3 to 30Vdc, is available in either 20 or 30A models and is compatible with most manufacturers switching converters including Vicor's 1st and 2nd Generation DC-DC converters.

The MicroRAM's closed loop architecture greatly improves load transient response and with dual mode control, insures precise point of load voltage regulation. The MicroRAM supports redundant and parallel operation with its integrated OR'ing diode function.

It is available in Vicor's standard micro package (quarter brick) with a variety of terminations for through hole, socket or surface mount applications.


### Absolute Maximum Ratings

| Parameter                          | Rating          | Unit         | Notes              |
|------------------------------------|-----------------|--------------|--------------------|
| +In to -In                         | 30              | Vdc          | Continuous         |
| +In to -In                         | 40              | Vdc          | 100ms              |
| Load current                       | 40              | Adc          | Continuous         |
| Ripple Input (Vp-p)                | 100             | mV           | 60Hz<100 kHz       |
| Ripple Input (Vp-p)                | 500             | mV           | 100kHz-2MHz        |
| Mounting torque                    | 4-6 (0.45-0.68) | In. lbs (Nm) | 6 each, 4-40 screw |
| Pin soldering temperature          | 500 (260)       | °F (°C)      | 5 sec; wave solder |
| Pin soldering temperature          | 750 (390)       | °F (°C)      | 7 sec; wave solder |
| Storage temperature (C, T-Grade)   | -40 to +125     | °C           |                    |
| Storage temperature (H-Grade)      | -55 to +125     | °C           |                    |
| Storage temperature (M-Grade)      | -65 to +125     | °C           |                    |
| Operating temperature (C-Grade)    | -20 to +100     | °C           | Baseplate          |
| Operating temperature (T, H-Grade) | -40 to +100     | °C           | Baseplate          |
| Operating temperature (M-Grade)    | -55 to +100     | °C           | Baseplate          |

### Thermal Resistance

| Parameter                                       | Typ  | Unit    |
|---|------|---------|
| Baseplate to sink; flat, greased surface        | 0.16 | °C/Watt |
| Baseplate to sink; with thermal pad (P/N 20264) | 0.14 | °C/Watt |
| Baseplate to ambient                            | 8.0  | °C/Watt |
| Baseplate to ambient; 1000 LFM                  | 1.9  | °C/Watt |

### Part Numbering

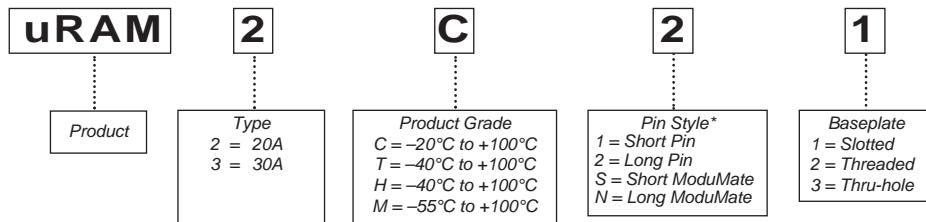

\*Pin styles S & N are compatible with the ModuMate interconnect system for socketing and surface mounting.

# PRELIMINARY

## Electrical Characteristics

Electrical characteristics apply over the full operating range of input voltage, output power and baseplate temperature, unless otherwise specified. All temperatures refer to the operating temperature at the center of the baseplate.

### ■ μRAM MODULE SPECIFICATIONS (-20°C to +100°C baseplate temperature)

| Parameter   | Min          | Typ | Max         | Unit           | Notes  |
|---|--------------|-----|-------------|----------------|--|
| Operating current range<br>μRAM2xxx<br>μRAM3xxx   | 0.02<br>0.02 |     | 20<br>30    | A<br>A         | No internal current limiting. Converter input must be properly fused such that the μRAM output current does not exceed the maximum operating current rating by more than 30% under a steady state condition. |
| Operating input voltage   | 3.0          |     | 30          | Vdc            | Continuous   |
| Transient output response<br>Load current step <1A/μsec   |              |     | 50          | mVp-p          | Step load change;<br>see Figures 9, 12, & 15, pp. 6-7  |
| Transient output response<br>Load current step <1A/μsec<br>(C <sub>TRAN</sub> = 820μF)          |              |     | 50          | mVp-p          | Optional capacitance C <sub>TRAN</sub> can be used to increase transient current capability; See Figures 1 & 2 on p. 3 and Figures 10, 13, & 16 on pp. 6-7   |
| V <sub>HR</sub> headroom voltage range <sup>(1)</sup><br>@ 1A load                              | 325          |     | 425         | mV             | See Figures 5, 6 & 7<br>See Table 1 for headroom setting resistor values   |
| Output ripple<br>Input V <sub>p-p</sub> = 100mV   |              |     | 10<br>5     | mVp-p<br>mVrms | Ripple frequency 60Hz to 100kHz; optional capacitor C <sub>HR</sub> = 100μF required to increase low frequency attenuation as shown in Figures 3a and 3b<br>see Figures 8, 11, & 14, pp. 6-7                 |
| Output ripple<br>Input V <sub>p-p</sub> = 500mV   |              |     | 10<br>5     | mVp-p<br>mVrms | Ripple frequency 100kHz to 2MHz;<br>see Figures 8, 11, & 14, pp. 6-7   |
| SC output voltage <sup>(2)</sup>  | 1.23         |     |             | Vdc            | See Table 1 Rsc value  |
| OR'ing threshold  | 10           |     |             | mV             | V <sub>in</sub> – V <sub>out</sub>   |
| μRAM bias current   |              |     | 60          | mA             |  |
| Power Dissipation<br>μRAM2xxx V <sub>HR</sub> = 380mV@1A<br>μRAM3xxx V <sub>HR</sub> = 380mV@1A |              |     | 7.5<br>11.5 | W              | V <sub>in</sub> = 28V; I <sub>out</sub> = 20A<br>V <sub>in</sub> = 28V; I <sub>out</sub> = 30A   |

<sup>(1)</sup> Headroom is the voltage difference between the +Input and +Output pins.



$$R_{HR} = (\mu\text{RAM} \text{ +Out}/V_{HR}) \times 2.3k \text{ (see Table 1 for example values)}$$

<sup>(2)</sup> SC resistor is required to trim the converter output up to accommodate the headroom of the μRAM module when remote sense is not used. This feature can only be used when the trim reference of the converter is in the 1.21 to 1.25 Volt range.  
(see Table 1 with calculated Rsc resistor values)

$$R_{SC} = ((\mu\text{RAM} \text{ +Out})/1.23V \times 1k) - 2k$$

| μRAM Out | V <sub>HR</sub> @ 1A | R <sub>HR</sub> Value (ohms) | R <sub>SC</sub> Value (ohms) |
|----------|----------------------|------------------------------|------------------------------|
| 3.0V     | 375mV                | 18.4k                        | 0.439k                       |
| 5.0V     | 375mV                | 30.6k                        | 2.07k                        |
| 12.0V    | 375mV                | 73.6k                        | 7.76k                        |
| 15.0V    | 375mV                | 92.0k                        | 10.20k                       |
| 24.0V    | 375mV                | 147.2k                       | 17.50k                       |
| 28.0V    | 375mV                | 171.7k                       | 20.76k                       |

**Table 1**—R<sub>HR</sub> and R<sub>SC</sub> are computed values for a 375mV case. To compute different headroom voltages, or for standard resistor values and tolerances, use Notes 1 and 2.

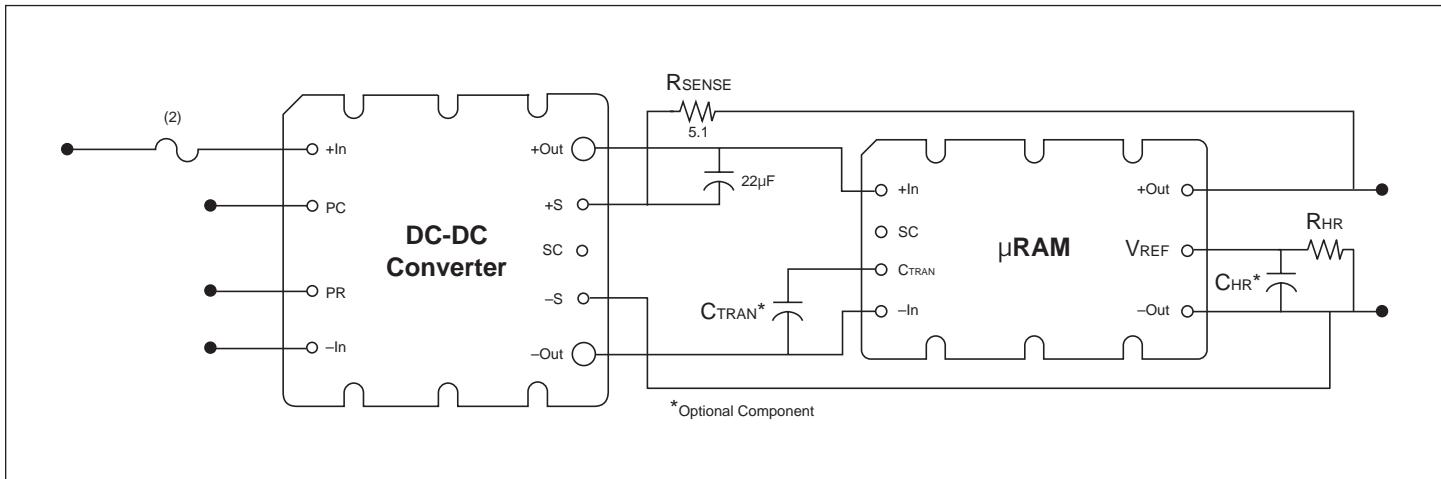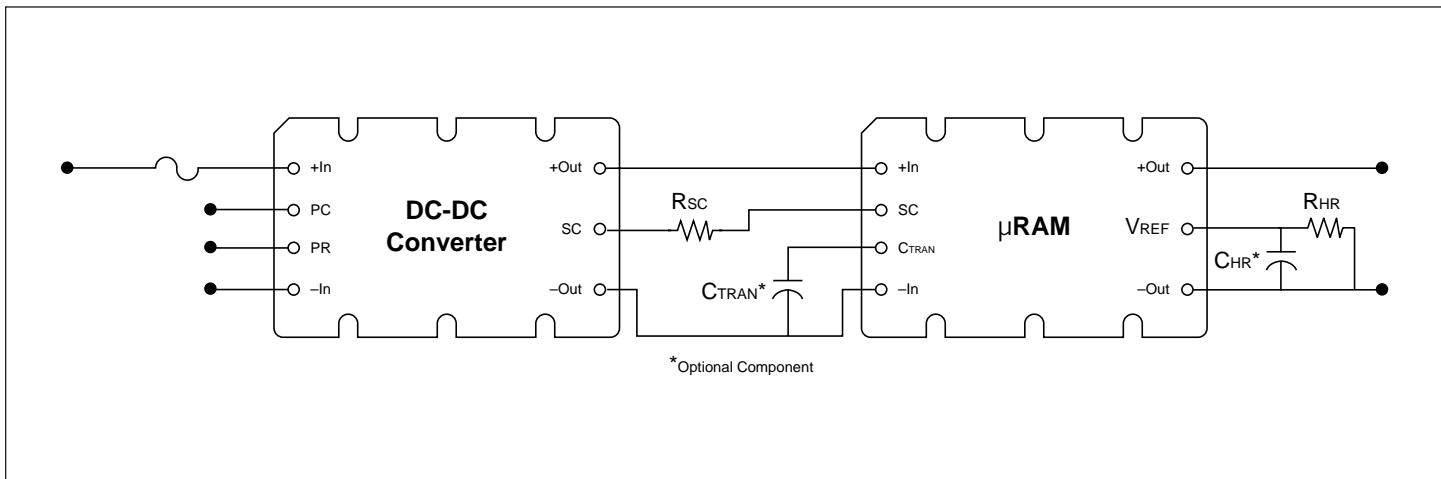**Electrical Characteristics (continued)****■ APPLICATION SCHEMATIC DRAWINGS USING VICOR CONVERTERS AND THE  $\mu$ RAM****Figure 1—Typical Configuration using Remote Sensing****Figure 2—Typical Configuration using SC Control (Oppional C<sub>HR</sub> 25µF maximum in SC configuration.)****Functional Description**

The MicroRAM has an internal passive filter that effectively attenuates ripple in the 50kHz to 1MHz range. An active filter provides attenuation from low frequency up to the 1MHz range. The user must set the headroom voltage of the active block with the external RHR resistor to optimize performance. The MicroRAM must be connected as shown in Figures 1 or 2 depending on the load sensing method. The transient load current performance can be increased by the addition of optional CTRAN capacitance to the CTRAN pin. The low frequency ripple attenuation can be increased by addition of optional CHR capacitance to the VREF pin as shown in Figures 3a and 3b, on p. 5.

Transient load current is supplied by the internal CTRAN capacitance, plus optional external capacitance, during the time it takes the converter loop to respond to the increase in load. The MicroRAM's active loop responds in roughly one microsecond to output voltage perturbations. There are limitations to the magnitude and the rate of change of the transient current that the MicroRAM can sustain while the converter responds. See Figures 8-16, on pp. 6 and 7, for examples of dynamic performance. A larger headroom voltage setting will provide increased transient performance, ripple attenuation and power dissipation while reducing overall efficiency (see Figures 4a, 4b, 4c and 4d on p. 5).

## Functional Description (continued)


The active loop senses the output current and reduces the headroom voltage in a linear fashion to approximate constant power dissipation of MicroRAM with increasing loads (see Figures 5, 6 & 7, p. 6). The headroom setting can be reduced to decrease power dissipation where the transient requirement is low and efficient ripple attenuation is the primary performance concern.

The active dynamic headroom range is limited on the low end by the initial headroom setting and the maximum expected load. If the maximum load in the application is 10 Amps, for example, the 1 Amp headroom can be set 75mV lower to conserve power and still have active headroom at the maximum load current of 10 Amps. The high end or maximum headroom range is limited by the internal OR'ing diode function.

The SC or trim-up function can be used when remote sensing is not available on the source converter or is not desirable. It is specifically designed for converters with a 1.23 Volt reference and a 1k ohm input impedance like Vicor 2nd Generation converters. In comparison to remote sensing, the SC configuration will have an error in the load voltage versus load current. It will be proportional to the

output current and the resistance of the load path from the output of the MicroRAM to the load.

The OR'ing feature prevents current flowing from the output of the MicroRAM back through its input terminal in a redundant system configuration in the event that a converter output fails. When the converter output supplying the MicroRAM drops below the OR'ed output voltage potential of the redundant system, the input of the MicroRAM is isolated from its output. Less than 50mA will flow out of the input terminal of the MicroRAM over the full range of input voltage under this condition.

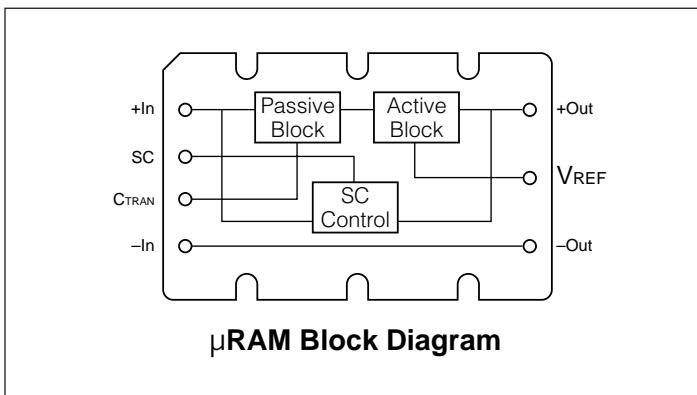

## Application Notes

Load capacitance can affect the overall phase margin of the MicroRAM active loop as well as the phase margin of the converter loop. The distributed variables such as inductance of the load path, the capacitor type and value as well as its ESR and ESL also affect transient capability at the load. The following guidelines should be considered when point of load capacitance is used with the MicroRAM in order to maintain a minimum of 30 degrees of phase margin.



### 1) Using ceramic load capacitance with <1milliohm ESR and <1nH ESL:

- (a) 20 $\mu$ F to 200 $\mu$ F requires 20nH of trace/wire load path inductance
- (b) 200 $\mu$ F to 1,000 $\mu$ F requires 60nH of trace/wire load path inductance



- 2) For the case where load capacitance is connected directly to the output of the MicroRAM, i.e. no trace inductance, and the ESR is >1 milliohm:
  - (a) 20 $\mu$ F to 200 $\mu$ F load capacitance needs an ESL of >50nH
  - (b) 200 $\mu$ F to 1,000 $\mu$ F load capacitance needs an ESL of >5nH
- 3) Adding low ESR capacitance directly at the output terminals of MicroRAM is not recommended and may cause stability problems.
- 4) In practice the distributed board or wire inductance at a load or on a load board will be sufficient to isolate the output of the MicroRAM from any load capacitance and minimize any appreciable effect on phase margin.

# PRELIMINARY



## **µRAM2xxx**

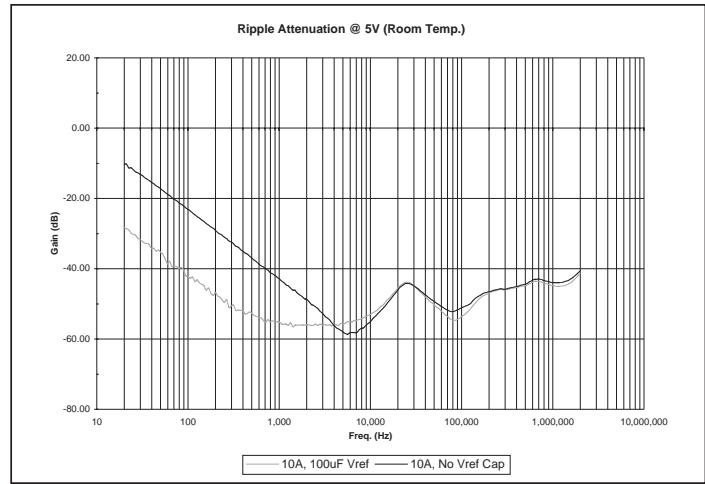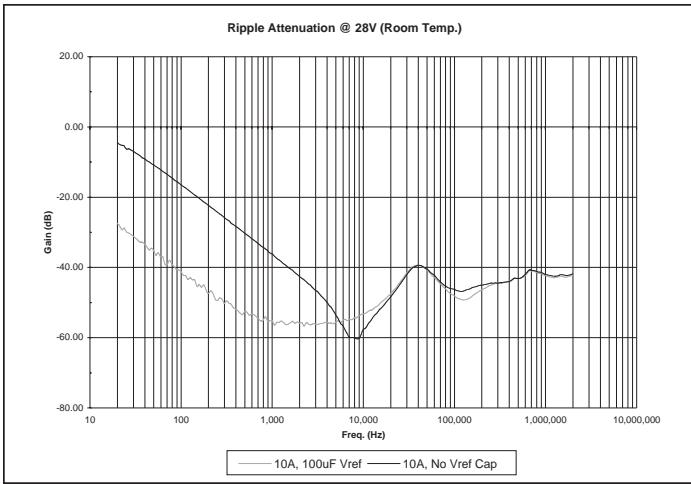

**Figure 3a, 3b**—Curves demonstrating the small signal attenuation performance as measured on a network analyzer with a typical module at (a) 28V and 10A output and (b) 5V and 10A. The low frequency attenuation can be enhanced by connecting a 100 $\mu$ F capacitor, CHR, to the VREF pin as shown in Figures 1 and 2.

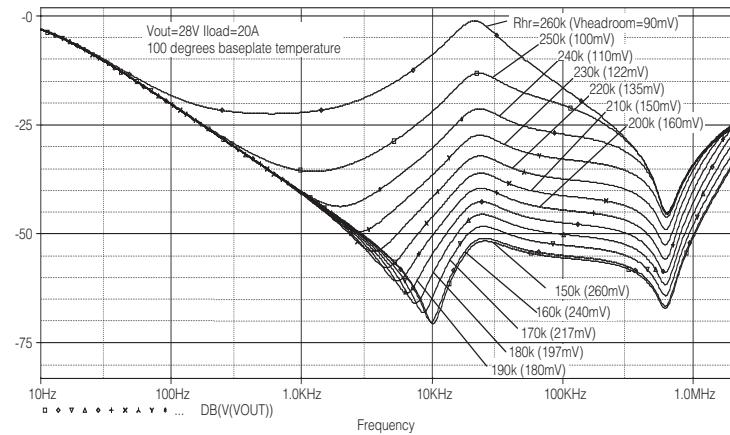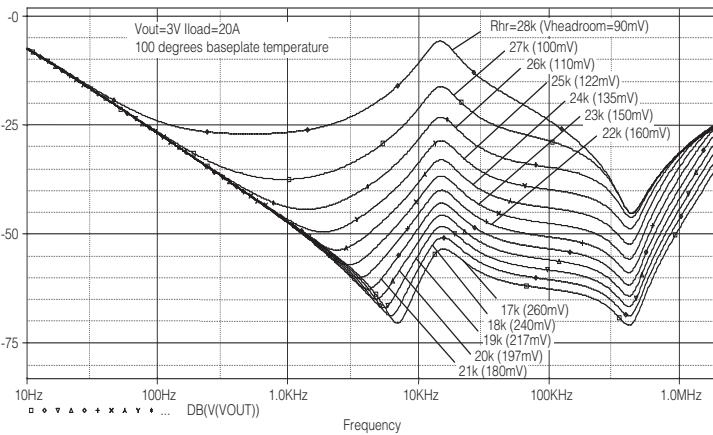

**Figure 4a-4b**—Simulated graphs demonstrating the tradeoff of attenuation versus headroom setting at 20 Amps and an equivalent 100°C baseplate temperature at 3V and 28V.

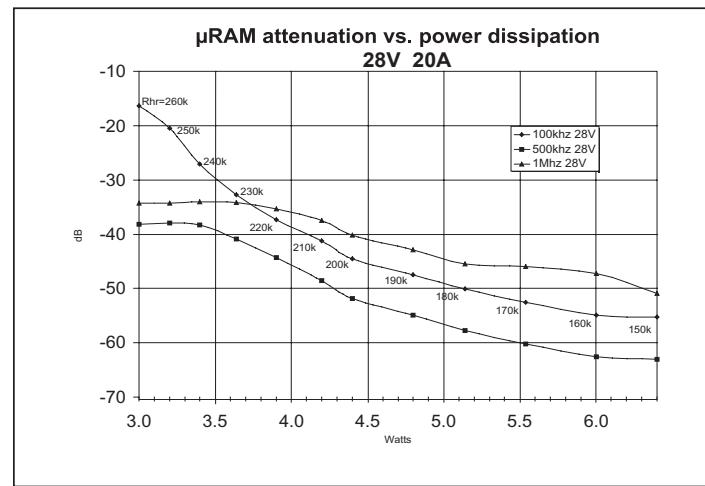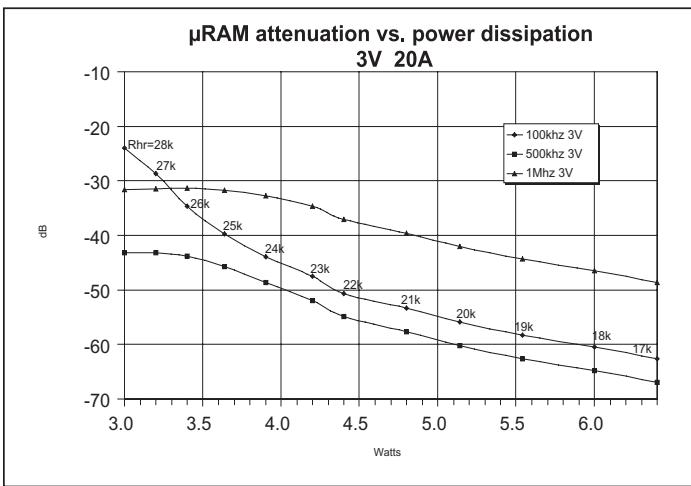

**Figure 4c-4d**—MicroRam attenuation vs. power dissipation at 3V 20A, and 28V 20A.

**Notes:** The measurements in Figures 8-16 were taken with a µRAM2C21 and standard scope probes with a 20MHz bandwidth scope setting. The criteria for transient current capability was as follows: The transient load current step was incremented from 10A to the peak value indicated, then stepped back to 10A until the resulting output peak to peak was around 40mV.

# PRELIMINARY

**µRAM2xxx** (*µRAM3xxx data not included in this rev.*)

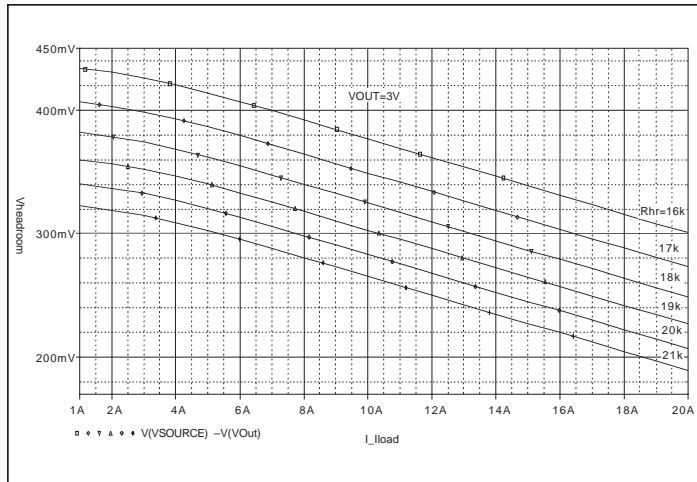


Figure 5—Headroom vs. load current at 3V output.

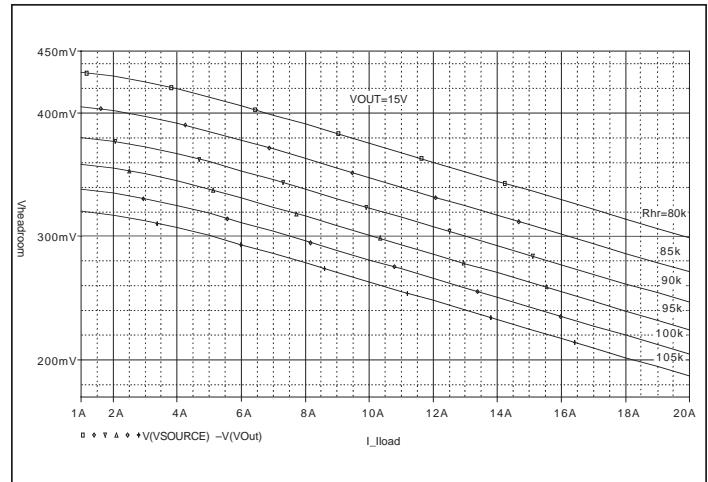


Figure 6—Headroom vs. load current at 15V output.

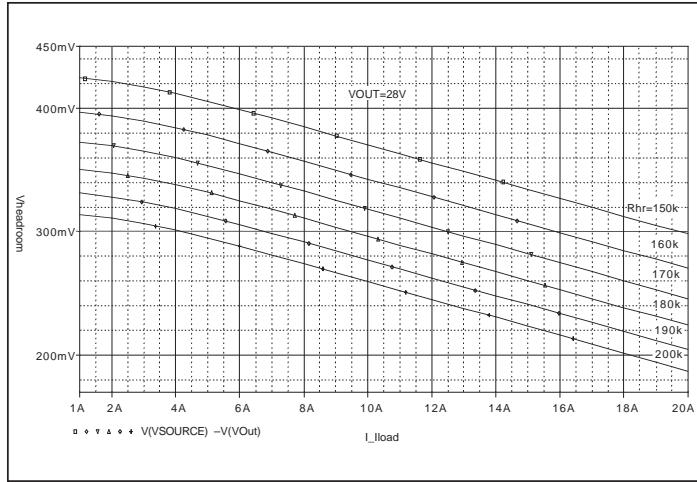


Figure 7—Headroom vs. load current at 28V output.

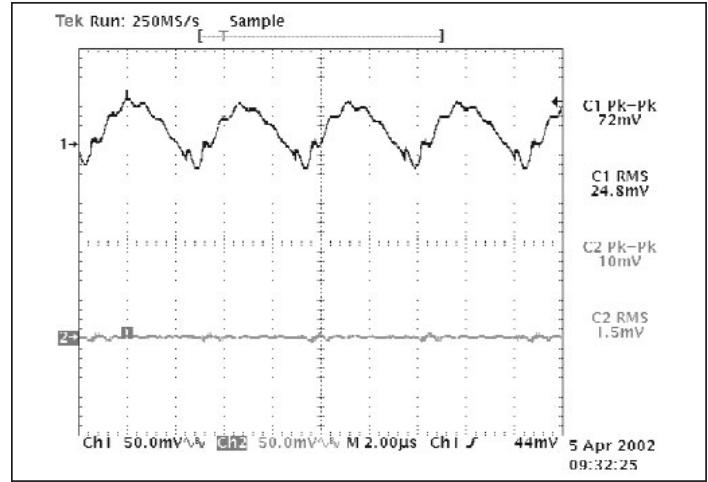


Figure 8—V375A28C600A and µRAM; Input and output ripple @50% (10A) load CH1=Vi; CH2=Vo; Vi-Vo=332mV; RHR=178k

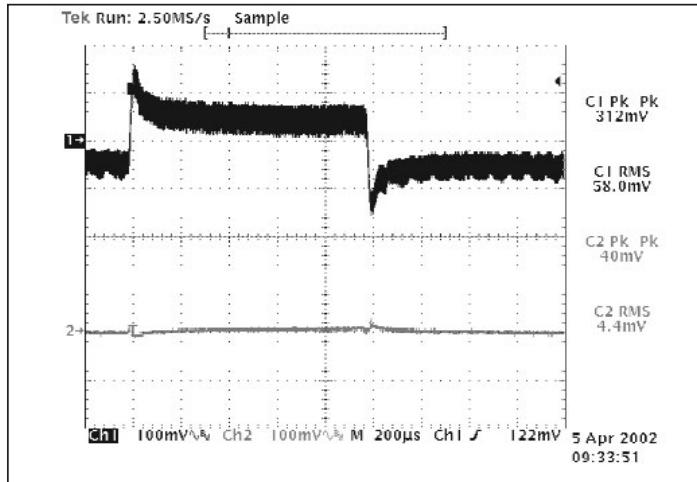


Figure 9—V375A28C600A and µRAM; Input and output dynamic response no added CTRAN; 20% of 20A rating load step of 4A (10A → 14A); RHR=178k (Configured as in Figs. 1 & 2)



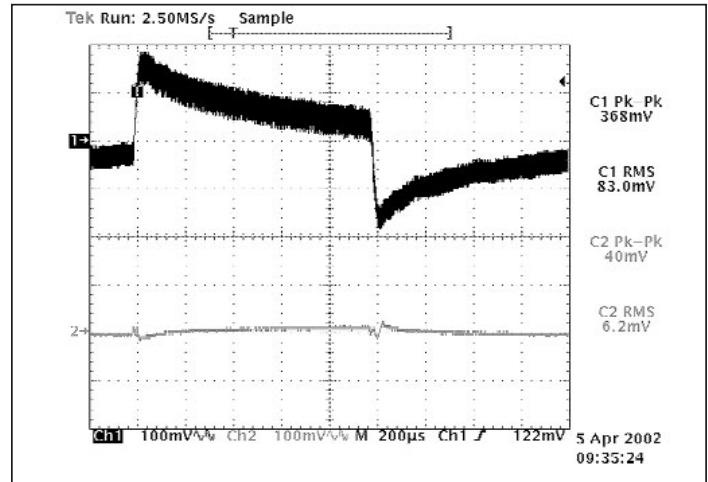



Figure 10—V375A28C600A and µRAM; Input and output dynamic response CTRAN=820µF Electrolytic; 32.5% of load step of 6.5A (10A → 16.5A); RHR=178k (Configured as in Figs. 1 & 2)

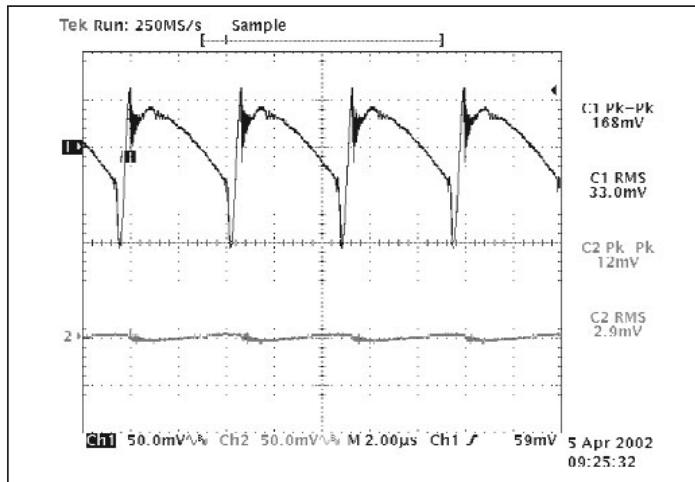


**Figure 11**—V375B12C250A and µRAM; Input and output ripple @50% (10A) load CH1=Vi; CH2=Vo; Vi-Vo=305mV; RHR=80k (Configured as in Figs. 1 & 2)

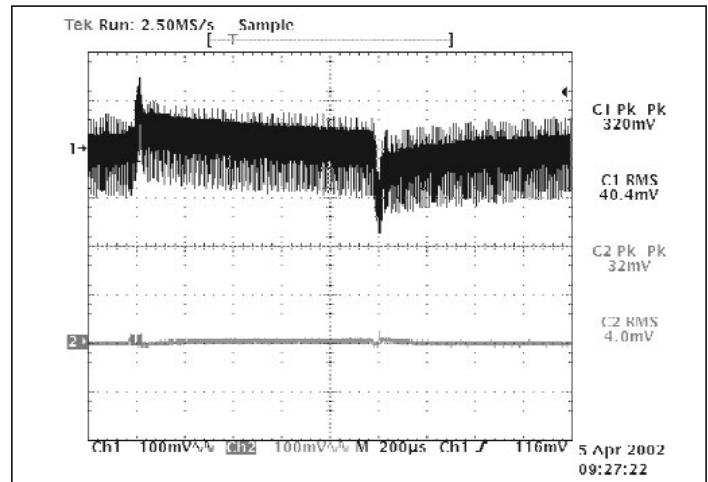


**Figure 12**—V300B12C250A and µRAM; Input and output dynamic response no added CTRAN; 17.5% of 20A rating load step of 3.5A (10A→13.5A); RHR=80k (Configured as in Figs. 1 & 2)

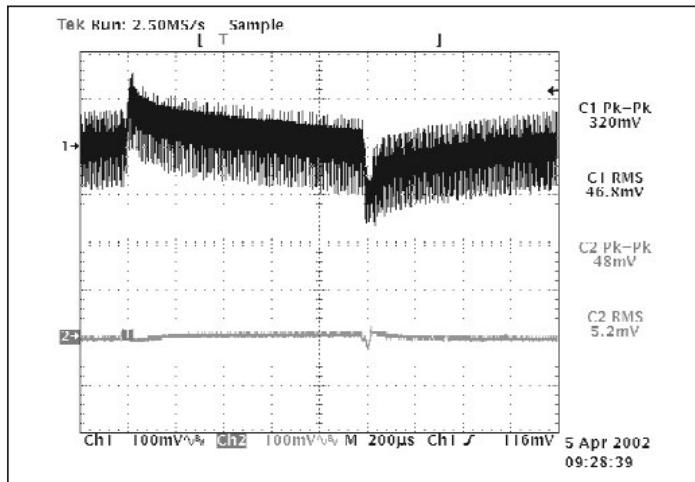


**Figure 13**—V300B12C250A and µRAM; Input and output dynamic response CTRAN=820μF Electrolytic; 30% of load step of 6A (10A→16A); RHR=80k (Configured as in Figs. 1 & 2)

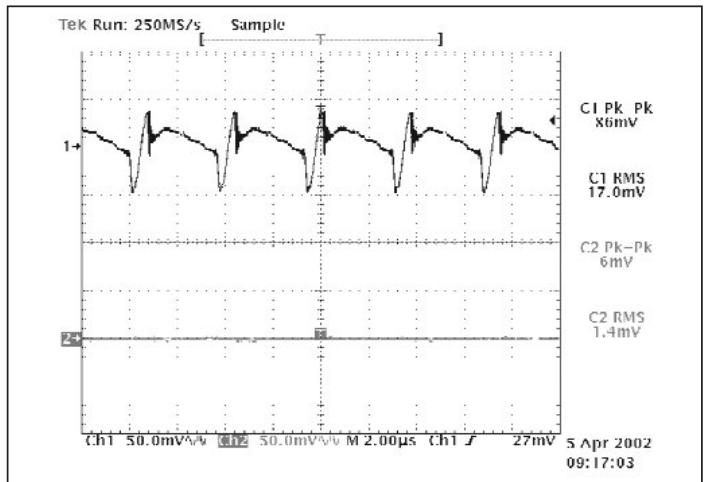

**Figure 14**—V48C5C100A and µRAM; Input and output ripple @50% (10A) load CH1=Vi; CH2=Vo; Vi-Vo=327mV; RHR=31k (Configured as in Figs. 1 & 2)

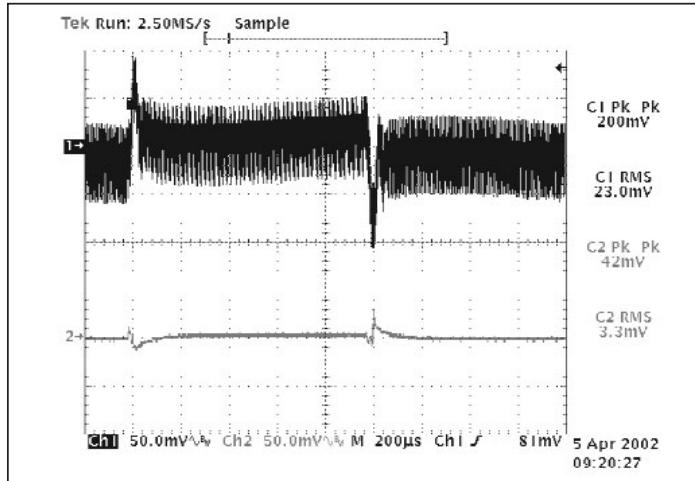

**Figure 15**—V48C5C100A and µRAM; Input and output dynamic response no added CTRAN; 22.5% of 20A rating load step of 4.5A (10A→14.5A); RHR=31k (Configured as in Figs. 1 & 2)

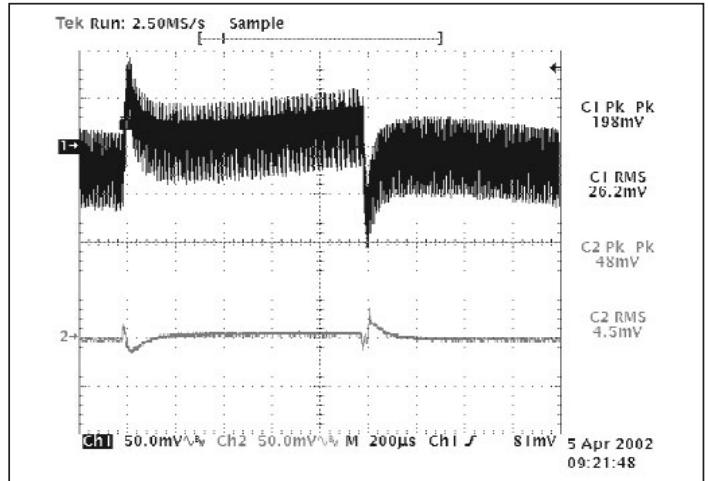

**Figure 16**—V48C5C100A and µRAM; Input and output dynamic response CTRAN=820μF Electrolytic; 35% of load step of 7A (10A→17A); RHR=31k (Configured as in Figs. 1 & 2)


# PRELIMINARY

## Mechanical Drawings

### MODULE OUTLINE

| uRAM Pins |           |       |
|-----------|-----------|-------|
| No.       | Function  | Label |
| 1         | +In       | +     |
| 2         | Control   | SC    |
| 3         | C ext.    | CTRAN |
| 4         | -In       | -     |
| 5         | -Out      | -     |
| 6         | Reference | Vref  |
| 7         | +Out      | +     |

Slotted (Style 1) or  
 Threaded (Style 2) 4-40 UNC-2B (6X)  
 or  
 Thru Hole (Style 3) #30 Drill Thru (6X)  
 (0.1285)

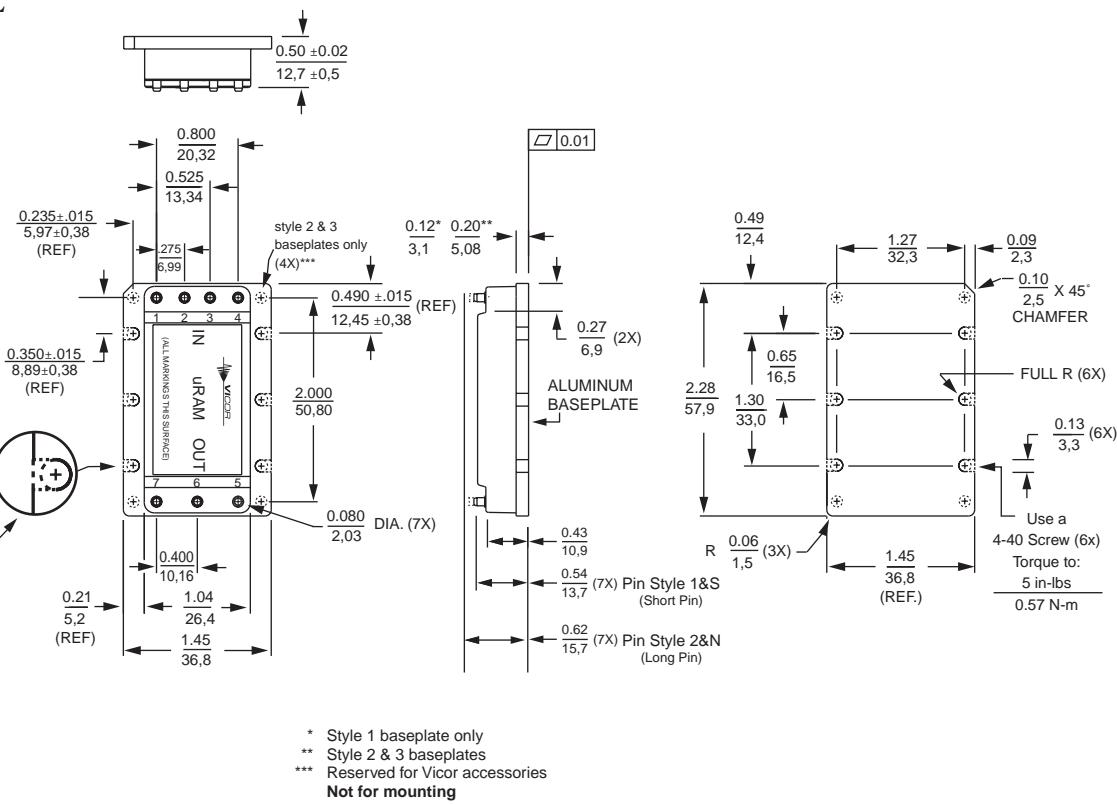

### PCB MOUNTING SPECIFICATIONS

