# bel

**ADSL Magnetics** 

Globespan

TM01367

- Designed to comply with the requirements of GR1089, UL1950, EN60950, BABT and CSA950 to provide a supplementary insulation barrier with a working voltage of 250V
- UL File Number E150991
- Minimum interwinding breakdown voltage of 1500 Vrms
- Operating and storage temperature range: -40° to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: shock, vibration, temperature cycling, temperature - humidity - bias

### **ELECTRICAL SPECIFICATIONS AT 25° C**


Part Number	Turns Ratio ±2%	Inductance¹ µH ±10%	Leakage Inductance µH max	Interwinding Capacitance	DCR Ω max		Harmonic Distortion <sup>2</sup> dB max
	Chip : Line	Line Side	Line Side	pF max	Chip Side	Line Side	+10 dBm 5 kHz
S560-6611-12	1 : 1.4	470	6	70	3.0	4.4	-60

All measurements are made with pins 2 and 3 connected and pins 6 and 7 connected

- 1. Inductance measured at 10 kHz, 0.1 Vac
- 2. Measurements made with  $100\Omega$  source and  $100\Omega$  load impedance

## **SCHEMATIC**

## S560-6611-12



©2001 Bel Fuse Inc. Specifications subject to change without notice. 09.01




TM01367

# **ADSL Magnetics**


Globespan

#### **MECHANICAL**

S560-6611-12

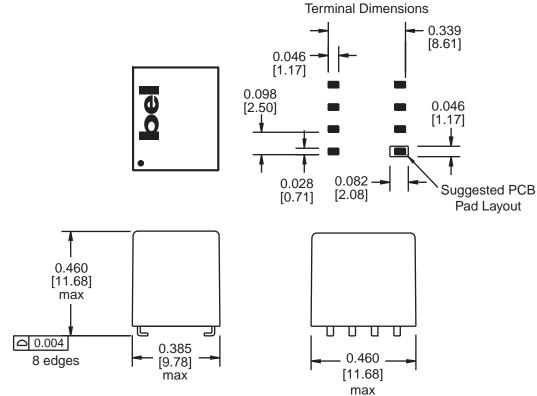

Dimensions are in inches [millimeters]. Standard dimension tolerance is  $\pm 0.005$  [0.13] unless otherwise noted.

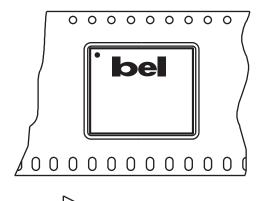

# Orientation of Component Inside Pocket

**User Feed Direction** 

#### Tape and Reel Packaging

32 mm wide by 16 mm pitch; 13 inch OD, 4 inch ID 300 components per reel, maximum Meets ANSI/EIA 481-2 Carrier Tape Standards

©2001 Bel Fuse Inc. Specifications subject to change without notice. 09.01

## **CORPORATE**

Bel Fuse Inc. 206 Van Vorst Street Jersey City, NJ 07302 Tel 201-432-0463 Fax 201-432-9542 www.belfuse.com

## FAR EAST

Bel Fuse Ltd. 8F / 8 Luk Hop Street San Po Kong Kowloon, Hong Kong Tel 852-2328-5515 Fax 852-2352-3706 www.belfuse.com

## **EUROPE**

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601

Fax 44-1772-888366 www.belfuse.com