

## **ELECTRICAL SPECIFICATIONS:**

NOTES

1.0 TURNS RATIO: (P6-P5-P4) : (J6-J3) (P3-P2-P1) : (J2-J1)

: 1CT : 1CT± 3% : 1CT : 1CT ± 3% 1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

2.0 INDUCTANCE: (P6-P4) (P3-P1)

: 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias : 350uH MIN. @ 0.1V, 100KHz, 8mA DC Bias

3.0 LEAKAGE INDUCTANCE: P6-P4 (WITH J6 AND J3 SHORT) P3-P1 (WITH J2 AND J1 SHORT)

: 0.3 MAX. @ 1MHz : 0.3 MAX. @ 1MHz

4.0 INTERWINDING CAPACITANCE: (P6,P5,P4) TO (J6,J3) (P3,P2,P1) TO (J2,J1)

: 30pf MAX @ 1MHz : 30pf MAX. @ 1MHZ

5.0 DC RESISTANCE: (J6-J3)=(J2-J1)

: 1.2 ohms Max.

**Bel Stewart Connector** 1118 Susquehanna Trail, South Glen Rock, Pa 17327-9199 717.234.7512

**MagJack®** 

http://www.stewartconnector.com

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

SHEET DRAWING NO. 1 OF 4

SI-40265

RECEIVE

6.0 RETURN LOSS: 1MHz TO 30MHz : 18dB MIN. : 12dB MIN.

60MHz TO 80MHz

NOTE: 100 OHMS CONNECTED TO (J2-J1) OR (J6-J3).

7.0 DIELECTRIC WITHSTAND: (J1, J2) TO (P1, P3) : 1500 VAC (J3, J6) TO (P4,P6) : 1500 VAC

8.0 INSERTION LOSS: RS=RL=100 ohms

100KHz TO 100MHz : 1.1 dB TYP

9.0 RISE TIME: RS=100 OHMS AND RL = 100 OHMS

OUTPUT VOLTAGE = 1 V peak: 3.0 nS MAX PULSE WIDTH= 112nS : 3.0 nS MAX

10.0 CROSS TALK: 1MHz TO 100MHz : 40 dB TYP

11.0 COMMON TO COMMON MODE ATTENUATION: 30MHz TO 100MHz : 35dB TYP

**Bel Stewart Connector** 11118 Susquehanna Trail, South Glen Rock, Pa. 17327-9199 717.234.7512

MagJack<sup>®</sup>


http://www.stewartconnector.com


THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.


SHEET DRAWING NO.


2 OF 4

SI - 40265







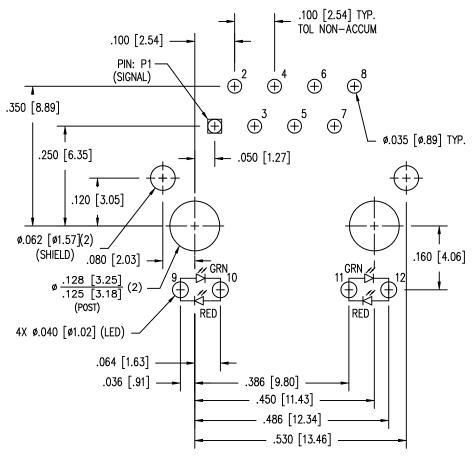

P.C.B. RECOMMENDED HOLE LAYOUT SEEN FROM COMPONENT SIDE TOLERANCE ±.003 [0.08] UNLESS OTHERWISE SPECIFIED (SCALE 4=1)

DRAWING NO.

## NOTES:

1. CONNECTOR MATERIALS:

HOUSING: THERMOPLASTIC UL94 V-O CONTACT/SHIELD: COPPER ALLOY SHIELD PLATING: NICKEL OR TIN CONTACT PLATING: SELECTIVE GOLD.

50 MICRO-INCHES MIN. IN CONTACT AREA.

- 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE USER THE ABILITY TO HAVE REASONABLE JACK/PANEL CLEARANCES, YET MAINTAIN GROUNDING CAPABILITY.
- 5. WAVE SOLDER COMPATIBLE PREHEAT 125°C/90SECS.

CT720034X1/24-0307

LED SPECIFICATION			
STANDARD LED	WAVELENGTH	* Forward V (MAX)	(TYP)
GREEN	565 nm	2.5 V	2.2 V
RED	625 nm	2.5 V	2.0 V

\*WITH A FORWARD CURRENT OF 20 mA

Bel Stewart Connector 11118 Susquehenne Trell, South Glen Rock, Pa. 17327-9199 717-234.7512

**MagJack®** 


http://www.stewartconnector.com


STEWART SHEET
3 OF 4

SI-40265

55 <sup>rev.</sup>01

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

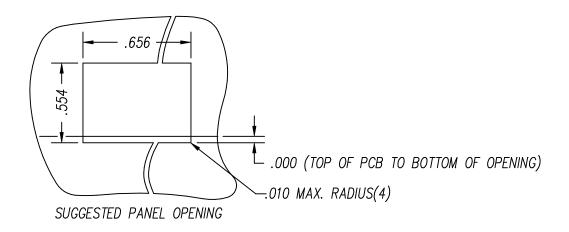



CT720034X1/24-0307

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONTENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.

Bell Stewart Connector 11118 Susqueherne Trail, South Glen Rock, Pa. 17327-9199 717.234.7512 **MagJack®** 

http://www.stewartconnector.com

SHEET 4 OF 4 DRAWING NO.

SI-40265

5 **REV.**O 1