

57-21SYGC/S530-XX/TR8

Features

- Fluorescence Type
- High Luminous Intensity
- High Efficiency
- Pb-free.
- The product itself will remain with RoHS compliant version



Descriptions

The 57-21series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

Applications

- OA Equipment
- Backlighting of Full Color LCD
- Replacement of Conventional Light Bulbs and Fluorescent Lamps

Device Selection Guide

Chip	F. 24. 1.C.1.	Resin Color	
Material	Emitted Color		
AlGaInP	Brilliant Yellow Green	Water Clear	


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 1 of 10

Device No.: DSE-0003304 Prepared date:27-Mar-2009 Prepared by:Rita Shen



57-21SYGC/S530-XX/TR8

Package Dimensions

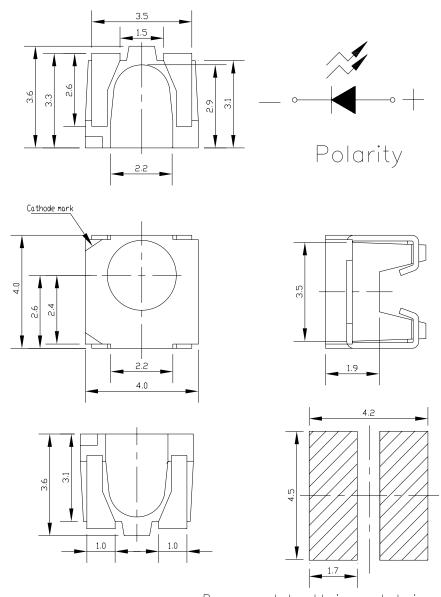

Recommended soldering pad design

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No.: DSE-0003304

http://www.everlight.com

Prepared date:27-Mar-2009

Rev. 1

Page: 2 of 10



<u>57-21SYGC/S530-XX/TR8</u>

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~+100	$^{\circ}\! \mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering : 260 °C Hand Soldering : 350 °C	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 3 of 10

Device No.: DSE-0003304 Prepared date:27-Mar-2009 Prepared by:Rita Shen



57-21SYGC/S530-XX/TR8

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	*Chip Rank	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	E3	32	51				
		E4	41	61		mcd	I _F =20mA	
		E5	53	73				
Viewing Angle	2 \theta 1/2			120		deg	I _F =20mA	
Peak Wavelength	λр			575		nm	I _F =20mA	
Dominant Wavelength	λd			573		nm	I _F =20mA	
Spectrum Radiation Bandwidth	Δλ			20		nm	I _F =20mA	
Forward Voltage	VF		1.7	2.0	2.4	V	I _F =20mA	
Reverse Current	Ir				10	μ A	VR=5V	

*57-21SYGC/S530-XX/TR8

Chip Rank

Everlight Electronics Co., Ltd. Device No.: DSE-0003304

http://www.everlight.com Prepared date:27-Mar-2009 Rev. 1

Page: 4 of 10





EVERLIGHT ELECTRONICS CO., LTD.


Technical Data Sheet Side View Red SMD LEDs


57-21SYGC/S530-XX/TR8


Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd.

Device No.: DSE-0003304

http://www.everlight.com

Prepared date:27-Mar-2009

Rev. 1

Page: 5 of 10




57-21SYGC/S530-XX/TR8

Label Explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

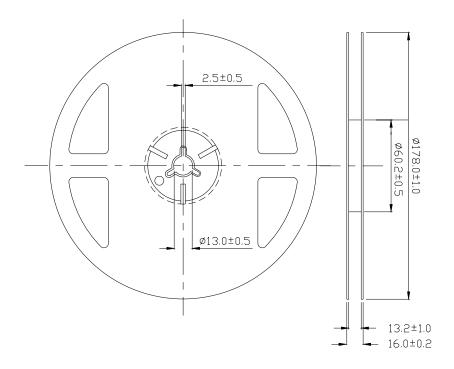

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Everlight Electronics Co., Ltd. Device No.: DSE-0003304

http://www.everlight.com

Prepared date:27-Mar-2009


Rev. 1

Page: 6 of 10




57-21SYGC/S530-XX/TR8

Carrier Tape Dimensions: Loaded Quantity 500 pcs Per Reel.

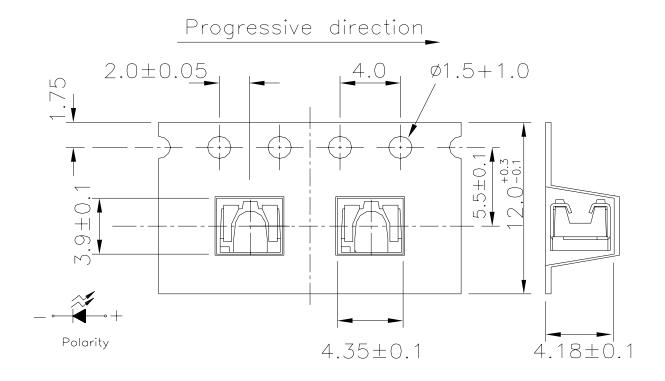

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

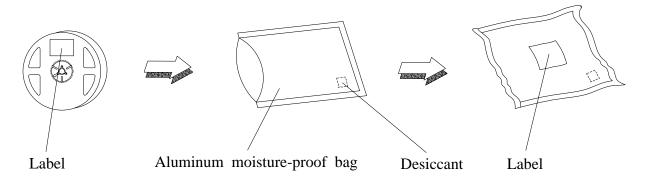

Everlight Electronics Co., Ltd.

Device No.: DSE-0003304

http://www.everlight.com Prepared date:27-Mar-2009 Rev. 1

Page: 7 of 10



57-21SYGC/S530-XX/TR8

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycle s	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Max. 10 sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°ℂ	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd.

Device No.: DSE-0003304

http://www.everlight.com

Prepared by:Rita Shen

Rev. 1

Prepared date:27-Mar-2009

Page: 8 of 10



57-21SYGC/S530-XX/TR8


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life are 168 hours under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
 - 3. Soldering Condition ~5 °C / Sec.

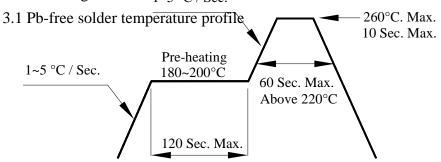

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Device No.: DSE-0003304

http://www.everlight.com

Prepared date:27-Mar-2009

Rev. 1

Page: 9 of 10




57-21SYGC/S530-XX/TR8

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

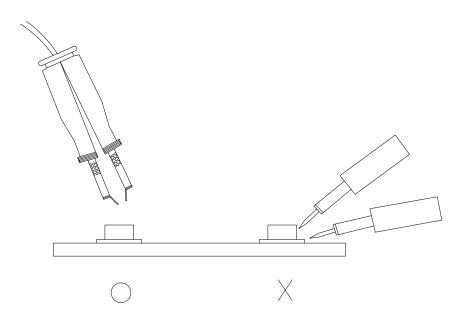

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1 Page: 10 of 10

Device No.: DSE-0003304 Prepared date:27-Mar-2009 Prepared by:Rita Shen