


## Pletronics, Inc.

19013 36th Ave. W, Suite H • Lynnwood, WA 98036 USA **Manufacturer of High Quality Frequency Control Products** 

# SQ3345, SQ2245 CMOS Series

- SQ3345: CMOS with Enable/ Disable, SQ2245 without Enable/Disable
- Lower Ringing Noise Option Available to Reduce EMI
- Half Size (8 Pin DIP) Metal Clock Oscillator
- Available in Thru-Hole or Surface Mount Configuration



650 kHz - 69.999 MHz

### Standard Specifications

**Overall Frequency Stability** ± 50 PPM, ± 25 PPM, ± 20 PPM over Operating Temperature Range **Operating Temperature Range** 

0 to +70°C is standard, but can be extended to -40 to +85°C for certain frequencies

Supply Voltage (Vcc)

5.0 volts and 3.3 volts available

Symmetry (Duty Cycle)

40/60 to 60/40% is standard, but 45/55% at 50% of Vcc is also available (see Waveform 1)

**Logic Levels** 

Logic "1" 90% of Vcc MIN; Logic "0" 10% of Vcc MAX

**Output Load Ringing Noise** 

(E/D)

Standard load is 15 pF (typ. 1 ASIC) maximum, see Test Circuit 3 (consult factory for heavier loads)

Depends on frequency and output load. See EMI application note


SQ33: Enable/Disable Option

Output enabled when Pin #1 is open or at Logic "1"; Output disabled when Pin #1 is at Logic "0".

	Frequency Range (MHz)	Max. Supply Current Icc (mA) w/ 15pF load		Rise and Fall Time Tr & Tf (nS) w/ 15pF load	
		3.3V	5.0V	Typical	Maximum
	0.650 - 10.000	7	10	3.0	4.0
	10.001 - 25.999	10	20	2.5	3.5
	26.000 - 34.999	15	25	2.5	3.5
	35.000 - 50.000	20	30	2.5	3.5
	50.001 - 69.999	25	35	2.5	3.5

#### Part Numbering Guide

Portions of the part number that appear after the frequency may not be marked on part (C of C provided)

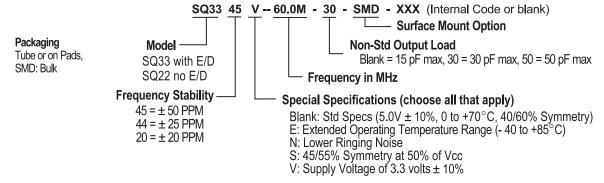

Consult factory for available frequencies and specs. Not all options available for all frequencies. A special part number may be assigned. Frequency Stability is inclusive of frequency shifts due to calibration, temperature, supply voltage, shock, vibration and load

#### Mechanical: inches (mm)

#### not to scale

#### **Surface Mount**

Due to part size and factory abilities, part marking may vary from lot to lot and may contain our part number or an internal code.

