


ELECTRONIC / GLASS FUSES

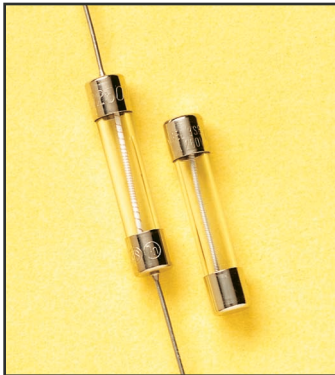

GGC / GGC-V


Glass Body
Fast Acting
1/4" x 1-1/4"
1-1/2" Axial Leads Optional

1/100A through 10A, 250VAC - UL Listed and CSA Certified
12A and 15A, 125VAC - UL Listed and CSA Certified
20A through 30A, 32VAC - UL Listed and CSA Certified

Standard Fuse Ampere Ratings

CATALOG NUMBER	AXIAL LEAD CAT. NO	AMPERE RATING	VOLTS	I.R.
GGC1/100	GGC-V1/100	1/100A	250V	1
GGC1/32	GGC-V1/32	1/32A	250V	1
GGC1/16	GGC-V1/16	1/16A	250V	1
GGC1/10	GGC-V1/10	1/10A	250V	1
GGC1/8	GGC-V1/8	1/8A	250V	1
GGC15/100	GGC-V15/100	15/100A	250V	1
GGC175/1000	GGC-V175/1000	175/1000A	250V	1
GGC3/16	GGC-V3/16	3/16A	250V	1
GGC2/10	GGC-V2/10	2/10A	250V	1
GGC1/4	GGC-V1/4	1/4A	250V	1
GGC3/10	GGC-V3/10	3/10A	250V	1
GGC3/8	GGC-V3/8	3/8A	250V	1
GGC4/10	GGC-V4/10	4/10A	250V	2
GGC1/2	GGC-V1/2	1/2A	250V	1
GGC6/10	GGC-V6/10	6/10A	250V	1
GGC3/4	GGC-V3/4	3/4A	250V	1
GGC8/10	GGC-V8/10	8/10A	250V	2
GGC1	GGC-V1	1A	250V	1
GGC1-1/4	GGC-V1-1/4	1-1/4A	250V	3
GGC1-1/2	GGC-V1-1/2	1-1/2A	250V	3
GGC1-3/4	GGC-V1-3/4	1-3/4A	250V	3
GGC1-6/10	GGC-V1-6/10	1-6/10A	250V	3
GGC2	GGC-V2	2A	250V	3
GGC2-1/4	GGC-V2-1/4	2-1/4A	250V	3
GGC2-1/2	GGC-V2-1/2	2-1/2A	250V	3
GGC3	GGC-V3	3A	250V	3
GGC3-2/10	GGC-V3-2/10	3-2/10A	250V	4
GGC4	GGC-V4	4A	250V	2
GGC5	GGC-V5	5A	250V	2
GGC6	GGC-V6	6A	250V	2
GGC6-3/10	GGC-V6-3/10	6-3/10A	250V	2
GGC7	GGC-V7	7A	250V	2
GGC7-1/2		7-1/2A	250V	2
GGC8	GGC-V8	8A	250V	2
GGC10	GGC-V10	10A	250V	2
GGC12	GGC-V12	12A	125V	5
GGC15	GGC-V15	15A	125V	5
GGC20	GGC-V20	20A	32V	6
GGC25	GGC-V25	25A	32V	6
GGC30	GGC-V30	30A	32V	6

1. 250VAC @ 35A I.R./125VAC @ 10kA I.R.
2. 250VAC @ 200A I.R./125VAC @ 10kA I.R.
3. 250VAC @ 100A I.R./125VAC @ 10kA I.R.
4. 250VAC @ 10kA I.R.
5. 125VAC @ 10kA I.R.
6. 32VAC @ 300A I.R.

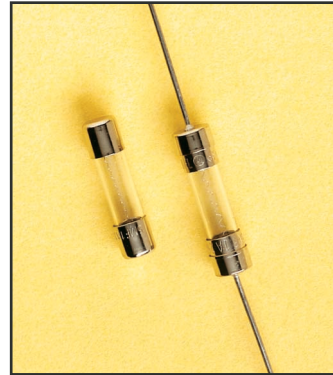

GGM / GGM-V

Glass Body
Fast Acting
5mm x 20mm
1-1/2" Axial Leads Optional

1/10A through 3A, 250VAC - UL Listed and CSA Certified
4A through 8A, 125VAC - UL Listed and CSA Certified
10A and 15A, 250VAC - UL Recognized

Standard Fuse Ampere Ratings

CATALOG NUMBER	AXIAL LEAD CAT. NO	AMPERE RATING	VOLTS	I.R.
GGM1/16	GGM-V1/16	1/16A	250V	2
GGM1/10	GGM-V1/10	1/10A	250V	1
GGM1/8	GGM-V1/8	1/8A	250V	1
GGM2/10	GGM-V2/10	2/10A	250V	1
GGM1/4	GGM-V1/4	1/4A	250V	1
GGM3/10	GGM-V3/10	3/10A	250V	1
GGM4/10	GGM-V4/10	4/10A	250V	1
GGM1/2	GGM-V1/2	1/2A	250V	1
GGM6/10	GGM-V6/10	6/10A	250V	1
GGM7/10	GGM-V7/10	7/10A	250V	1
GGM3/4	GGM-V3/4	3/4A	250V	3
GGM8/10	GGM-V8/10	8/10A	250V	1
GGM1	GGM-V1	1A	250V	1
GGM1-2/10		1-2/10A	250V	2
GGM1-1/4	GGM-V1-1/4	1-1/4A	250V	2
GGM1-1/2	GGM-V1-1/2	1-1/2A	250V	3
GGM1-6/10	GGM-V1-6/10	1-6/10A	250V	2
GGM2	GGM-V2	2A	250V	2
GGM2-1/2	GGM-V2-1/2	2-1/2A	250V	2
GGM3	GGM-V3	3A	250V	2
GGM4	GGM-V4	4A	125V	4
GGM5	GGM-V5	5A	125V	4
GGM6	GGM-V6	6A	125V	4
GGM7	GGM-V7	7A	125V	4
GGM8	GGM-V8	8A	125V	4
GGM10	GGM-V10	10A	250V	5
GGM15	GGM-V15	15A	250V	5

1. 250VAC @ 35A I.R./125VAC @ 10kA I.R.
2. 250VAC @ 100A I.R./125VAC @ 10kA I.R.
3. 250VAC @ 200A I.R./125VAC @ 10kA I.R.
4. 125VAC @ 10kA I.R.
5. 250VAC @ 100A I.R.