
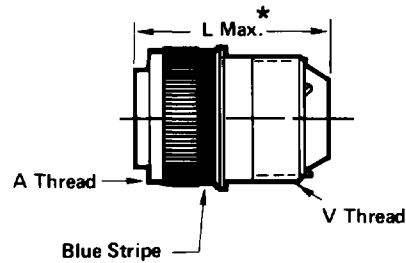



MS3459 CINCH M59

Plug, rear release, crimp contacts, self-locking, coupling.

Dimensions (inches)

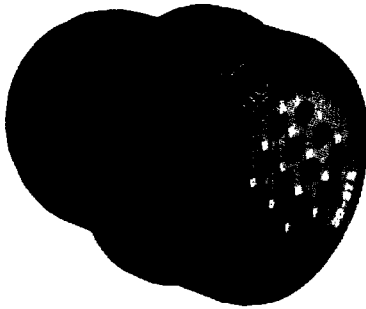

Shell Size	A Thread Class 2B	L* Max.	Q Max.	V Thread Class 2A
10S	5/8-24 UNEF	1.925	1.088	5/8-24 UNEF
10SL	5/8-24 UNEF	1.925	1.088	5/8-24 UNEF
12S	3/4-20 UNEF	1.925	1.213	3/4-20 UNEF
12	3/4-20 UNEF	1.925	1.213	3/4-20 UNEF
14S	7/8-20 UNEF	1.925	1.358	7/8-20 UNEF
14	7/8-20 UNEF	1.925	1.258	7/8-20 UNEF
16S	1-20 UNEF	1.925	1.463	1-20 UNEF
16	1-20 UNEF	1.925	1.463	1-20 UNEF
18	1-1/8-18 UNEF	1.925	1.588	1-1/16-18 UNEF
20	1-1/4-18 UNEF	1.950	1.713	1-3/16-18 UNEF
22	1-3/8-18 UNEF	1.950	1.788	1-5/16-18 UNEF
24	1-1/2-18 UNEF	1.950	1.963	1-7/16-18 UNEF
28	1-3/4-18 UNS	1.950	2.213	1-3/4-18 UNS
32	2-18 UNS	1.950	2.463	2-18 UNS
36	2-1/4-16 UN	1.950	2.713	2-1/4-16 UN
40	2-1/2-16 UN	1.950	2.963	2-1/2-16 UN

* Add .445 for size no. 0 contacts.

Dimensions subject to change without notice.