


液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

www.DataSheet4U.com

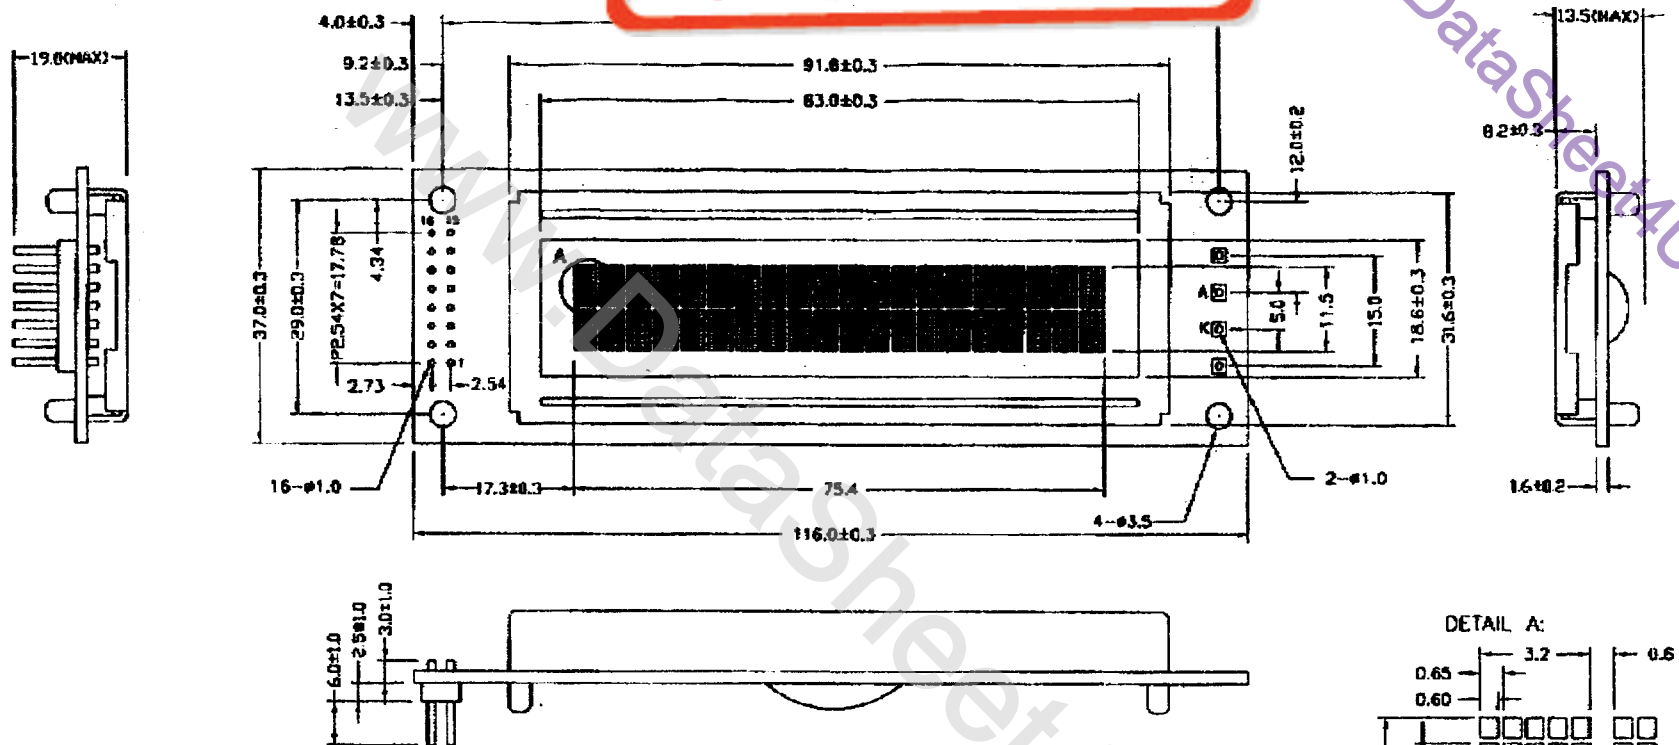

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

- NOTES:
- 1.DISPLAY TYPE: STN/YELLOW-GREEN MODE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSMISSIVE/POSITIVE
 - 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 - 5.LCD OPERATING VOLTAGE: 4.7V
 - 6.OPERATING TEMP: 0°C-+50°C
 - 7.STORAGE TEMP: -20°C-+60°C
 - 8.LED BACKLIGHT
 - 9.CONTROLLER: KS0066UP-00
 - 10.WITH CONNECTOR
 - 11.UNMARKED TOLERANCE: ±0.3mm
 - 12.BEZEL IS TO BE PAINED BLACK

TIAN-MA MICROELECTRONICS CO.
 6/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN BY: 潘君 2009	TITLE: TM202LBF7		
CHECKED BY: 潘君 2009	DWG NO: G-2		SCALE:
APPROVED BY: 潘君 2009	DWG NAME: TM202LBF7G-2		UNIT: mm
CONFIRMED BY: 潘君 2009	DWG NO: G-2		SHEET NO: 1 OF 1

www.DataSheet4U.com