



### 1. CONFIGURATION & DIMENSIONS :

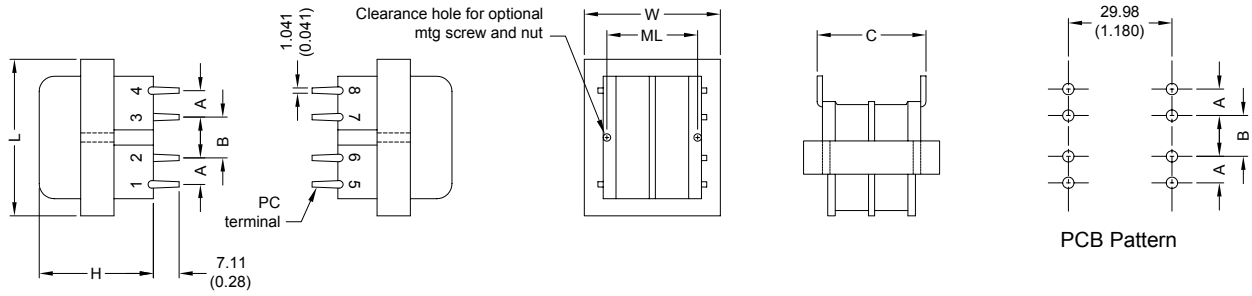

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
2	1.1	35.50 (1.40)	30.00 (1.180)	24.00 (0.95)	----	6.35 (.250)	6.35 (.250)	30.48 (1.200)	None	73

### 2. SCHEMATIC :



### 3. ELECTRICAL CHARACTERISTICS ( @ 25°C ) :

a. Primary Voltage	AC 115/230 V 50/60 Hz .
b. No Load Primary Current	Less Than 10mA .
Input AC 115V 60Hz .	Less Than 10mA .
Input AC 230V 50Hz .	Series AC 138.00V .
c. Secondary Voltage (±5%)	Parallel AC 69.00V .
d. Secondary Load Current	Series 0.015A .
	Parallel 0.03A .
e. Full Load Primary Current	Less Than 15mA .
Input AC 115V 60Hz .	Less Than 20mA .
Input AC 230V 50Hz .	Series 88.00V .
f. Full Load Secondary Voltage (±5%)	Parallel 44.00V .
g. DC Resistance	Primary = 2236 Ohm .
Pin 1-2	= 3016 Ohm .
Pin 3-4	Secondary = - Ohm .
Pin 5-6	= - Ohm .
Pin 7-8	DC 500V 100Meg Ohm Of More .
h. Insulation Resistance	AC 2500V 60Hz 1 Minutes .
i. Withstand Voltage (Hi-Pot)	Less Than 60 Deg C .
j. Temperature Rise	EI-35 x 7.00 m/m .
k. Core Size	



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**