


表面安装肖特基二极管  
反向电压 20 --- 100 V  
正向电流 1.0 A

Surface Mount Schottky Barrier Rectifier  
Reverse Voltage 20 to 100 V  
Forward Current 1.0 A

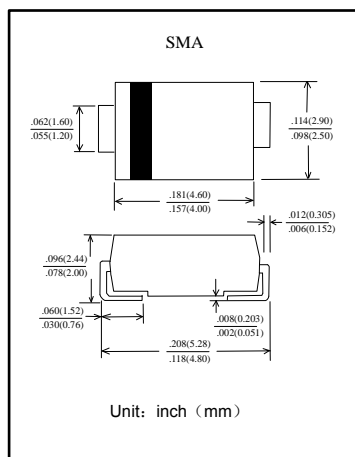

### 特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 0.375" (9.5mm)引线长度。  
260°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。5 lbs. (2.3kg) tension
- 引线 and 管体皆符合RoHS标准。  
Lead and body according with RoHS standard

### 机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	SS12A	SS14A	SS16A	SS110A	单位 Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	20	40	60	100	V
最大反向有效值电压 Maximum RMS voltage	$V_{R(RMS)}$	14	28	42	70	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	20	40	60	100	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{FM}$	1.0				A
最大正向电压降 IF = 1.0A Maximum forward voltage	$V_F$	0.50		0.7	0.85	V
正向峰值浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	30				A
最大反向漏电流 TA = 25°C Maximum reverse current TA = 100°C	$I_R$	0.5		10		mA
典型热阻 Typical thermal resistance	$R_{\theta JA}$	88				°C/W
典型结电容 VR = 4.0V f = 1.0MHz Type junction capacitance	$C_j$	15				pF
工作结温 Operating junction	$T_j$	-55 --- +125		-55 --- +150		°C
存储温度 Storage temperature range	$T_{STG}$	-55 --- +150				°C

特性曲线 Characteristic Curves

