

ULTRA HIGH SPEED SWITCHING APPLICATION.

### FEATURES


- Low Forward Voltage.
- Fast Reverse Recovery Time.
- Small Total Capacitance.

### MAXIMUM RATING (Ta=25 °C)


CHARACTERISTIC	SYMBOL	RATING	UNIT
Maximum (Peak) Reverse Voltage	$V_{RM}$	85	V
Reverse Voltage	$V_R$	80	V
Maximum (Peak) Forward Current	$I_{FM}^*$	300	mA
Average Forward Current	$I_O^*$	100	mA
Surge Current (10ms)	$I_{FSM}^*$	2	A
Power Dissipation	$P_D^{**}$	900	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ 150	°C

\* : Unit Rating. (Total Rating=Unit Rating × 1.5)

\*\* : Total rating, Package mounted on a ceramic board (600mm<sup>2</sup> × 0.8mm)

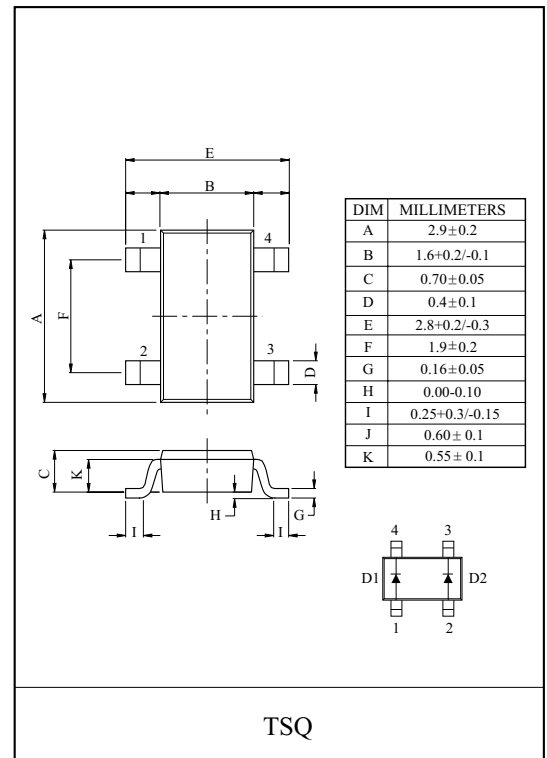

### Marking

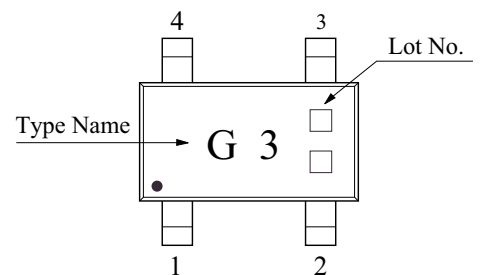

### ELECTRICAL CHARACTERISTICS (Ta=25 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	$V_{F(1)}$	$I_F=1mA$	-	0.60	-	V
	$V_{F(2)}$	$I_F=10mA$	-	0.72	-	
	$V_{F(3)}$	$I_F=100mA$	-	0.90	1.20	
Reverse Current	$I_R$	$V_R=80V$	-	-	0.5	μA
Total Capacitance	$C_T$	$V_R=0, f=1MHz$	-	0.9	3.0	pF
Reverse Recovery Time	$t_{rr}$	$I_F=10mA$	-	1.6	4.0	nS




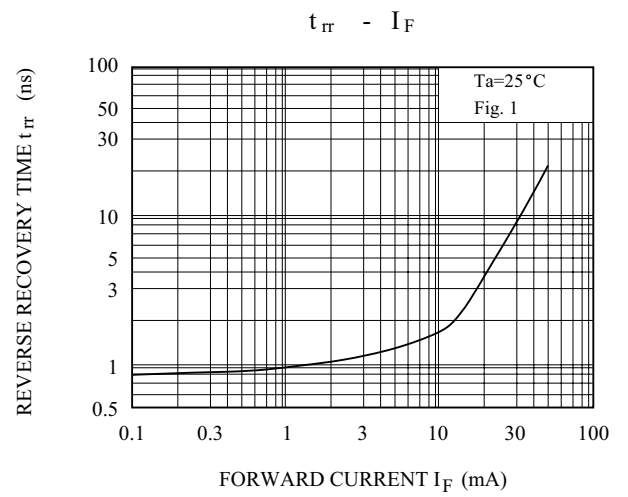


Fig. 1. REVERSE RECOVERY TIME( $t_{rr}$ ) TEST CIRCUIT

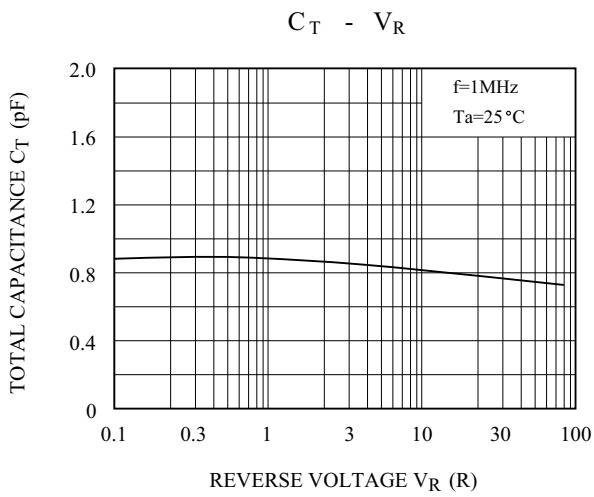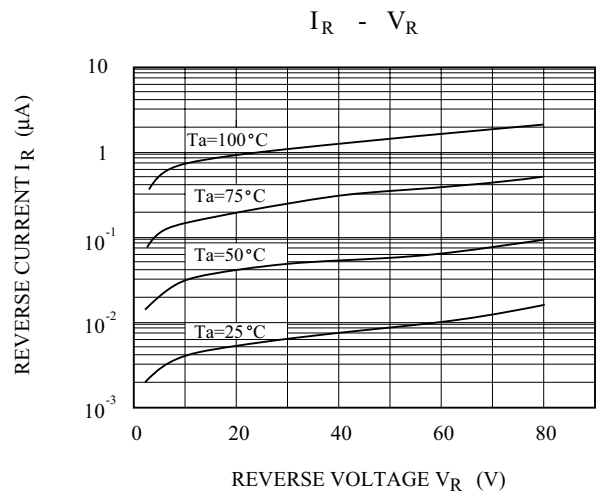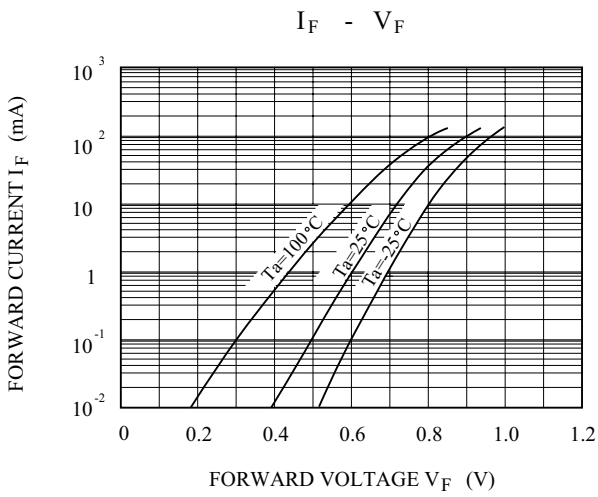