




## ▼ Simple Drive Requirement

## ▼ Lower Gate Charge

## ▼ Fast Switching Performance

## ▼ RoHS Compliant &amp; Halogen-Free

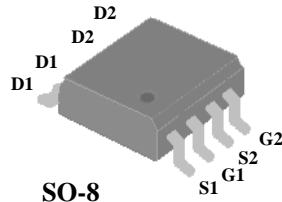


N-CH	$BV_{DSS}$	20V
	$R_{DS(ON)}$	11.5mΩ
	$I_D$	10.4A
P-CH	$BV_{DSS}$	-20V
	$R_{DS(ON)}$	23mΩ
	$I_D$	-7.5A

**Description**

AP4539 series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The SO-8 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for voltage conversion or switch applications.

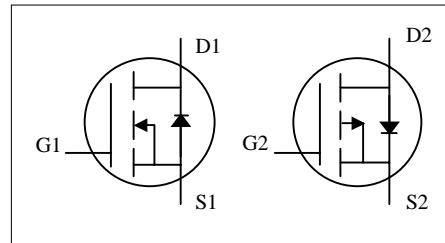**Absolute Maximum Ratings**

Symbol	Parameter	Rating		Units
		N-channel	P-channel	
$V_{DS}$	Drain-Source Voltage	20	-20	V
$V_{GS}$	Gate-Source Voltage	$\pm 16$	$\pm 12$	V
$I_D @ T_A = 25^\circ C$	Continuous Drain Current <sup>3</sup>	10.4	-7.5	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current <sup>3</sup>	8.3	-6	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	30	-30	A
$P_D @ T_A = 25^\circ C$	Total Power Dissipation	2		W
$T_{STG}$	Storage Temperature Range	-55 to 150		°C
$T_J$	Operating Junction Temperature Range	-55 to 150		°C

**Thermal Data**

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Maximum Thermal Resistance, Junction-ambient <sup>3</sup>	62.5	°C/W


**N-CH Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	20	-	-	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=9\text{A}$	-	9.1	11.5	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=5\text{A}$	-	10.2	13.5	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	0.3	0.75	1.2	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=9\text{A}$	-	33	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=16\text{V}, V_{\text{GS}}=0\text{V}$	-	-	10	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm 16\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	nA
$Q_g$	Total Gate Charge	$I_{\text{D}}=9\text{A}$	-	16	25.6	nC
$Q_{\text{gs}}$	Gate-Source Charge		-	2	-	nC
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge		-	5.5	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DS}}=10\text{V}$	-	6	-	ns
$t_r$	Rise Time		-	20	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time		-	31	-	ns
$t_f$	Fall Time		-	19	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	1350	2160	pF
$C_{\text{oss}}$	Output Capacitance		-	180	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		-	160	-	pF
$R_g$	Gate Resistance	$f=1.0\text{MHz}$	-	2.3	4.6	$\Omega$

**Source-Drain Diode**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_s=1.7\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_s=9\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	22	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge		-	14	-	nC

**P-CH Electrical Characteristics @  $T_j=25^\circ\text{C}$  (unless otherwise specified)**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=-250\mu\text{A}$	-20	-	-	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=-4.5\text{V}, I_{\text{D}}=-7\text{A}$	-	18.3	23	$\text{m}\Omega$
		$V_{\text{GS}}=-2.5\text{V}, I_{\text{D}}=-4\text{A}$	-	22.9	30	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=-250\mu\text{A}$	-0.3	-0.6	-1.2	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-10\text{V}, I_{\text{D}}=-7\text{A}$	-	30	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=-16\text{V}, V_{\text{GS}}=0\text{V}$	-	-	-10	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=\pm 12\text{V}, V_{\text{DS}}=0\text{V}$	-	-	$\pm 100$	$\text{nA}$
$Q_g$	Total Gate Charge	$I_{\text{D}}=-7\text{A}$	-	28	44.8	$\text{nC}$
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=-10\text{V}$	-	3	-	$\text{nC}$
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	9	-	$\text{nC}$
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DS}}=-10\text{V}$	-	9	-	ns
$t_r$	Rise Time	$I_{\text{D}}=-1\text{A}$	-	26	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_{\text{G}}=3.3\Omega$	-	100	-	ns
$t_f$	Fall Time	$V_{\text{GS}}=-5\text{V}$	-	56	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	2450	3920	$\text{pF}$
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=-10\text{V}$	-	320	-	$\text{pF}$
$C_{\text{rss}}$	Reverse Transfer Capacitance	$f=1.0\text{MHz}$	-	300	-	$\text{pF}$
$R_g$	Gate Resistance	$f=1.0\text{MHz}$	-	4	8	$\Omega$

**Source-Drain Diode**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_{\text{S}}=-1.7\text{A}, V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_{\text{S}}=-7\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	45	-	ns
			-	31	-	nC

**Notes:**

1. Pulse width limited by Max. junction temperature.
2. Pulse test
3. Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board ; 135 °C/W when mounted on Min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.


APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.


# AP4539GM-HF




## N-Channel

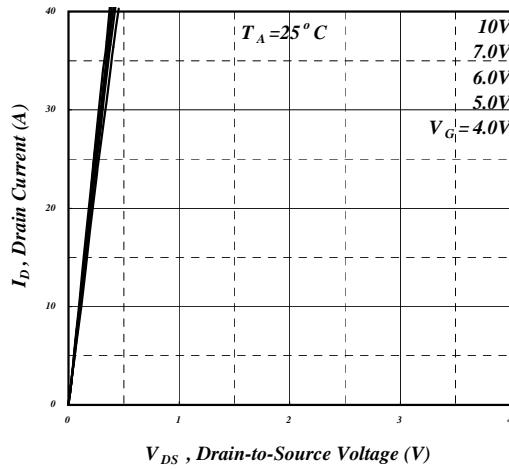


**Fig 1. Typical Output Characteristics**

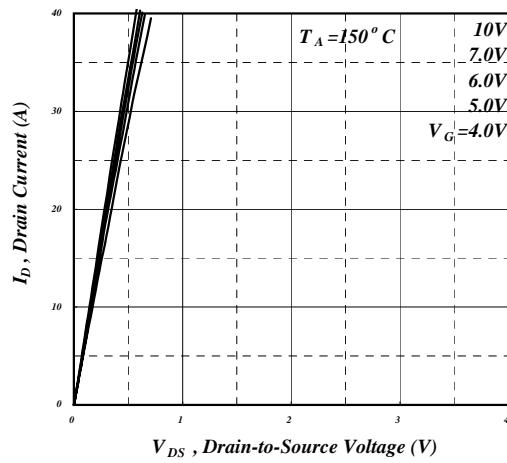


**Fig 2. Typical Output Characteristics**

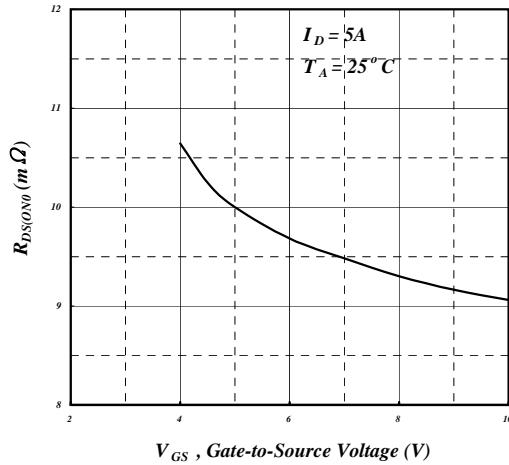


**Fig 3. On-Resistance v.s. Gate Voltage**

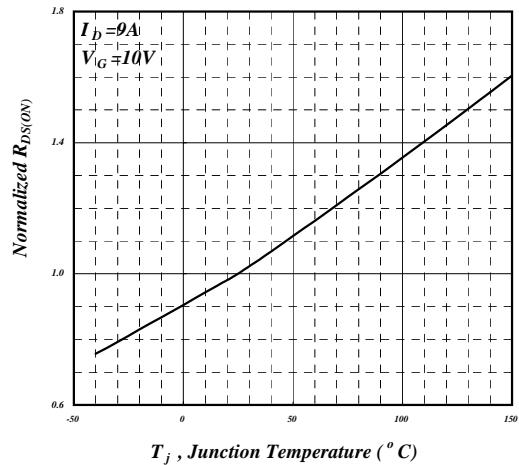

**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

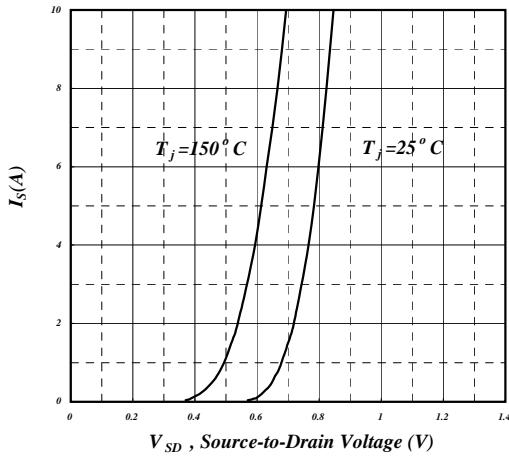

**Fig 5. Forward Characteristic of Reverse Diode**

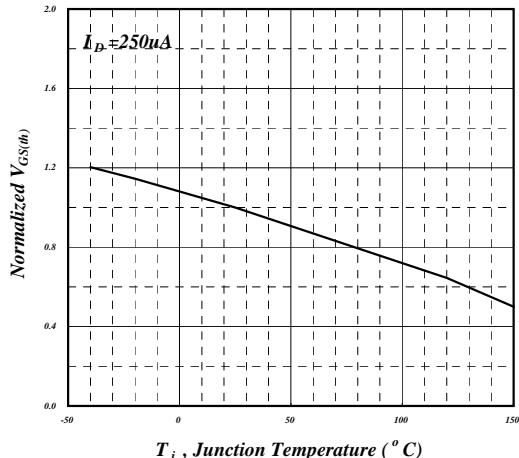

**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**



## N-Channel

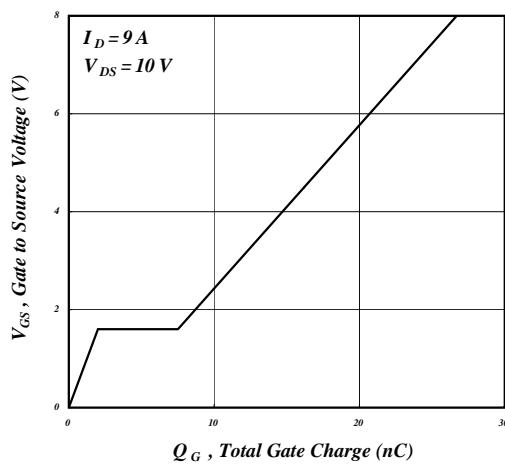


Fig 7. Gate Charge Characteristics

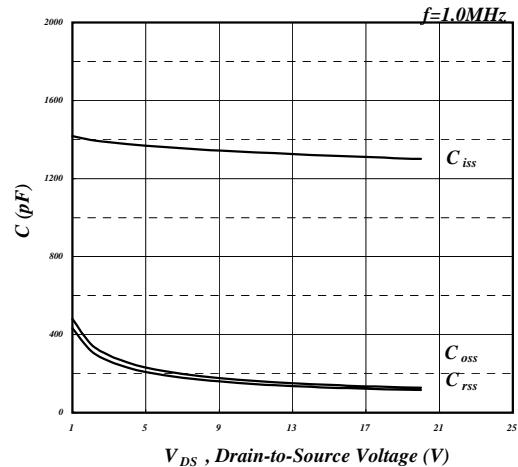


Fig 8. Typical Capacitance Characteristics

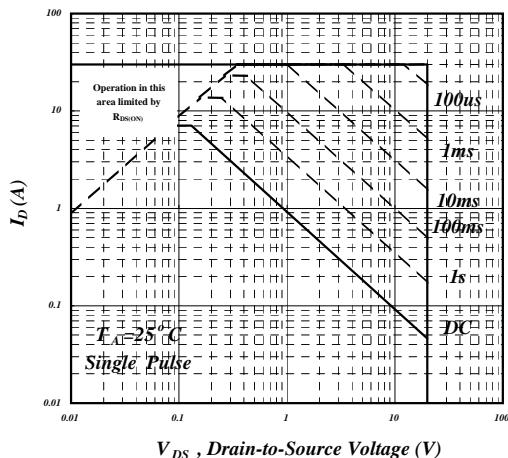


Fig 9. Maximum Safe Operating Area

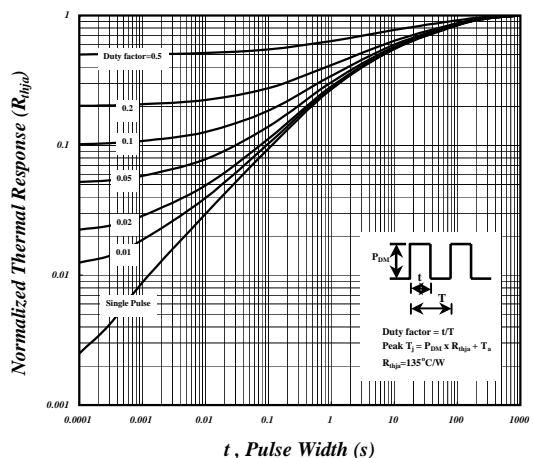


Fig 10. Effective Transient Thermal Impedance

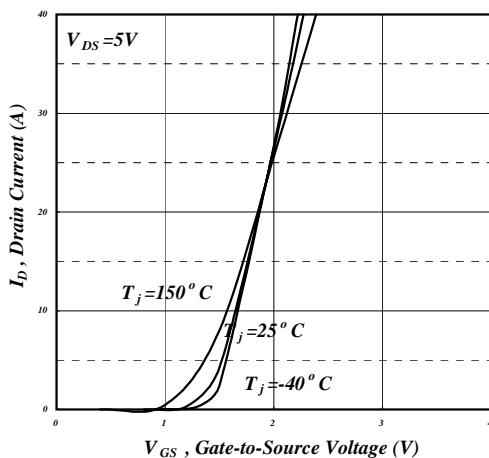


Fig 11. Transfer Characteristics


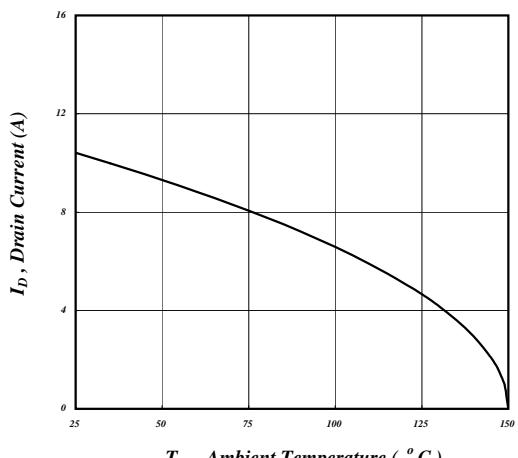


Fig 12. Maximum Continuous Drain Current v.s. Ambient Temperature




# AP4539GM-HF


## P-Channel

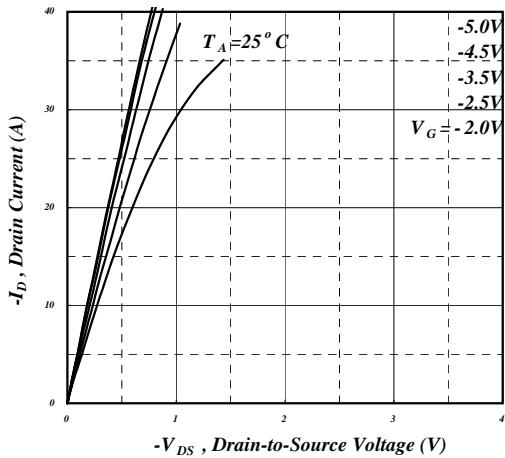


**Fig 1. Typical Output Characteristics**

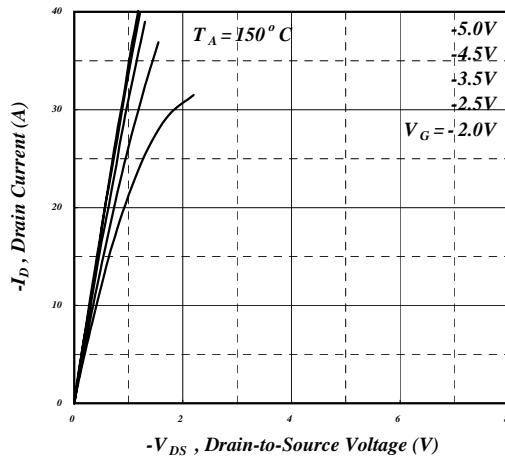


**Fig 2. Typical Output Characteristics**

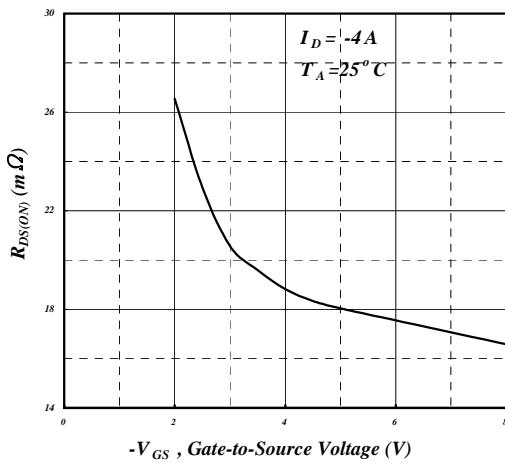


**Fig 3. On-Resistance v.s. Gate Voltage**

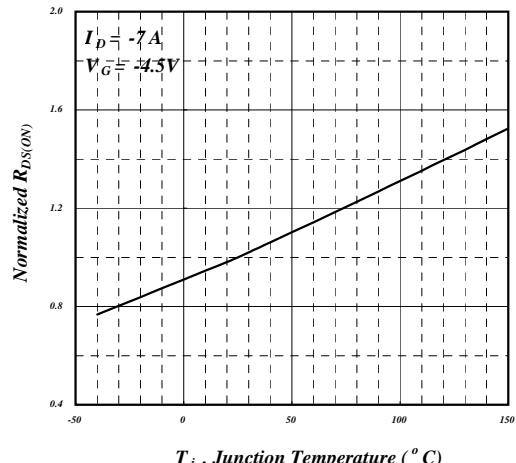

**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

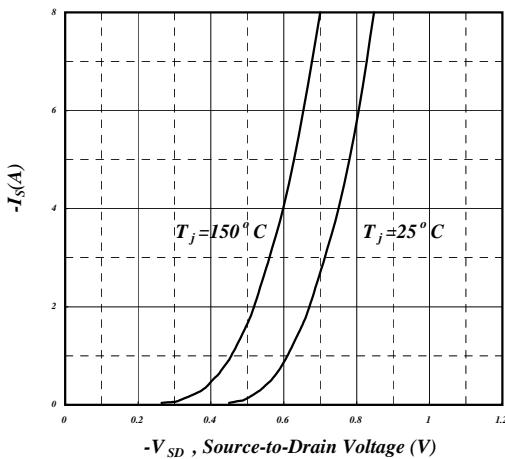

**Fig 5. Forward Characteristic of Reverse Diode**

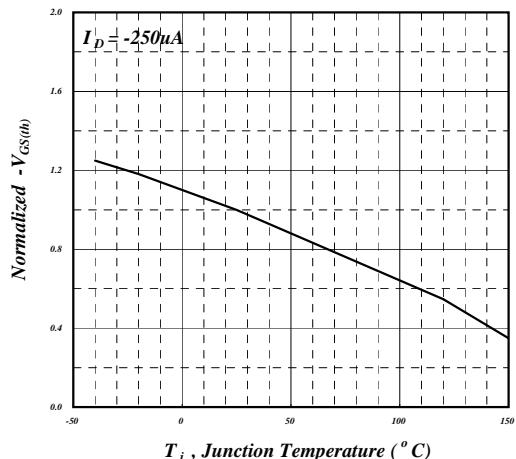

**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**



## P-Channel

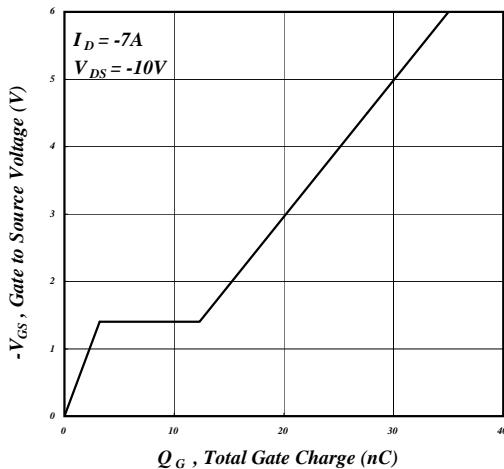


Fig 7. Gate Charge Characteristics

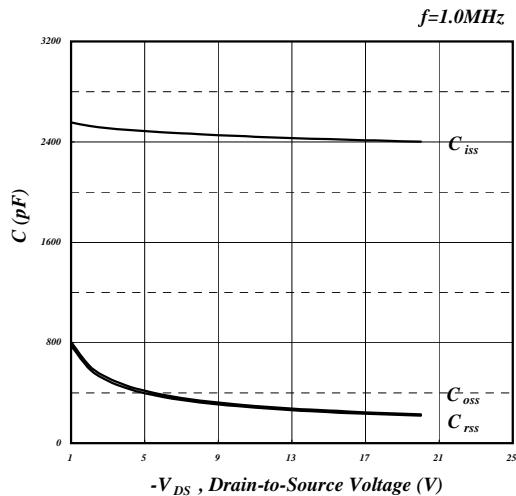


Fig 8. Typical Capacitance Characteristics

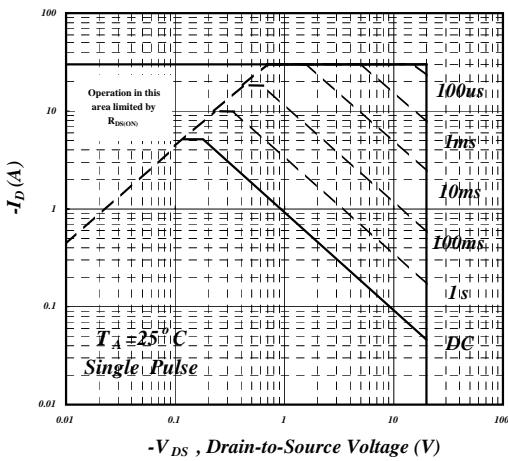


Fig 9. Maximum Safe Operating Area

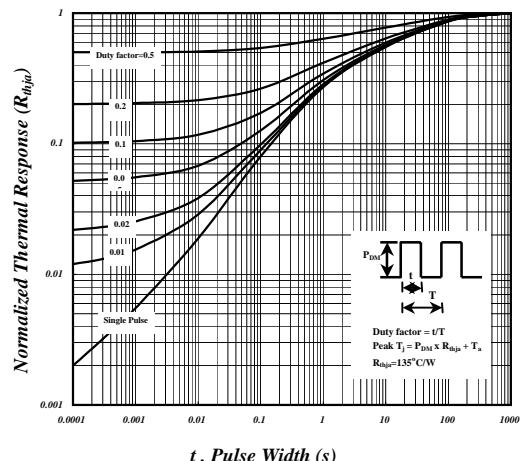


Fig 10. Effective Transient Thermal Impedance

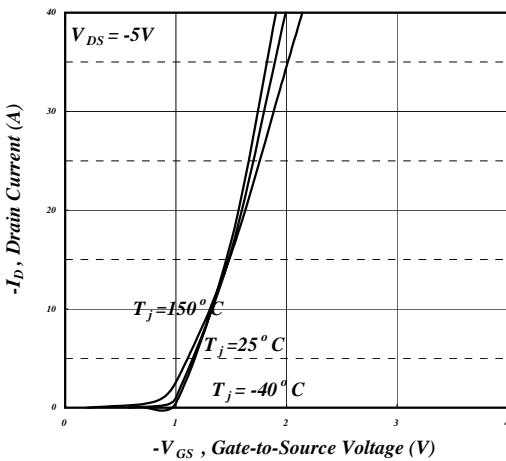


Fig 11. Transfer Characteristics

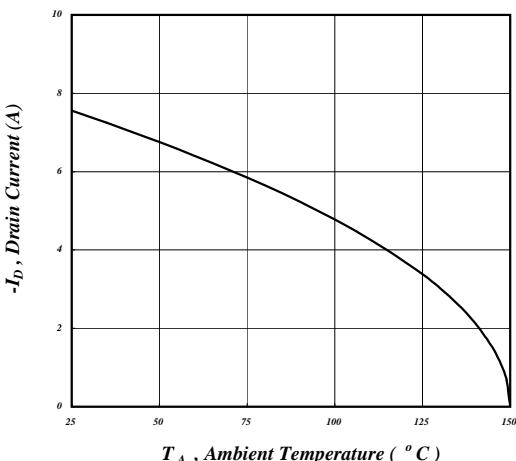


Fig 12. Maximum Continuous Drain Current v.s. Ambient Temperature