


**IDC**

- Industry compatible
- Competitively priced
- Gold Plated contacts
- 2.0mm Pitch

**IDC CABLE SOCKET 2mm PITCH**


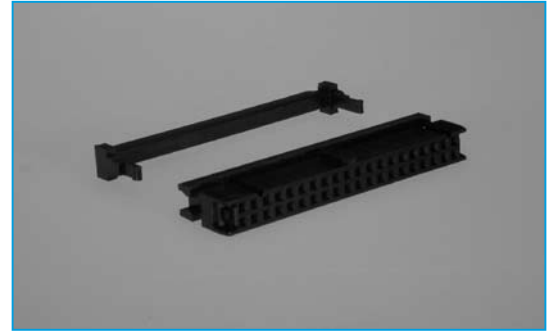


**SPECIFICATION**

**Material & Finish**

<b>Contact Material:</b>	Phosphor Bronze
<b>Insulator Material:</b>	PBT & Glass - Fibre Reinforced UL -94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30mΩ Max
<b>Insulator Resistance:</b>	3000mΩ Min
<b>Dielectric withstanding Voltage:</b>	500v AC for one minute
<b>Operating Temperature:</b>	-40°C to + 105 °C

**OUTLINE DRAWING**

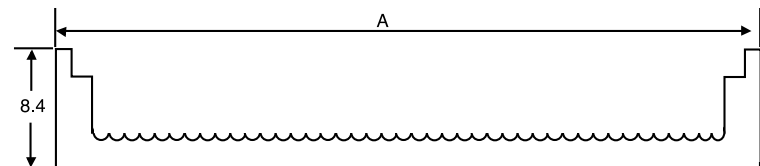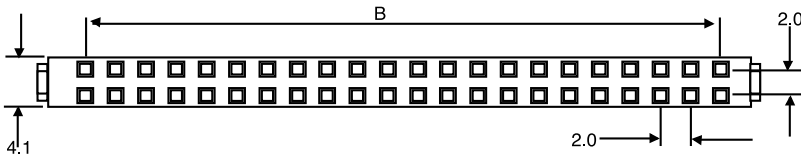

POSITION	A	B
20	25.20	18.00
22	27.20	20.00
24	29.20	22.00
26	31.20	24.00
30	35.20	28.00
34	39.20	32.00
36	41.20	34.00
40	45.20	38.00
44	49.20	42.00
50	55.20	48.00
68	73.20	66.00

SECTION 15

**ORDERING INFORMATION**

DBC	IDC	5	06	A	S	1
Dubilier Connectors	IDC Connectors	Series	N <sup>o</sup> of Ways	Contact Material	Contact Plating	Colour
			20=20way 22=22way 24=24way 26=26way 30=30way 34=34way	Bronze	S =Selective Gold	1=Black
			36=36way 40=40way 44=44way 50=50way 68=68way			