
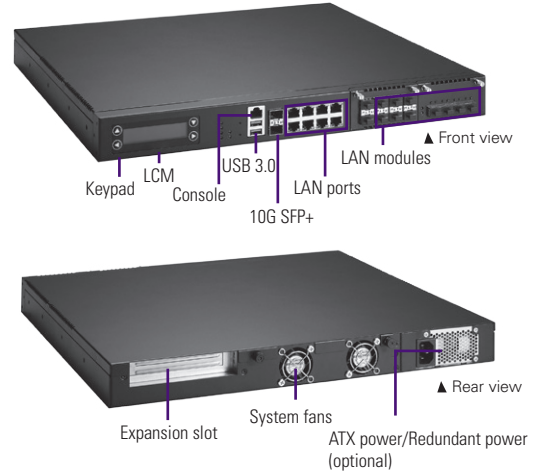


NA720 NEW

1U Rackmount Network Appliance Platform with Intel® Xeon® Processor D-1527/
Pentium® Processor D1508 and 10 LANs

Features

- Intel® Xeon® processor D-1527/Pentium® processor D1508 onboard (Broadwell-DE)
- Four DDR4-2400 R-DIMM/U-DIMM, up to 128GB memory
- Max. up to twenty-four 10/100/1000 Mbps Ethernet ports and two 10 GbE SFP+ ports
- Two expandable LAN modules supporting 1GbE/10GbE/Fiber/Copper/Bypass (optional)
- Supports 1U redundant power supply for optional
- Supports IPMI/TPM (onboard) for optional
- Suitable for enterprise firewall, network bandwidth controller and UTM applications

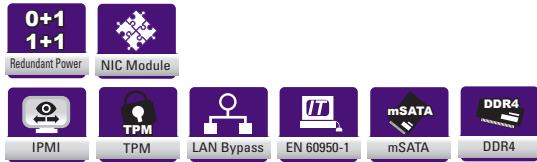

Specifications

System	
CPU	Intel® Xeon® processor D-1527 (Broadwell-DE) Intel® Pentium® processor D1508 (default)
Chipset	SoC Integrated
Memory	4 x DDR4-2400 R-DIMM/U-DIMM, not allowed mixing, up to 128GB non-buffer non-ECC/ECC memory
BIOS	AMI SPI Flash BIOS
Storage	2 x 2.5" SATA HDD 1 x mSATA
Network Interface	8 x 10/100/1000 Mbps Ethernet (Intel® i210) 2 x 10 GbE SFP+ 2 x LAN module (optional), max. up to 26 LAN ports
I/O Interface	1 x RS-232 (RJ-type) 2 x USB 3.0 8 x RJ-45 + 2 x SFP+
Other Features	LAN Bypass function through latch relay (two pairs)
Expansion Slot	1 x PCIe x8 (optional)
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	270 W ATX power supply 280 W 1U redundant power supply (optional)
OS Compatibility	Linux Kernel

Mechanical/ Environmental

Form Factor	1U rackmount
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temp.	0°C ~ +45°C (+32°F ~ +113°F)
Humidity	10% ~ 95% RH, non-condensing
Chassis Material	Steel
Dimensions	44 mm (1.73") (H) x 430 mm (16.93") (W) x 391 mm (15.39") (D)
Weight	8.5 kg (18.74 lb)/9.8 kg (21.61 lb)
Certificates	FCC class A/CE class A

Ordering Information

Standard	
NA720-RAMI-US (P/N: E26E7201000)	1U rackmount network appliance with Intel® Pentium® processor D1508, 8 GbE LANs, 2 x 10 GbE SFP+ and 2-pair LAN Bypass

Optional	
5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco

* Specifications and certifications may vary contingent on options.

Packing List

1 x SATA cable
1 x Power cord

Dimensions

